

5 é / Descriptions

(8)2 (3) D}©%-eOYÿ eOü`ÒU- PÁ‘ äæè††Đ• ož
 (8)2 (3) ,4⁻ ä 359,+ :k äæ† 9 y èy•ž èož
 (8)2 (3) ÄÄ³o4 95: /xk ...±¥~^3o`• 9q•’ò±³o4 U
 - PÁ• ož(8)2 (3) ÄÄ -k yk vk?è^ñÄ Pñ-}‘ kw W
 •ž ô³o zož¥/Ì NN ôÑò—(k- 9%²ä-)eOYÿêeOü`ÒU- Pxž•
 ^ _-’ÍD} • «`ož

The BRCL3230BMC series product is a high integration solution for lithium-ion/polymer battery protection.BRCL3230BMC contains advanced power MOSFET, high-accuracy voltage detection circuits and delay circuits.


BRCL3230BMC is put into an ultra-small SOT23-3 package makes it an ideal solution in limited space of battery pack. BRCL3230BMC has all the protection functions required in the battery application including overcharging, overdischarging, overcurrent and load short circuiting protection etc. The low standby current drains little current from the cell while in storage. The device is not only targeted for digital cellular phones, but also for any other Li-Ion and Li-Poly battery-powered information appliances requiring long-term battery life.

æª / Features

- ⟨ ÄBæè^| SS - ä 359,+ :z
- ⟨ Ý4/x 95: z
- ⟨ ÄBæè 8)k—~`~Û ~^z
- ⟨ “‘ z
- ⟨ - v‘ z
- ⟨ < v‘ y y v k y v k¿ú?è v z
- ⟨ - ~ y z
- ⟨ < P- k• ž•ÄB— k äæ† 9 y z
- ⟨ z²Á vk3oW• vy [‘ -Ñ vy [‘!
- ⟨ —)íD}
- ⟨ Integrate advanced power MOSFET with Equivalent of 25m R_{DS(ON)};
- ⟨ Ultra-small SOT23-3 package;
- ⟨ Internal integration RC without any peripheral devices;
- ⟨ Over-temperature Protection;
- ⟨ Overcharge Current Protection;
- ⟨ Three-step Overcurrent Detection: Overdischarge Current1,Overdischarge Current2,Load Short Circuiting x
- ⟨ Charger detection function;
- ⟨ 0V battery charging function, delay times are generated inside,High-accuracy voltage detection.
- ⟨ Low Current Consumption, Operation Mode: 3.0 A typ,Power-down Mode: 1.7 A typ ;
- ⟨ HF Product;

Đ ÷ / Applications

%/eOYÿ PÁzeOü`Ò PÁož
 One-Cell lithium-ion battery pack; Lithium-Polymer battery pack.

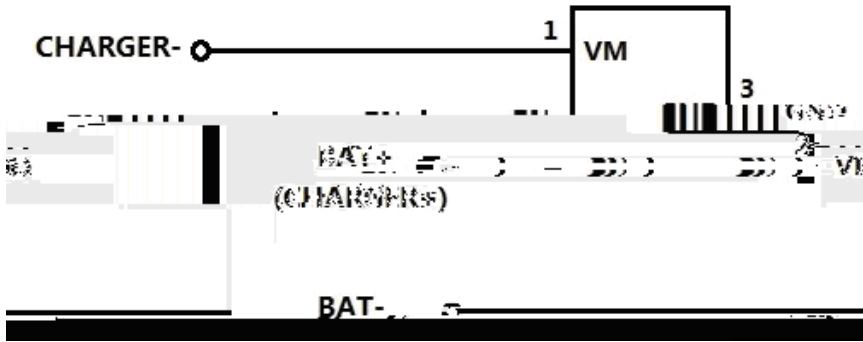

h P y

/ì ô ±Ý /xñ I ÂÝ ôož

ÎD}ÀÄ...² ' kx }Ý D}ÂÝ I² ož

Notes Ö

(1) The chip power consumption shall not exceed the maximum power cons

BRCL3230BMC

Rev.A Aug.-2019




DATA SHEET

@ f/Parameter	... Z/Symbol	f › /Value	% y/Unit
V _{DD} input pin voltage	V _{IN}	-0.3 to +6	V
V _M input pin voltage	V _{VM}	-6 to +10	V
Power Dissipation	P _D	400	mW
Maximum Junction Temperature	T _J	125	
Lead Temperature	T _L	300	
Operating Junction Temperature	T _{opr}	-40 to +85	
Storage Temperature	T _{stg}	-55 to +150	
Package Thermal Resistance	R _{JA}	250	/W

Electrical Characteristics ($T_a=25^\circ\text{C}$;)

Equivalent FET on Resistance						
Equivalent FET on Resistance	R_{DS}	$V_{DD}=3.6V$ $I_{VM}=1A$	15	25	40	m
Over temperature protection						
Over Temperature Protection	OTP		125	140	155	
Over Temperature Recovery Degree	OTPR		100	115	130	
Delay time						
Overcharge Current Detection Delay Time	T_{OCC}	$V_{DD}=3.6V$	5.6	8	10.4	ms
Overcharge Voltage Detection Delay Time	T_{CU}	$V_{DD}=3.6V$ $4.4V$	95	135	175	ms
Overdischarge Voltage Detection Delay Time	T_{DL}	$V_{DD}=3.6V$ $2.0V$	25	35	45	ms
Overdischarge Current1 Detection Delay Time	T_{IOV1}	$V_{DD}=3.6V$	5.6	8	10.4	ms
Overdischarge Current2 Detection Delay Time	T_{IOV2}	$V_{DD}=3.6V$	0.7	1	1.3	ms
Load Short-Circuiting Detection Delay Time	T_{SHORT}	$V_{DD}=3.6V$		100	300	us

Function Block Diagram

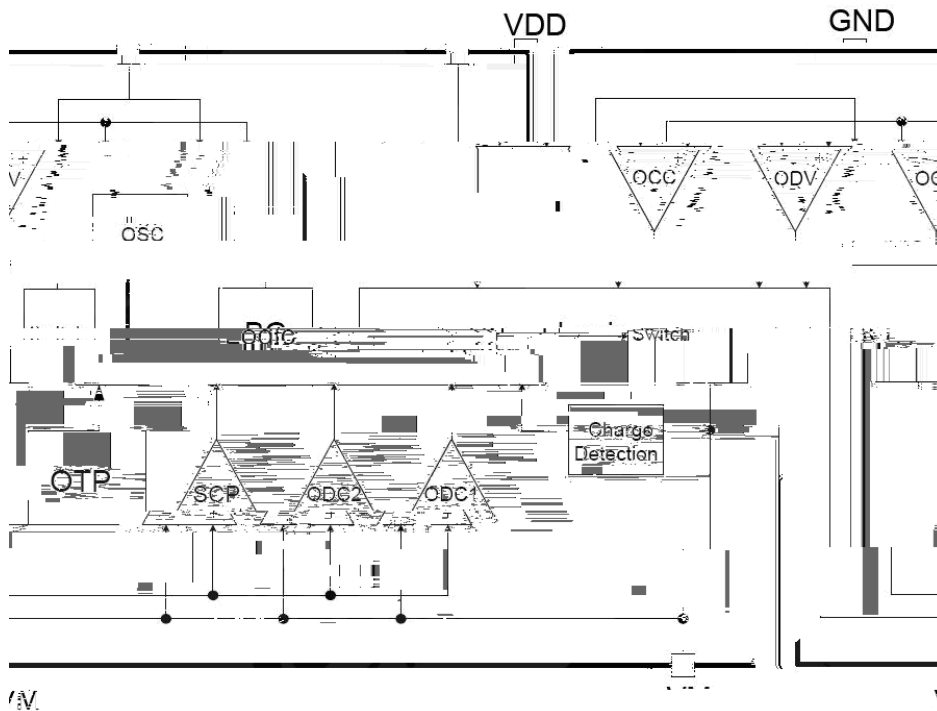

× 5 é	Functional Description
(8) 2	(3)

BRCL3230BMC
Rev.A Aug.-2019

Ú - Ô 85Š Đ

Ú Z Ô W5Š Ď Overcurrent Condition

3 o W • % " k ϕ y v ^ 9 ê ä 9 — > g < 3 9 ^ 9 ê ä 9 v y 9 h w 4 Ô ž
 • ñ y v y • ž • (8)2 (3)¼ • y , + : k 2 y ož _ Õ Ñ f y v Õ Ñ g
 , y v k y v y ž ú ? è v h ož y v Õ Ñ < 3 y - 4 * t 8 < 3 9 Š Ě ? N 4 ož ϕ %²
 ž ú N k < 3 9 ^ 9 < * * x > ž ú Š 9 ož
 9 < 3 y - 4 * \$ • N 8 < 3 9 Š k ϕ ž ú • • k < 3 9 t ñ^a y ož ϕ y ñ < 3 y z 9 v
 y 9 k / Ì › ñ 3 o Ù Á ož

When the discharging current becomes equal to or higher than a specified value (the VM pin voltage is equal to or higher than the overcurrent detection voltage) during discharging under normal condition and the state continues for the overcurrent detection delay time or longer, the BRCL3230BMC turns off the discharging control FET to stop discharging. This condition is called overcurrent condition. (The overcurrent includes overcurrent, or load shortcircuiting.) The VM and GND pins are shorted internally by the RVMS resistor under the overcurrent condition. When a load is connected, the VM pin voltage equals the VDD voltage due to the load.

Because of the connection between the VM and the GND by the RVMS resistor k when the load is removed, the VM pin goes back to the GND potential since the VM pin is shorted the GND pin with the RVMS resistor. Detecting that the VM pin potential is lower than the overcurrent detection voltage (VIOV1), the IC returns to the normal condition.

• n - Ô Ô W ó Z Abnormal Charge Current Detection

3 o - ž k ò ϕ < 3 9 ' ñ - y 9 Y <) . ' k w 4 Ô ž • Ý - v y • ž ž •
 :) ; k (8)2 (3)¼ • - , + : 2 - ož _ Õ Ñ f ' o - v y ož
 • • - ~ k < 3 y - 4 * \$ • 9 ä 9 - ~ y 9 <) . ' ž k ' o - v % " † " ož 9 < P
 - i - ' ä 9 3 o v - y k P 9 @ z P 3 " g < - ž k ' o - v y
 1 W • ož

If the VM pin voltage drops below the charger detection voltage (VCHA) during charging under the normal condition and it continues for the overcharge detection delay time (TCU) or longer, the BRCL3230BMC turns the charging control FET off and stops charging. This action is called abnormal charge current detection.

Abnormal charge current detection is released when the voltage difference between VM pin and GND pin becomes higher than the charger detection voltage (VCHA) by separating the charger. Since the 0 V battery charging function has higher priority than the abnormal charge current detection function, abnormal charge current may not be detected by the product with the 0 V battery charging function while the battery voltage is low.

Ž É -5Š Ď Load Short-circuiting Condition

ò ϕ < 3 9 ä 9 ? è ' 9 g < 9 . 5 8 : h k w 4 Ô ž • Ý ? è y • ž • g Z 9 . 5 8 : h k
 (8)2 (3)1 ž ú • • 2 y ož ϕ < 3 9 z 9 ? è ' 9 g < 9 . 5 8 : h ž k † ò ž ú t g
 " k ž ú ? è Õ Ñ 1 † " ož

If voltage of VM pin is higher short circuiting protection voltage (VSHORT) and it continues for the tSHORT or longer, the BRCL3230BMC will stop discharging and battery is disconnected from load. This status is released when voltage of VM pin is higher than short protection voltage (VSHORT), such as when disconnecting the load.

< 0V Battery Charging Function

4 9+]Æ y ñ < P gÇ- ožç- ~V žkk* ÄB8â'ÛË P g-
kç P 9ä9 y y 9g<*2hžk' /) μ3oW•ÙÁož
hy î? ¶ y e Pk a•tÇ)- k © eO P ÔÁĐ ož-π| P^•œk
G•ñÆ1 P©kÀÕ a•g < P- k © W2g < P- ož
a•g < P- A - v y i'¼äožœ4 ... a•g < P-
/)k" P 9ûz ž~k ò- ož P 9z9 y y 9g<*2hY žk
g- vÙÁ yož
ç P†%²)N ' èžk èU k μ3o%"k4ž—cy ožòçDÿ _ë»k
...<3' 9^9-4* 9g1<3 -4*?èê N- ~h k<UY μ3o%"ož


This function enables the charging of a connected battery whose voltage is 0V by self-discharge. When connects to a charger , the discharging control FET is off and the charging current flows through the internal parasitic diode in the discharging control FET. If the battery voltage becomes equal to or higher than the overdischarge release voltage (VDL), the normal condition returns.

Notes y


- (1) Some battery providers do not recommend charging of completely discharged batteries. Please refer to battery providers before the selection of 0 V battery charging function.
- (2) The 0V battery charging function has higher priority than the abnormal charge current detection function. Consequently, a product with the 0 V battery charging function charges a battery and abnormal charge current cannot be detected during the battery voltage is low.
- (3) When a battery is connected to the IC for the first time, the IC may not enter the normal condition in which discharging is possible. In this case, set the VM pin voltage equal to the GND voltage (short the VM and GND pins or connect a charger) to enter the normal condition.

• } ϕ Timing Chart

- \hat{O} — \acute{o} Z Charger Detection

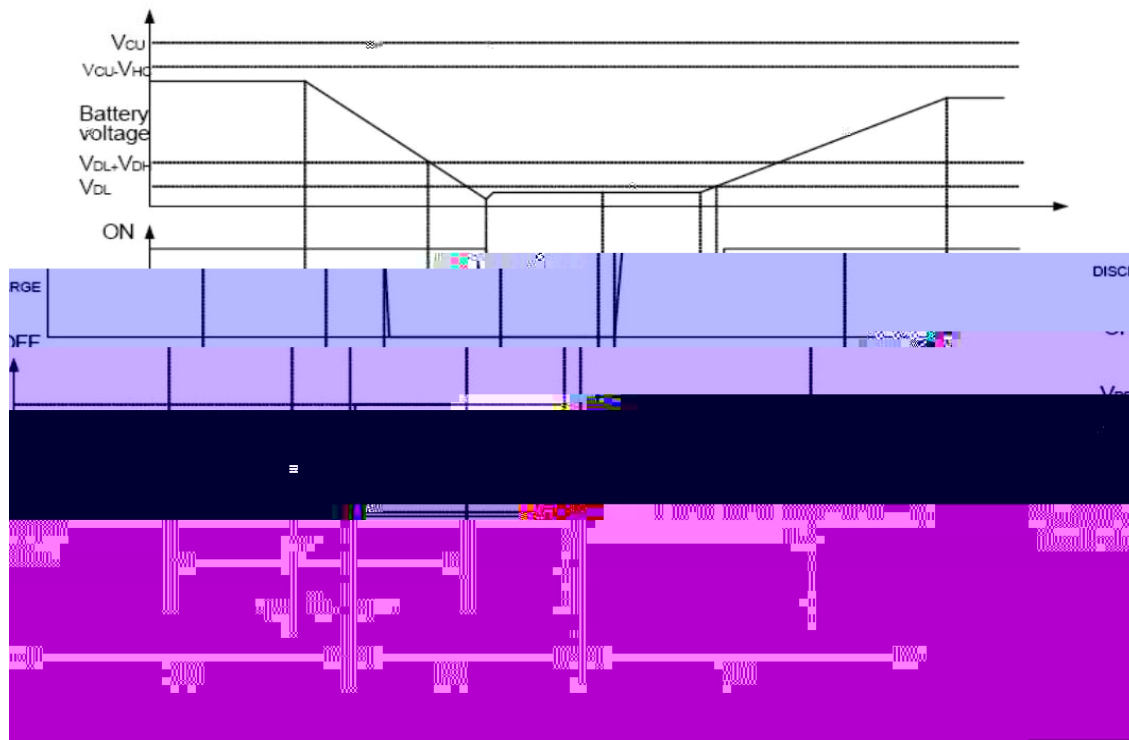


Ø \square =) ϕ / Package Dimensions

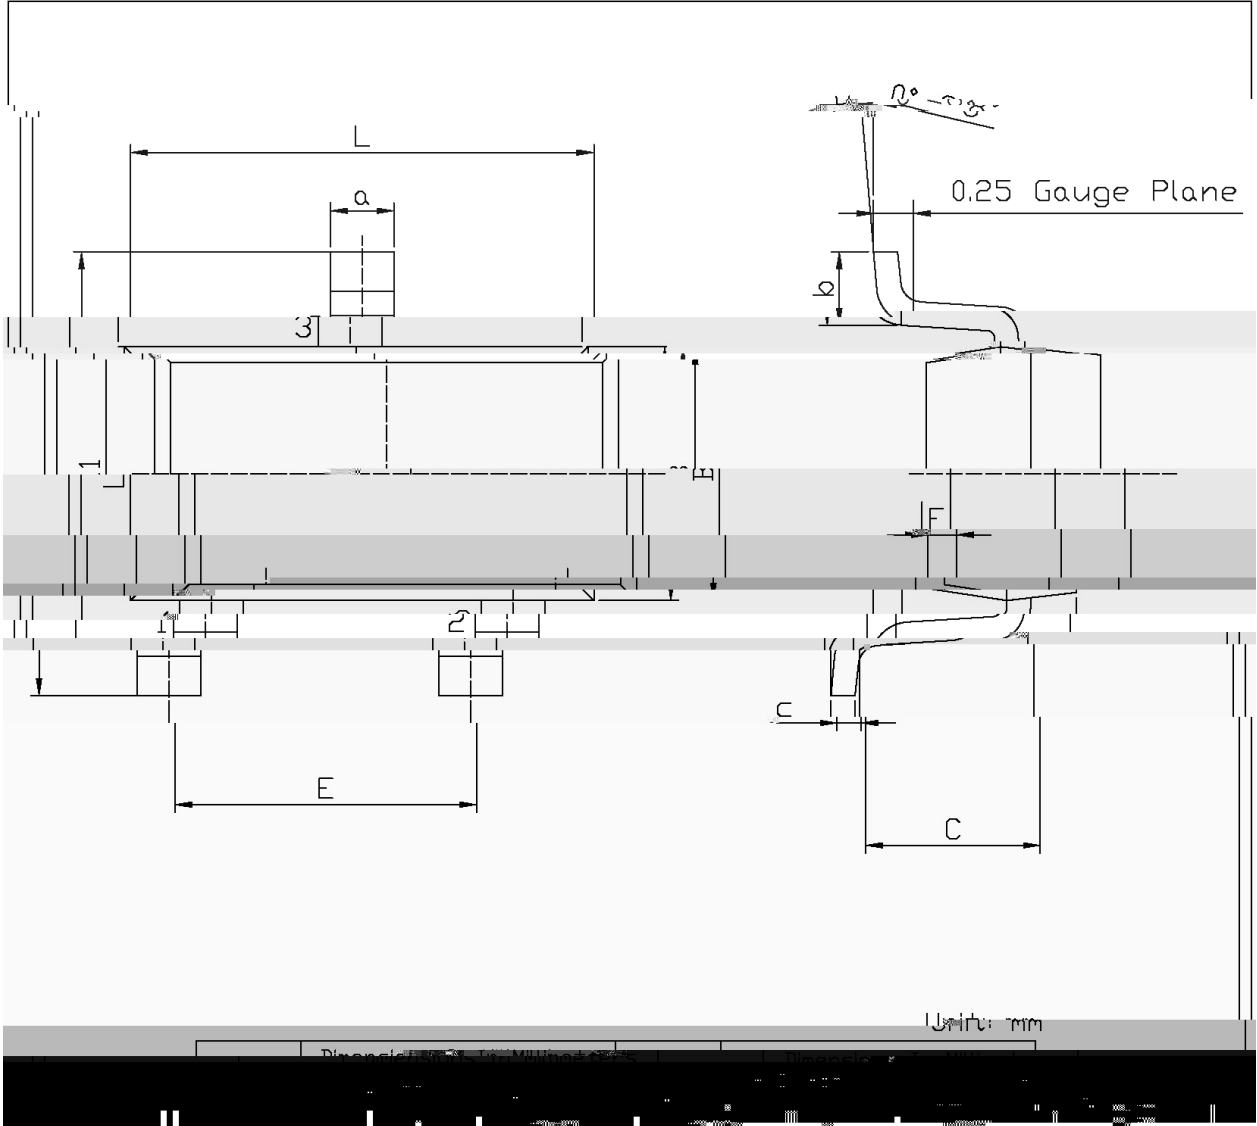


BRCL3230BMC

Myf / Marking Instructions

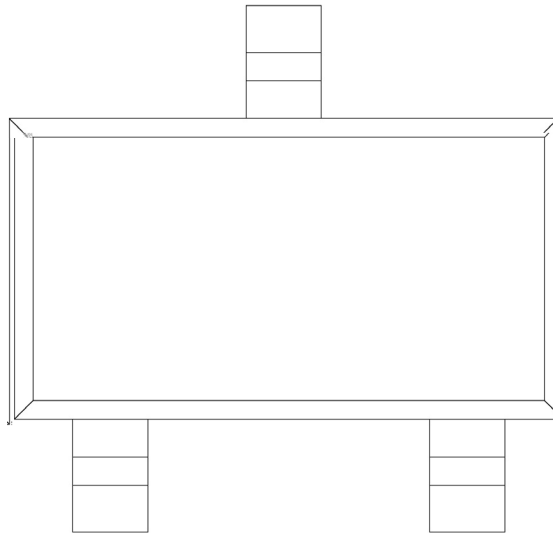

^aφy
(y D }°Z
y ÿD ZW AkšÿD ZJ ož
Note:

šWD t... • Žϕ (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

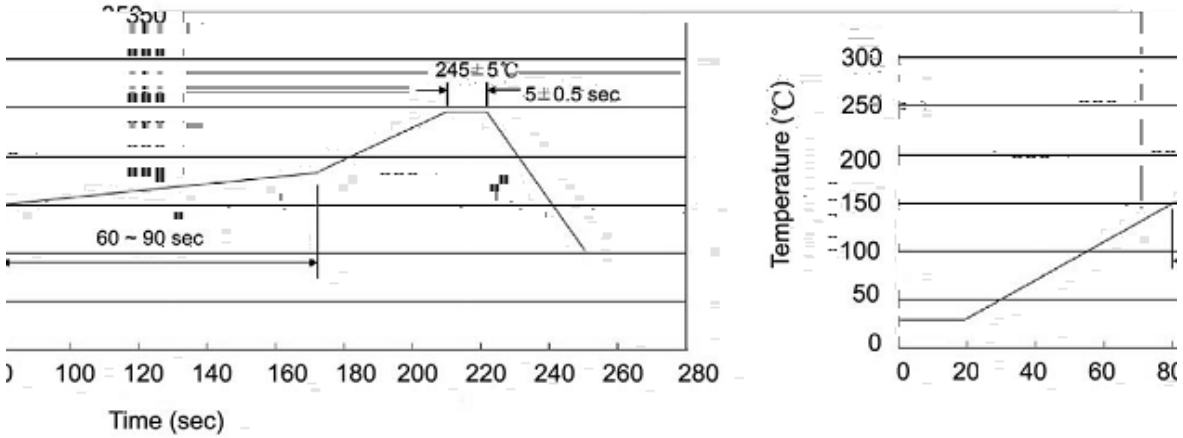

^a ϕ y

- 1o• Ä ½ " † 150 ½180 - k ž • 60 ½90sec;
- 2o• Q › " † 245 r5 - k ž • 4 Ò 5 r0.5sec;
- 3o•D N ò i Ò 0 , † 2 ½10 - /sec.

Note:

- 1.Preheating:150480 - , Time:6090sec.
- 2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.
- 3. Cooling Speed: 240 - /sec.

ÂD /Cã p ¯ »] / Resistance to Soldering Heat Test Conditions

" † y 260 r5 - ž • y 10 r1 sec. Temp.:260 r5 - Time:10 r1 sec

G P á / Packaging SPEC.

2 & x / REEL

6GIQGMK	;TOZY xfo				*OSKTYOUT x>* [TOZySS			
/x¥"	;TOZY	3K4KRY /TT	KKOZM /TT	KKKU(U^KY 5	ZIKZYU5[Z	KX (U	/TTKX	(U^" 5[ZKX (U^"
SOT-23-3	Q 2&	2& "	Q "	" "	Q "	8KKR		
	3,000	10	30,000	4	120,000	s x8	210x205x205	445x230x435

„Đ y f / Notices