

Rev.E Sep.-2016

TO-3P

PNP



Silicon PNP transistor in a TO-3P Plastic Package.

200W

MJW21194

Recommend for 200W high fidelity audio frequency amplifier output stage, Complementary to MJW21194.

Power amplifier applications.

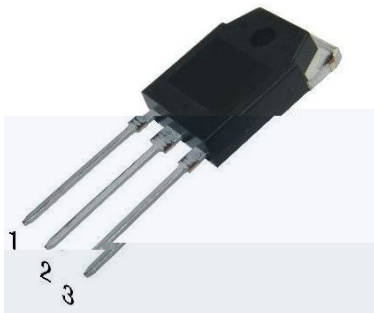

PIN1 Base


PIN 2 Collector


PIN 3 Emitter


See Marking Instructions.

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	-400	V
Collector to Emitter Voltage	$V_{CEO}$	-250	V
Emitter to Base Voltage	$V_{EBO}$	-5	V
Collector Current - Continuous	$I_C$	-16	A
Peak Collector Current	$I_{CP}$	-30	A
Base Current	$I_B$	-5.0	A
Collector Power Dissipation	$P_C(TC=25^\circ C)$	200	W
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	$V_{CBO}$	$I_C=-100mA$ $I_B=0$	-250			V
Collector Cut-Off Current	$I_{CEO}$	$V_{CE}=-200V$ $I_E=0$			-100	A
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=-250V$ $I_E=0$			-100	A
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=-5.0V$ $I_C=0$			-100	A
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-5.0V$ $I_C=-8.0A$	10		80	
	$h_{FE(2)}$	$V_{CE}=-5.0V$ $I_C=-16A$	8			
Collector to Emitter Saturation Voltage	$V_{CE(sat)(1)}$	$I_C=-8.0A$ $I_B=-0.8A$			-4	V
	$V_{CE(sat)(2)}$	$I_C=-16A$ $I_B=-3.2A$			-6	V
Base to Emitter Voltage	$V_{BE}$	$V_{CE}=-5.0V$ $I_C=-8.0A$			-2.2	V
Transition Frequency	$f_T$	$V_{CE}=-10V$ $f=1.0MHz$ $I_C=-1A$	4			MHz
Collector output capacitance	$C_{ob}$	$V_{CB}=-10V$ $f=1.0MHz$ $I_E=0$			500	pF

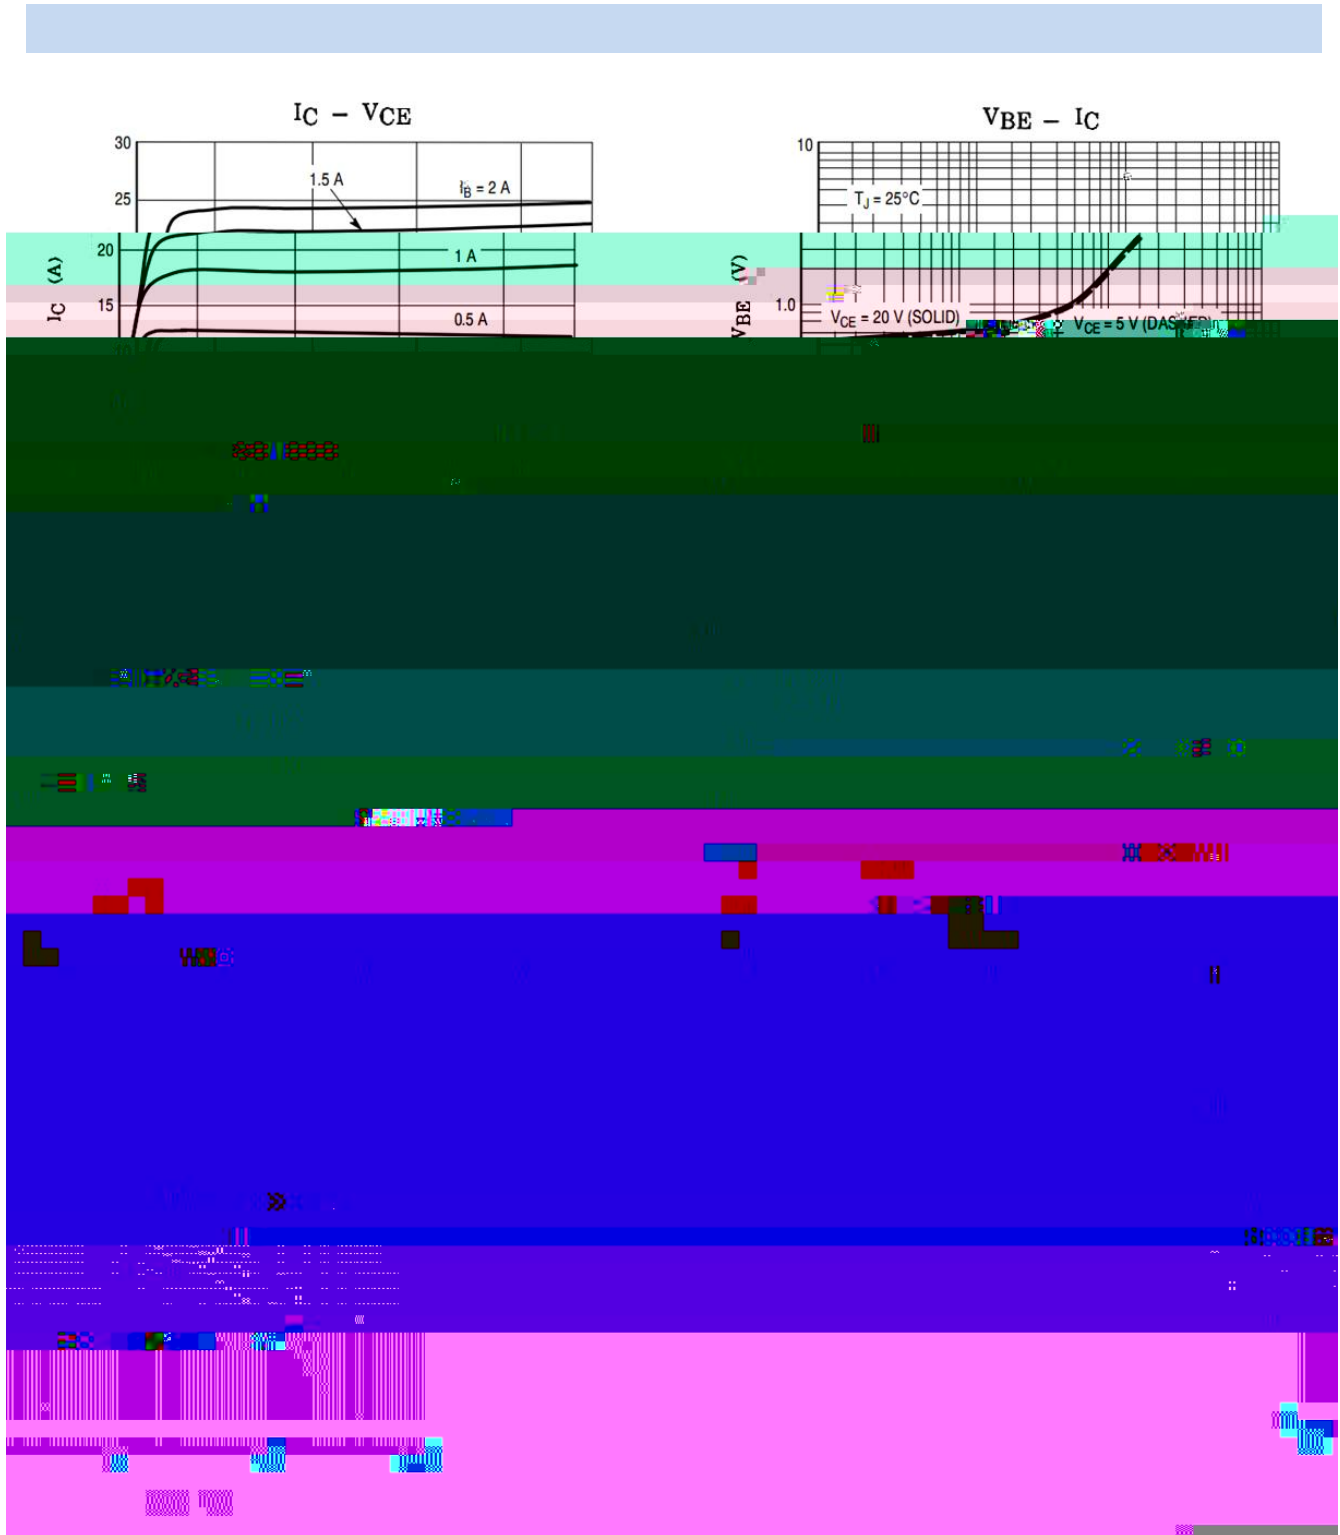

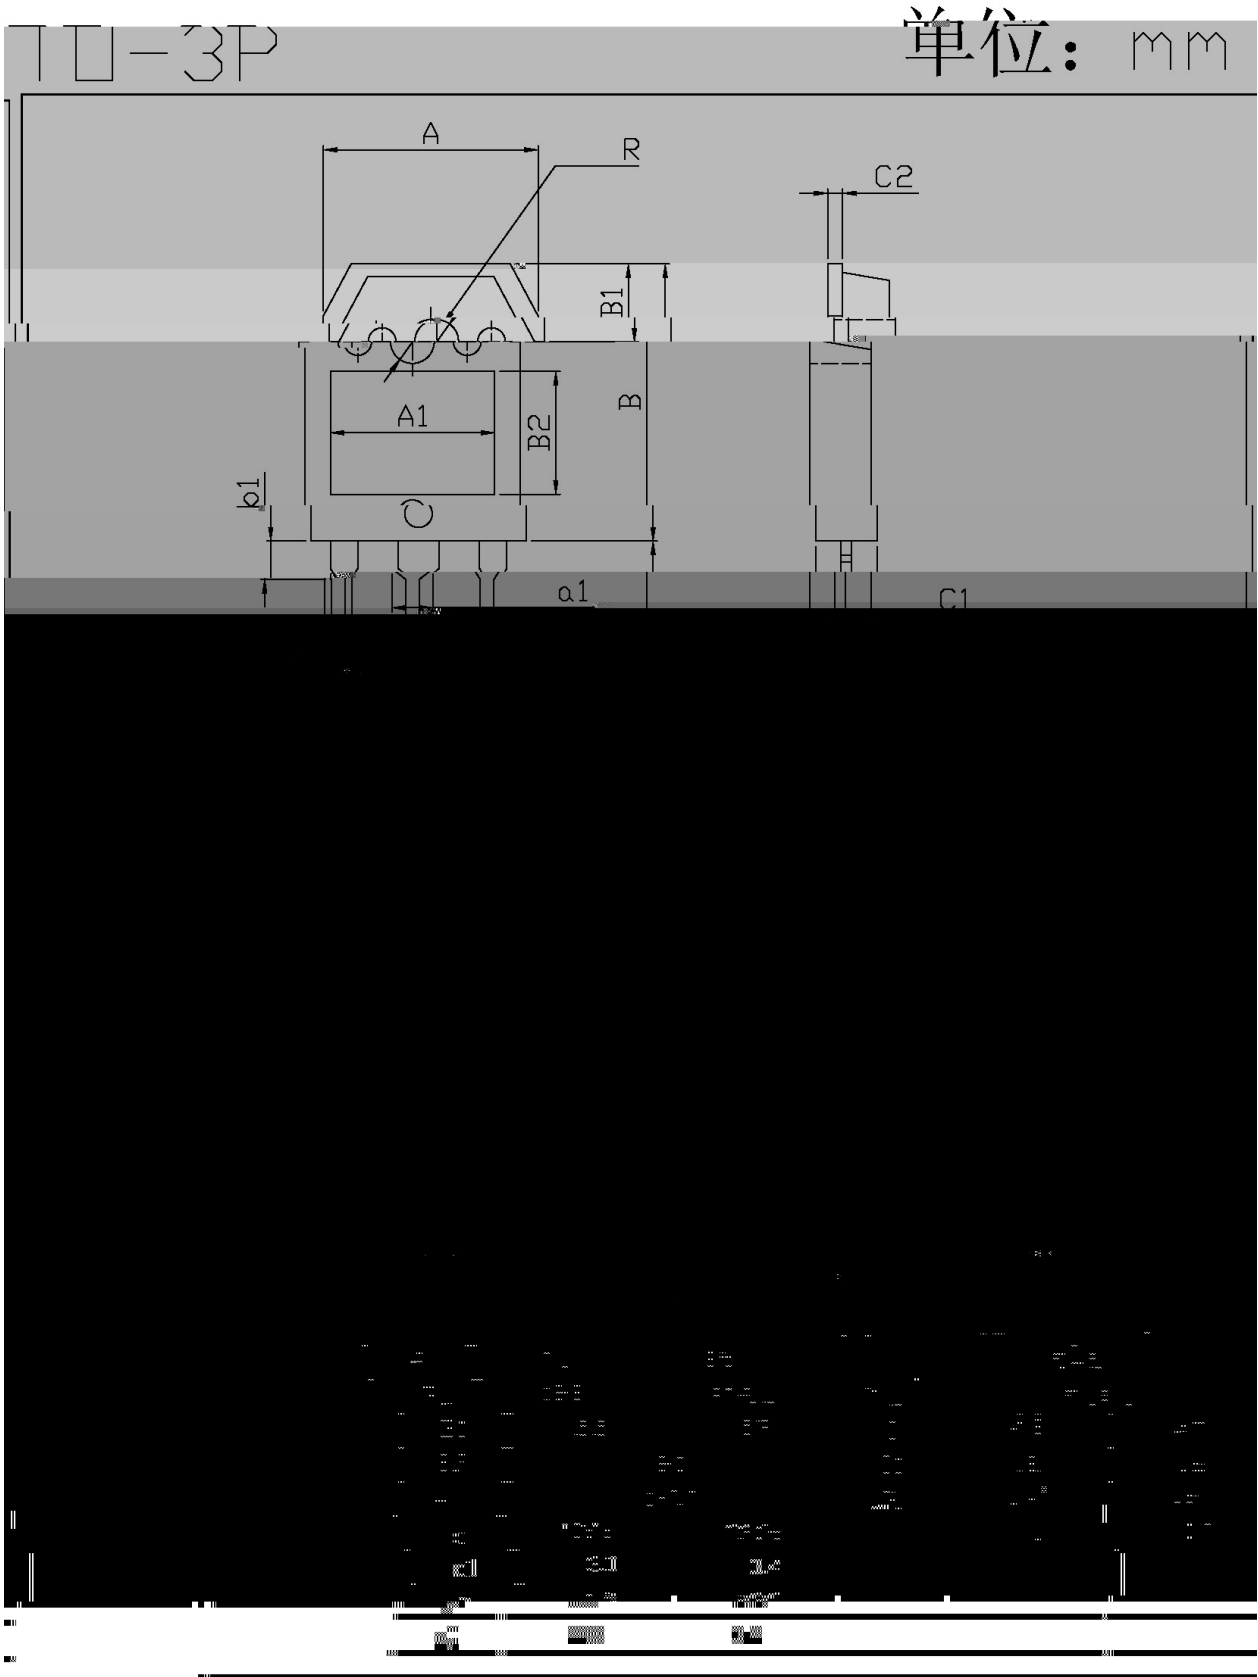

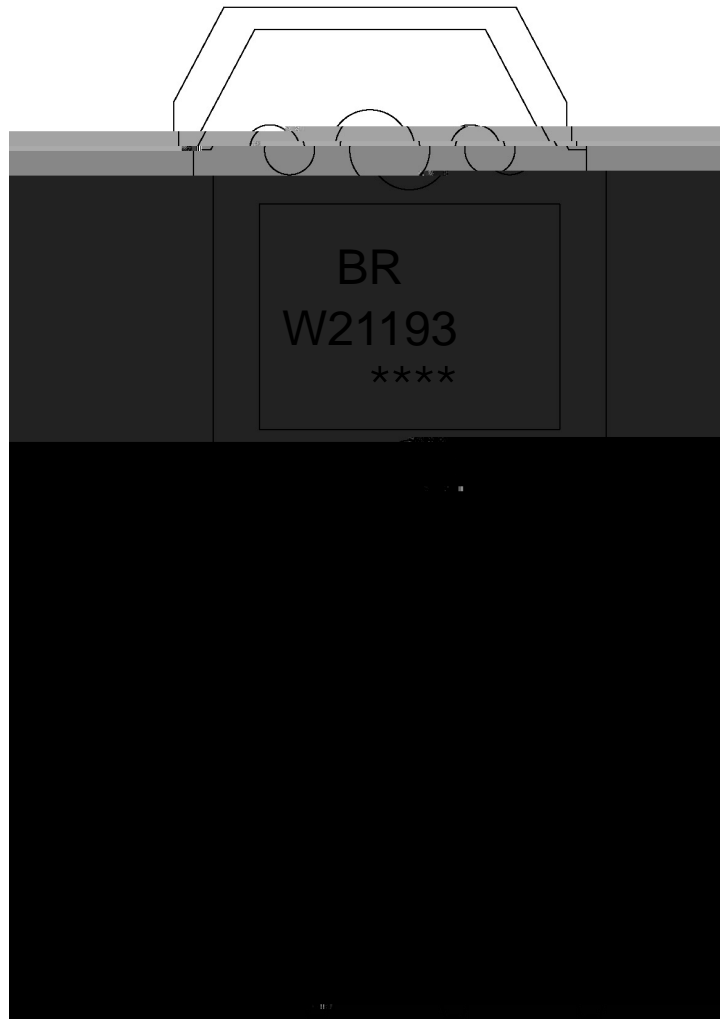

BR:

W21193

\*\*\*\*

Note:

BR: Company Code.

W21193: Product Type.

\*\*\*\*: Lot No. Code, code change with Lot No.



1	25	150	60	90sec;	Note:	1.Preheating:25~150 , Time:60~90sec.
2	255±5		5±0.5sec;		2.Peak Temp.:255±5 , Duration:5±0.5sec.	
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.	

270±5                      10±1 sec.                      Temp.:270±5                      Time:10±1 sec

/ TUBE

Package Type	Units	Dimension	(unit mm <sup>3</sup> )	Volume	Weight
--------------	-------	-----------	-------------------------	--------	--------