



G		\$ /	$V_{GS(th)}$ $V_{DS}=10V$ $I_D=1mA$ $V_{DS}=V_{GS}$ $I_D=250\mu A$	% & ' 8 9	() * () *
			+ , - . / 0 1 2 3 4 5 0 1 6 7		




Rev.I May.-2022

SOT-23: ; ; < N = > MOS ? @ A B C N-CHANNEL MOSFET in a SOT-23 Plastic Package.

DEIF! GHI JKLMN I OPJKCQJ RST C O 1 6 7 C
Sensitive gate trigger current and Low Holding current.ESD protected up to 1KV. HF product.

UVWX I Y Z L [\ F ! C
Intended for use in general purpose switching and phase control applications.



PIN 1] G PIN 2] S PIN 3] D


Marking	H702
---------	------


Rev.I May.-2022



Rev.I May.-2022

单位: mm SET-23

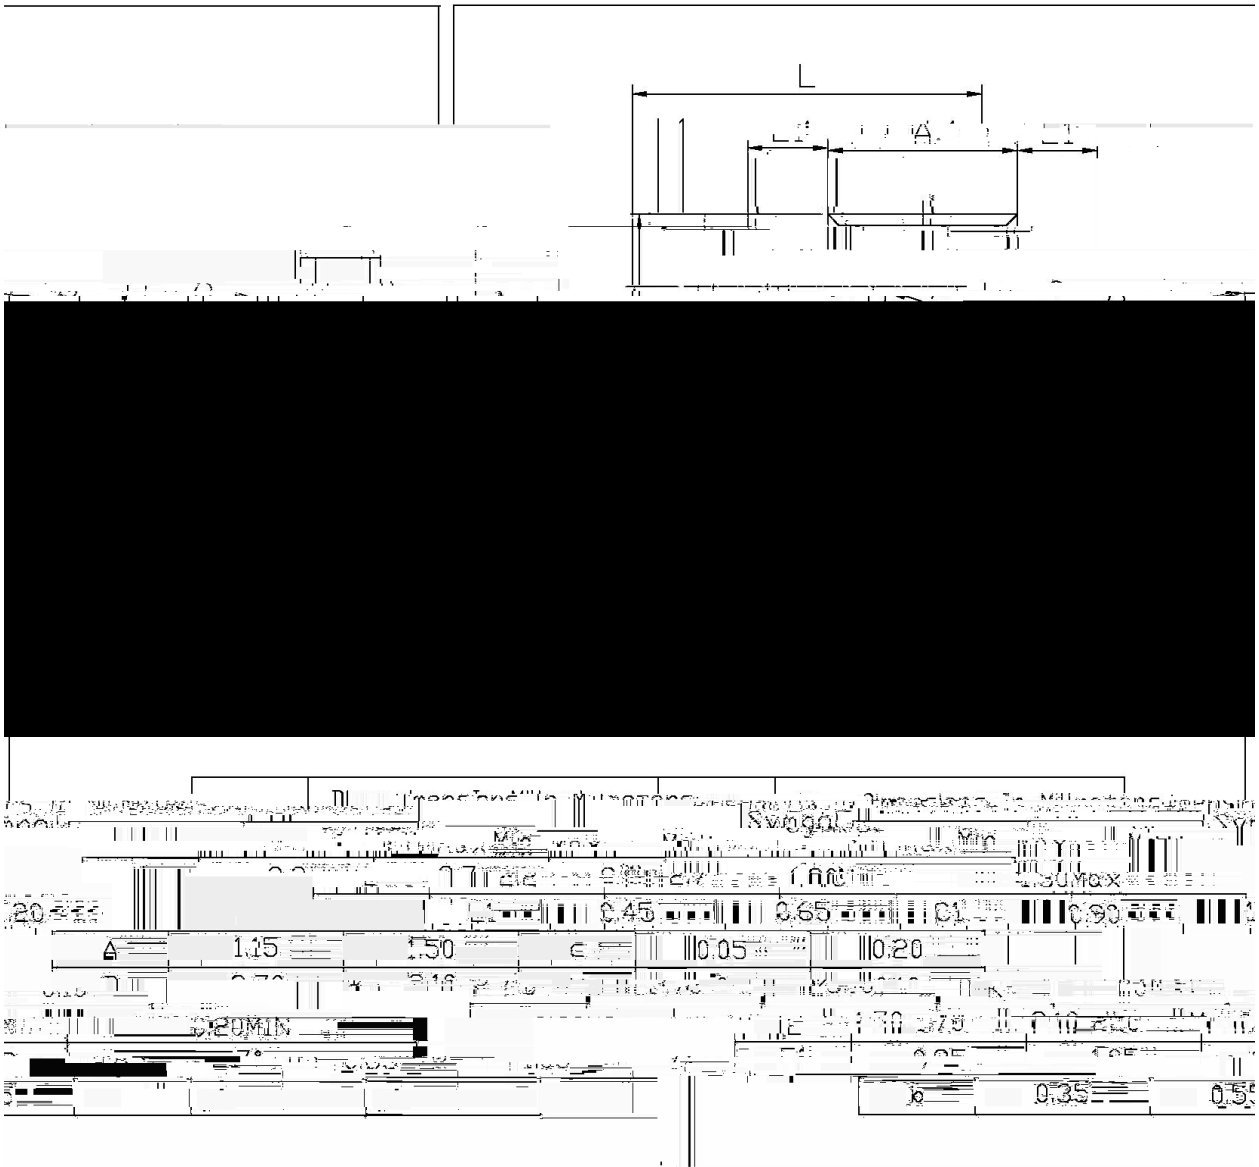

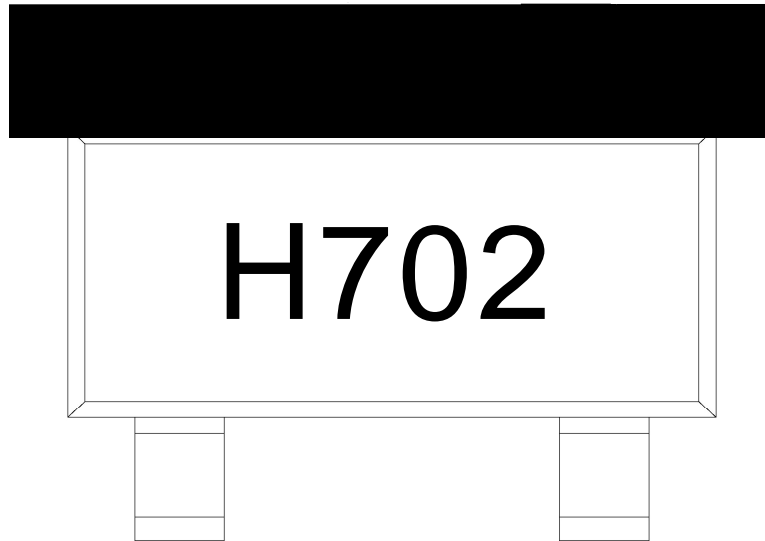

mn]

H] o p q r fi

702] o k a r fi

Note:

H: Company Code

702: Product Type



Rev.I May.-2022



1	150 180	60 90sec;	Note: 1.Preheating:150~180 , Time:60~90sec. 2.Peak Temp.:245±5 , Duration:5± 0.5sec. 3. Cooling Speed: 2~10 /sec.
2	245±5	5± 0.5sec;	
3	2 10	/sec.	



260±5	10± 1 sec.	Temp.:260±5℃	Time:10±1 sec
-------	------------	--------------	---------------



/ REEL

Package Type 封装形式	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units 包装数量 Unit/Inner Box 只/盒	Dimension 包装尺寸 (unit: mm ³)
----------------------	--------------------	-------------------------	-------------------------------------	---