


Silicon PNP transistor in a TO-92 Plastic Package.

Excellent h_{FE} linearity, complementary pair with 2SC1740.


General purpose applications.



PIN1 Base PIN 2 a3TJ/TT7 1 Tf79.0971 0TD0 Tc0 Tw079Fj/TT4 1 Tf1 0 TD-0.0002 Tc1[E]-37(sm)-374(it)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-6.0	V


/ Electrical Characteristic Curve

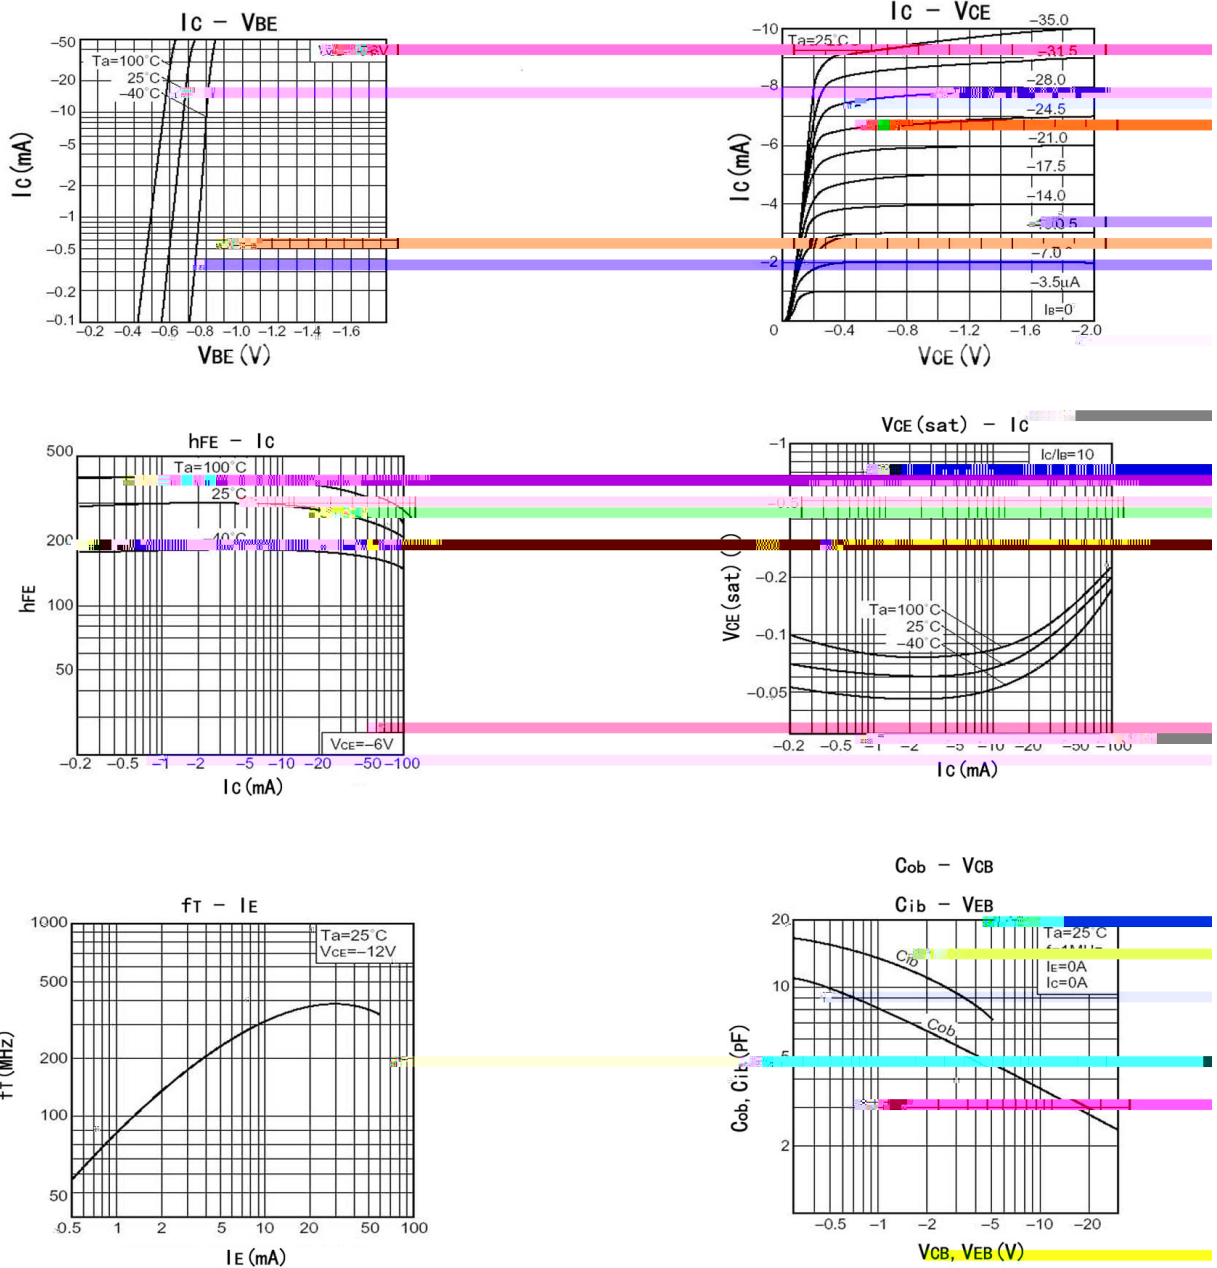


/ Package Dimensions

T0-92

Unit: mm

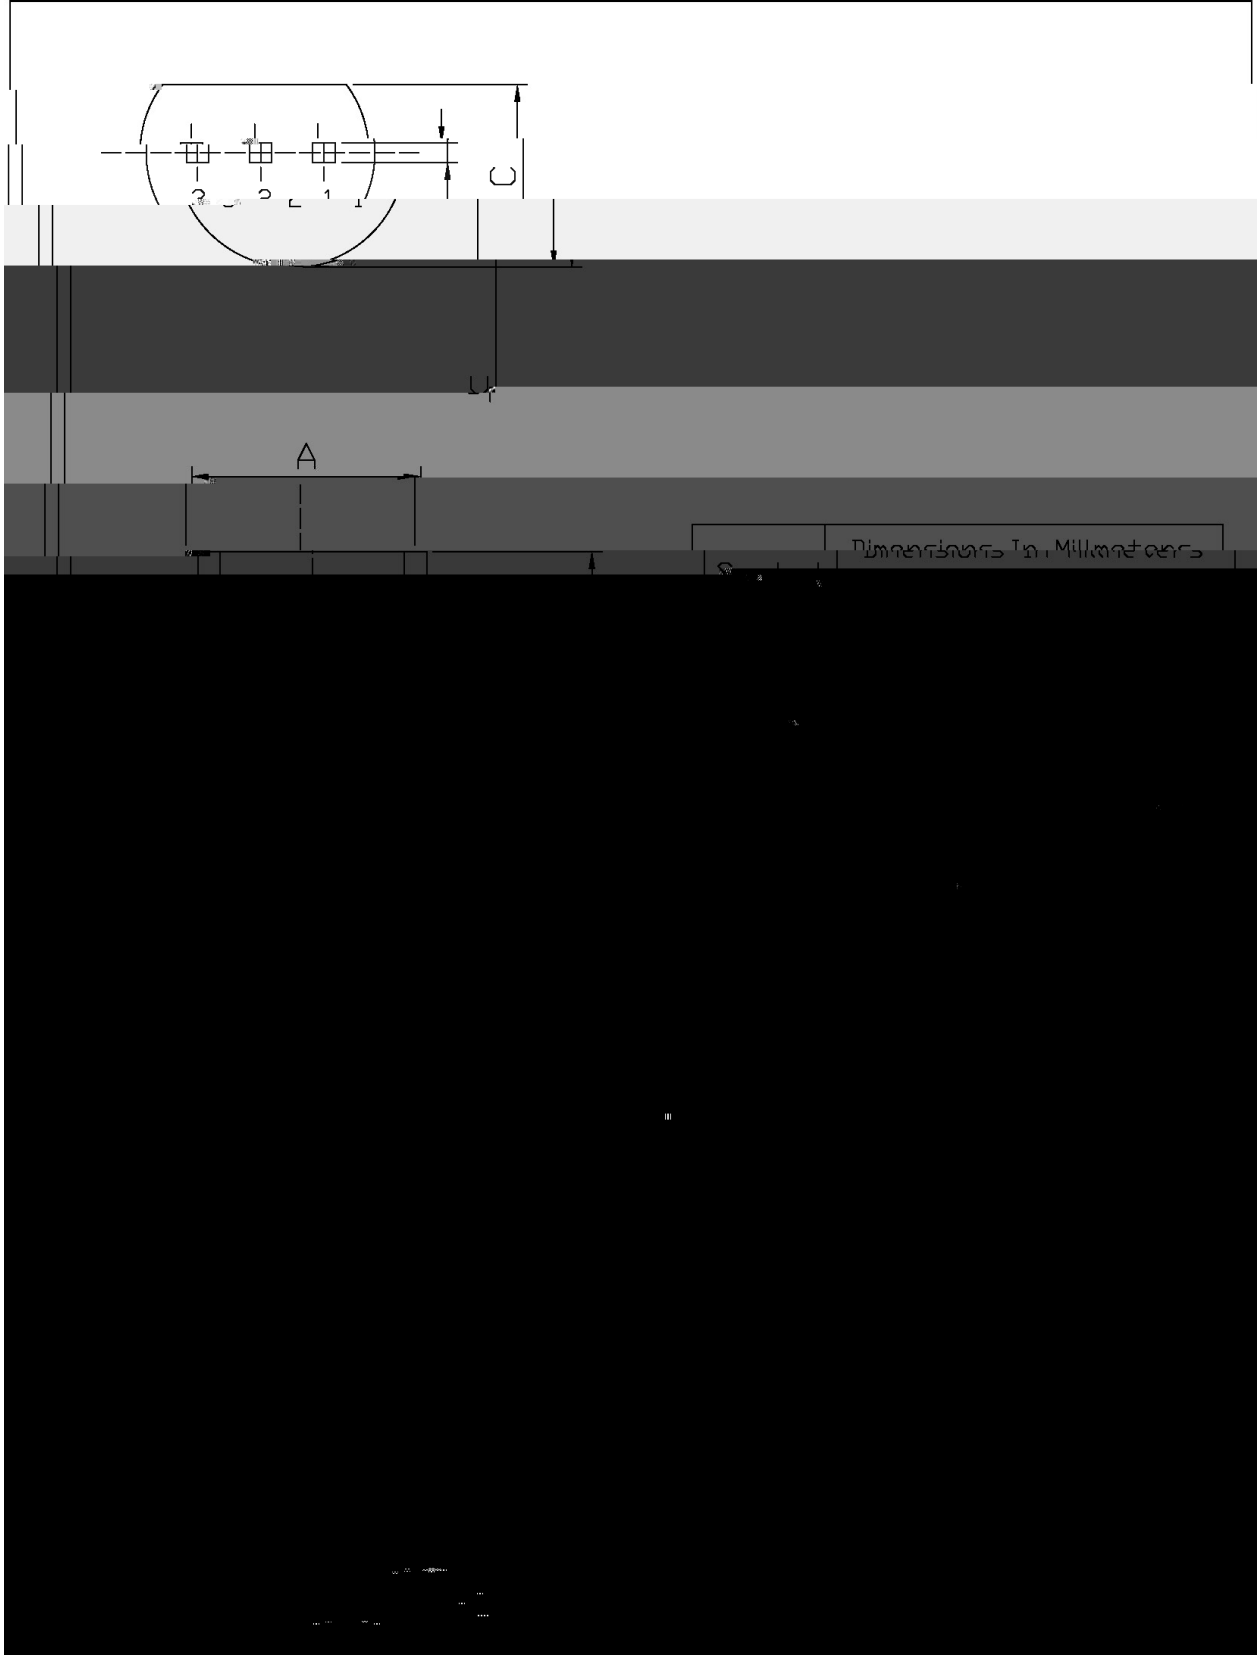

/ Marking Instructions

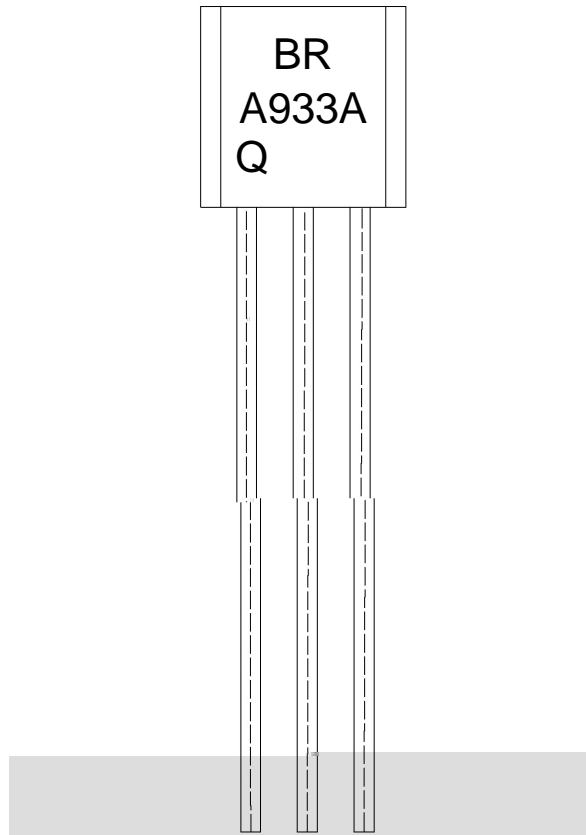

h_{FE}

Note:

BR: Company Code.

A933A: Product Type.

h_{FE} Classifications Symbol.

***: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)



- 1 25 150 60 90sec;
- 2 255 5 5 0.5sec;
- 3 2 10 /sec.

Note:

- 1.Preheating:25~150 , Time:60~90sec.
- 2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3. Cooling Speed: 2~10 /sec.

C.