

SOT-23


PNP

Silicon PNP transistor in a SOT-23 Plastic Package.

2SD2444K

Low $V_{CE(sat)}$, large current, complementary to 2SD2444K.

General power amplifier applications.



PIN 1

Base

PIN 2

Emitter



PIN 3


Collector

h_{FE} Classifications Symbol	Q
h_{FE} Range	120 270
Marking	HBKQ

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-15	V
Collector to Emitter Voltage	V_{CEO}	-15	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current	I_C	-1.0	A
Collector Current	I_{CM}	-3.0	A
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown						

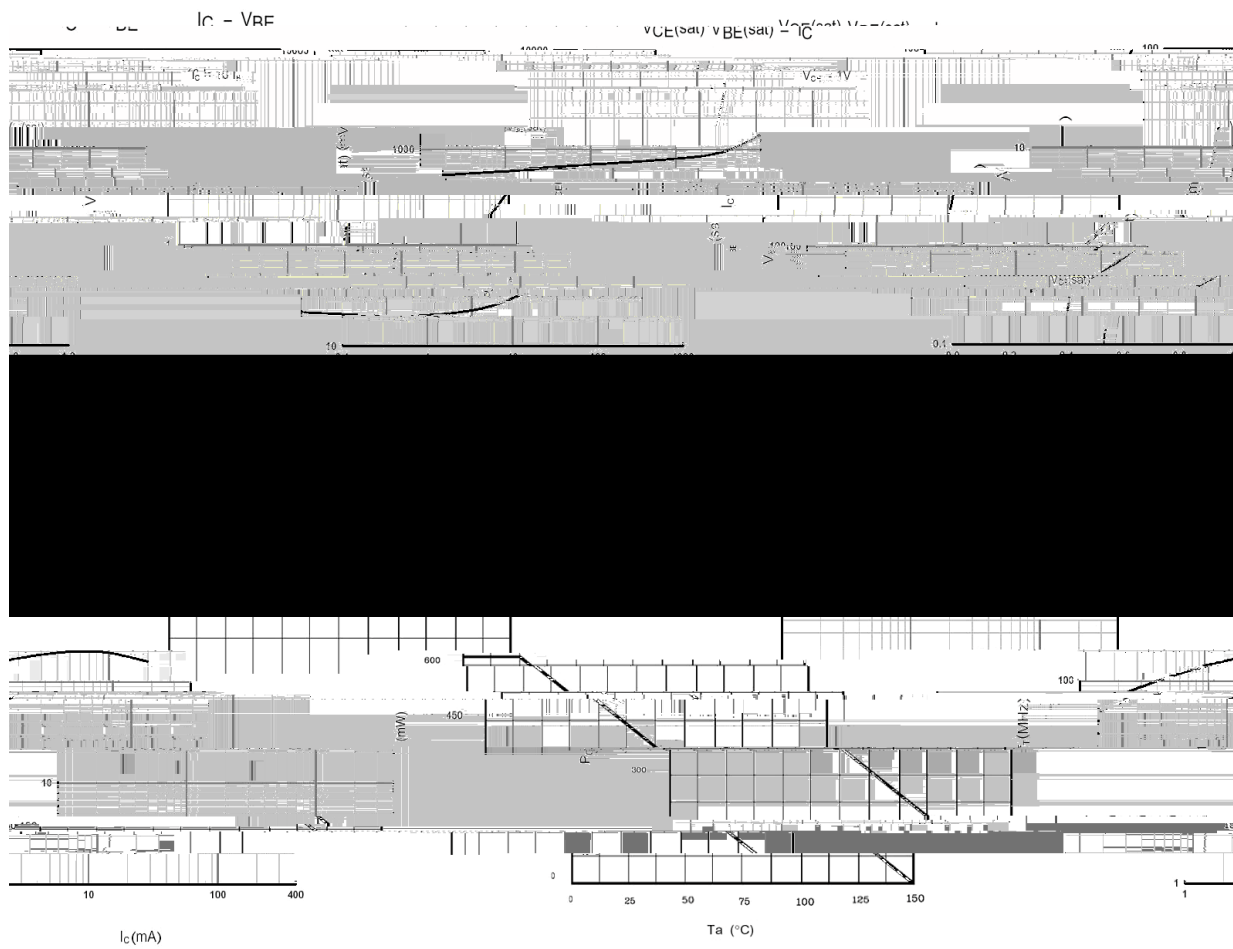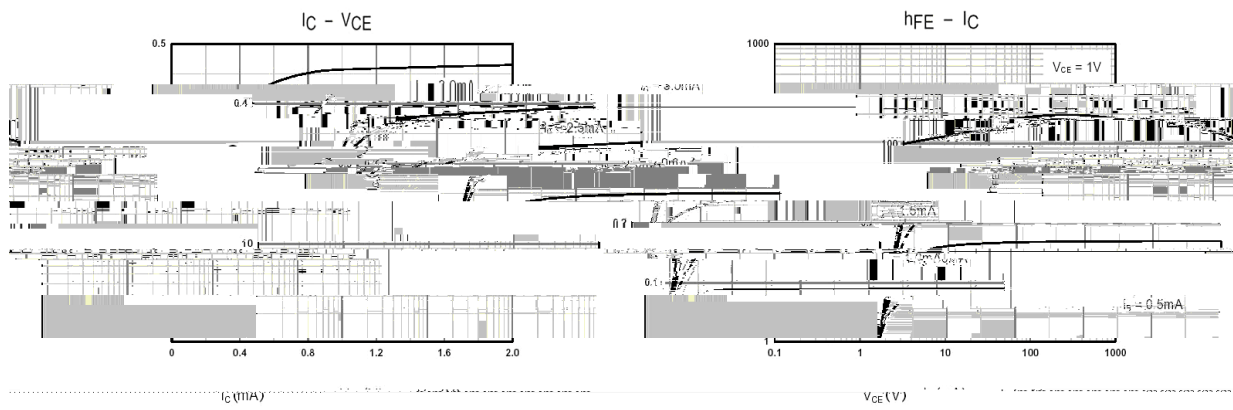

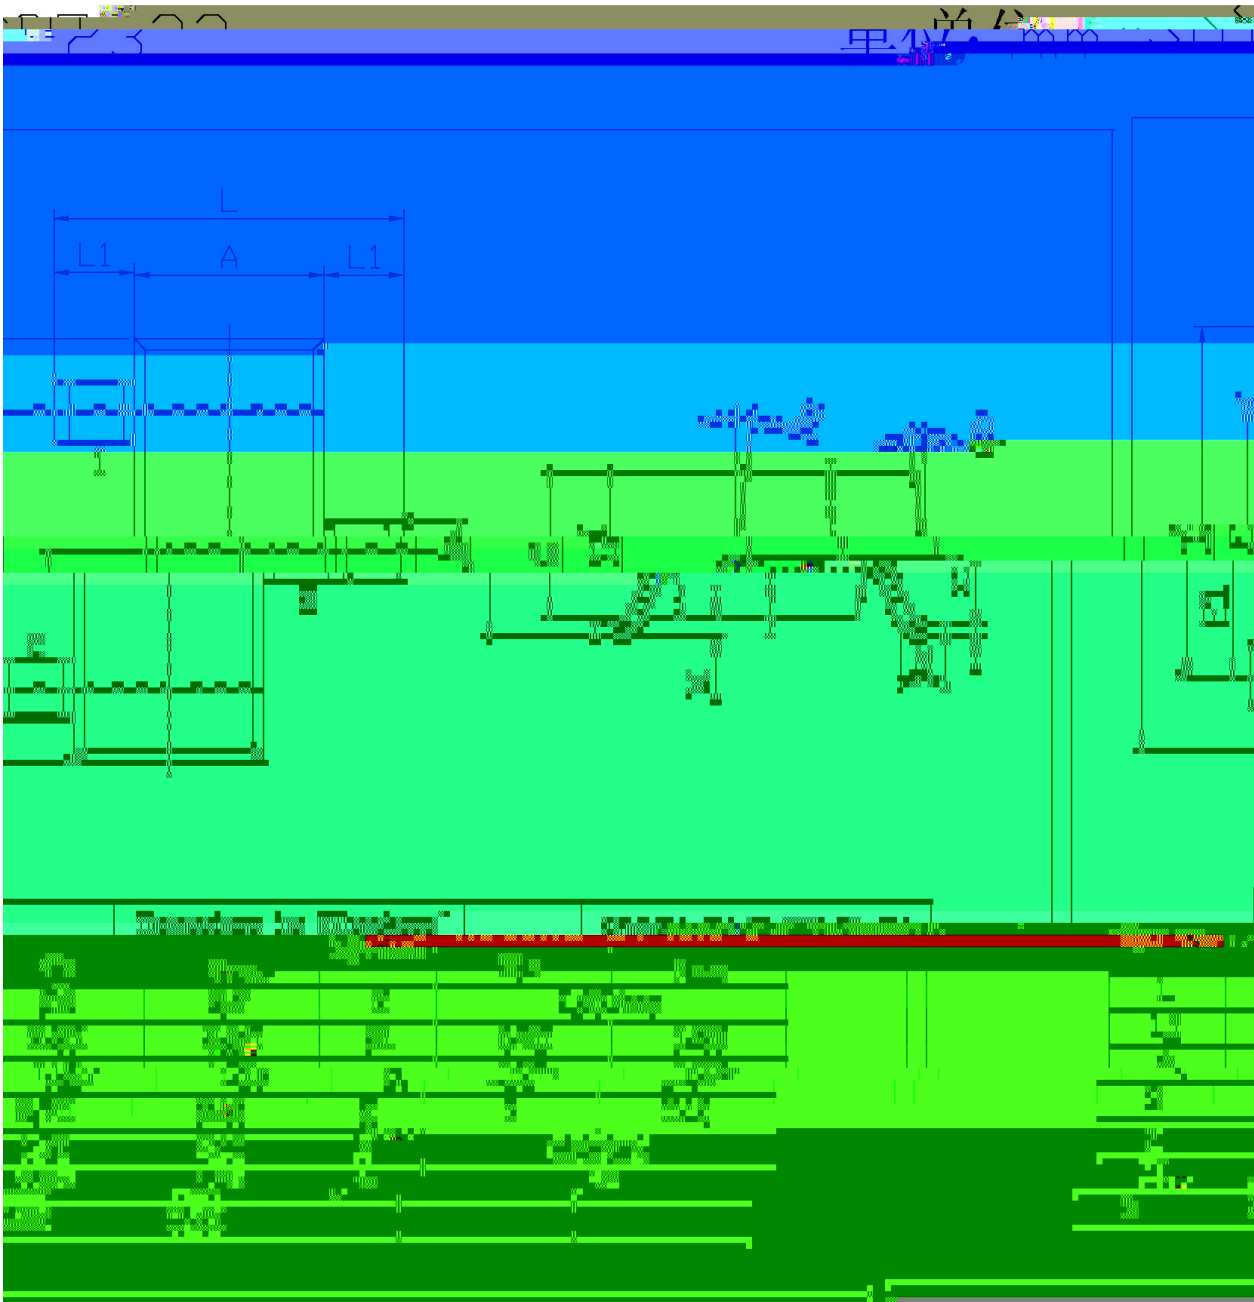



H

BK:

Q: h_{FE}


Note:

H Company Code

BK Product Type Code

Q: h_{FE} Classifications Symbol Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

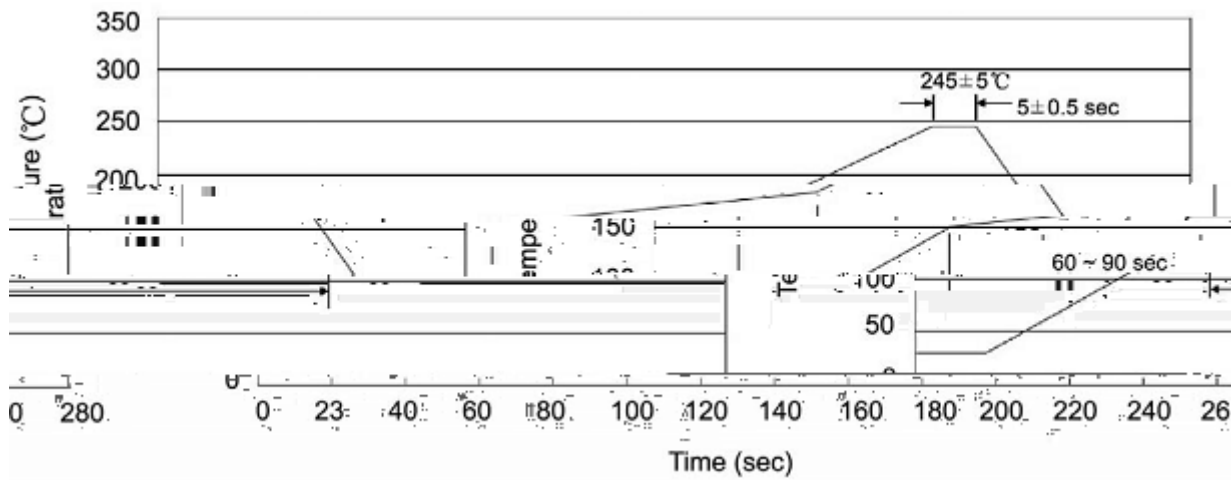

Note:

1 25 150 60