


2SB772N
Rev.E Mar.-2016


/ Electrical Characteristic Curve

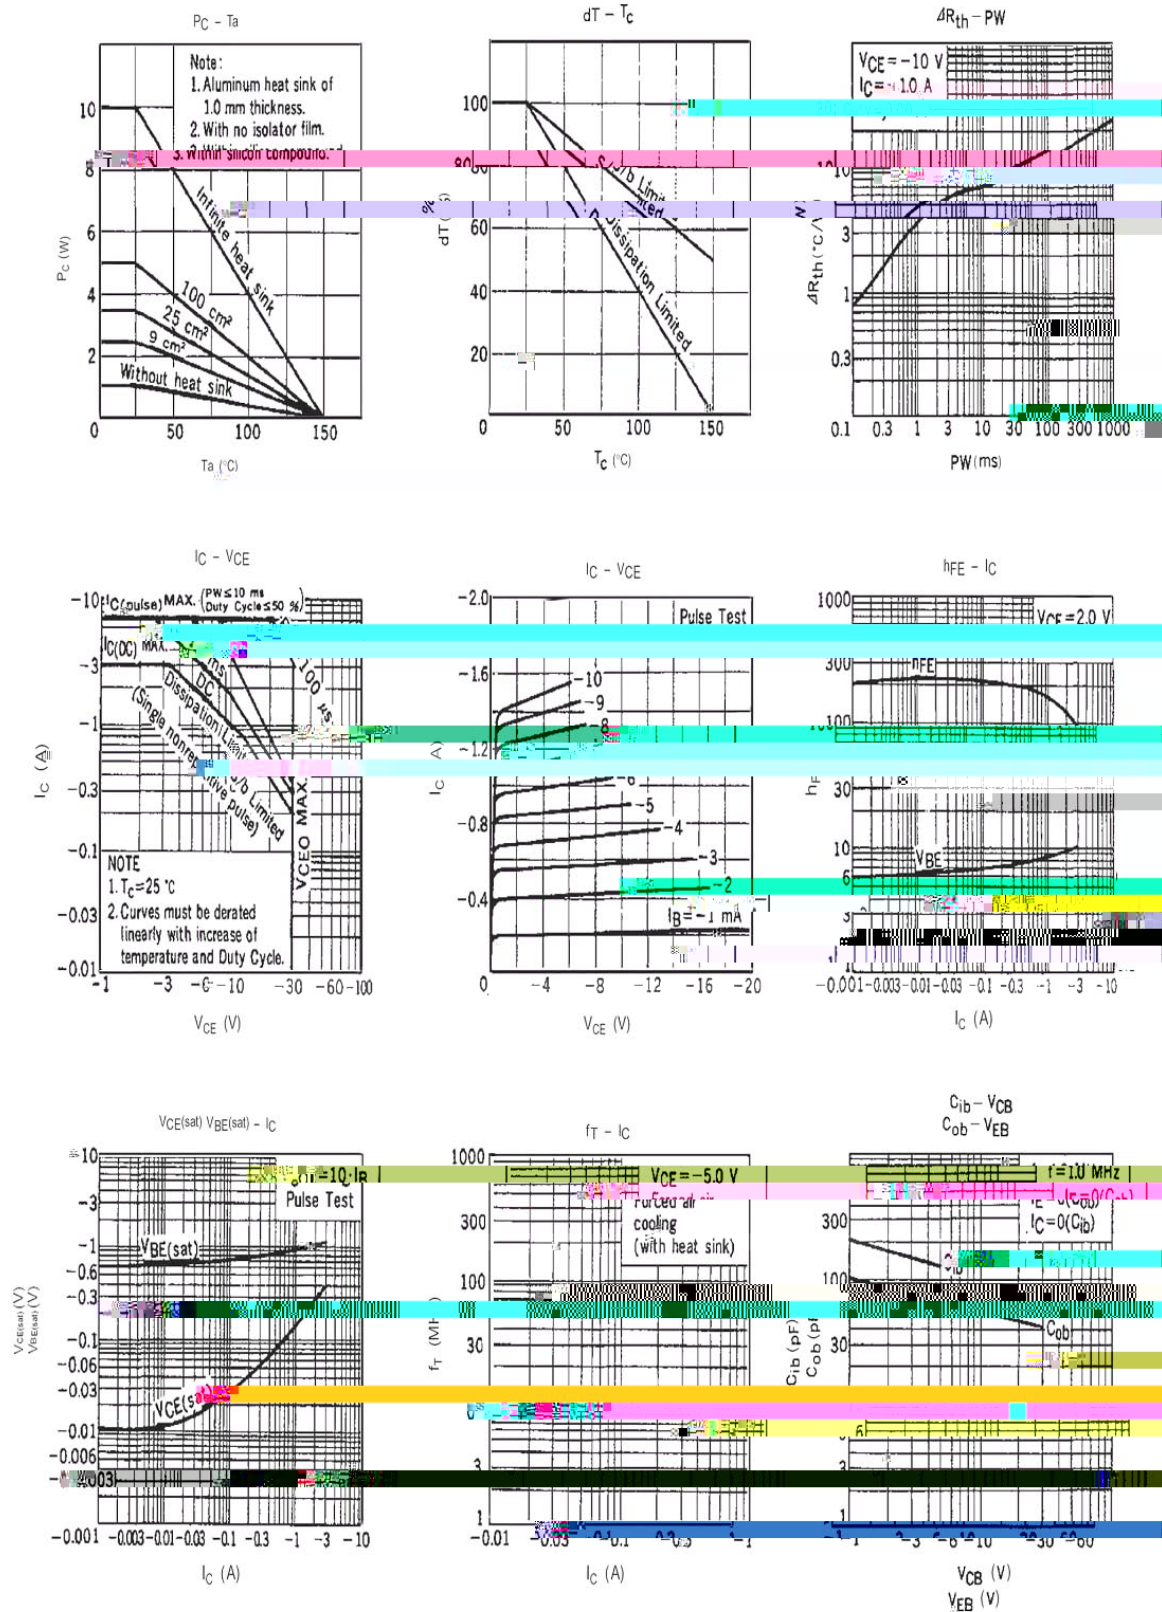


/ Package Dimensions

SOT-223

单位: mm

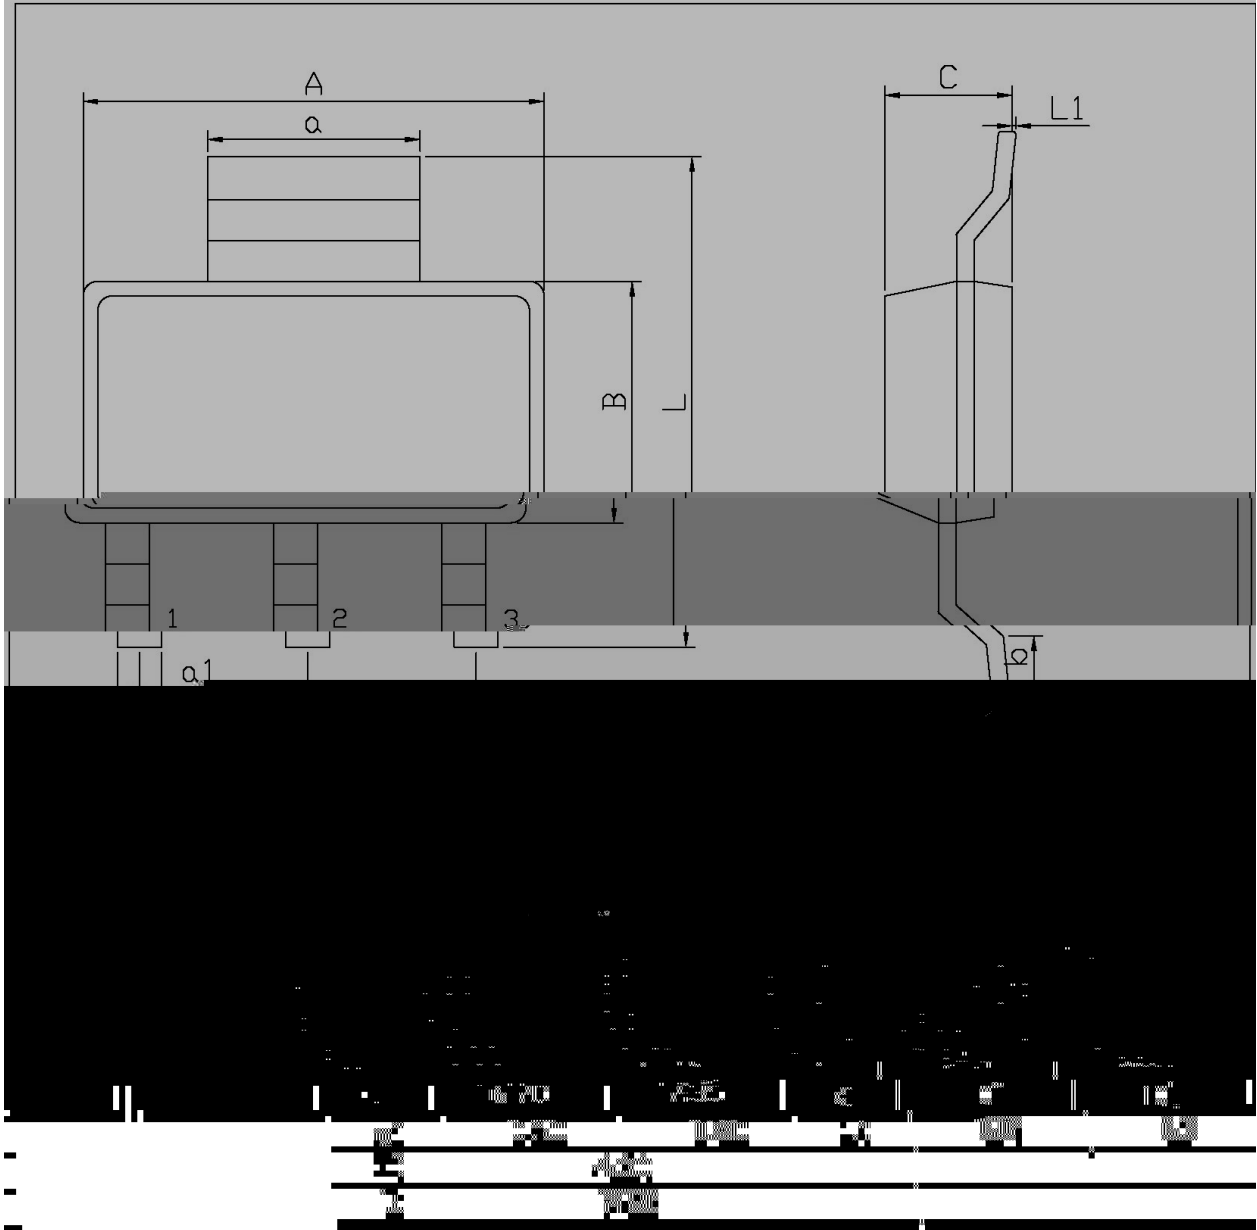

/ Marking Instructions

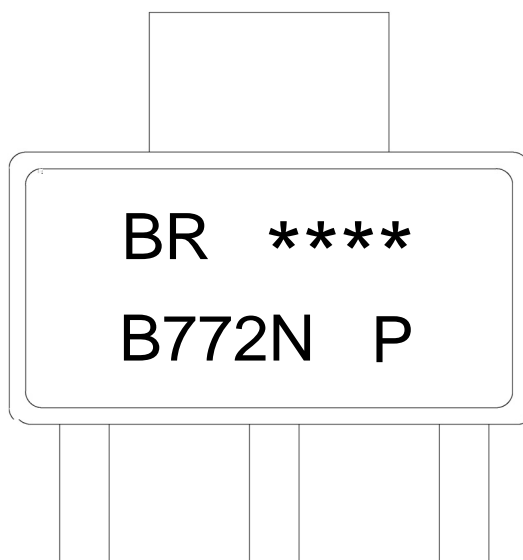

BR

B772N

P

h_{FE}

Note:


BR: Company Code.

B772N: Product Type.

P: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

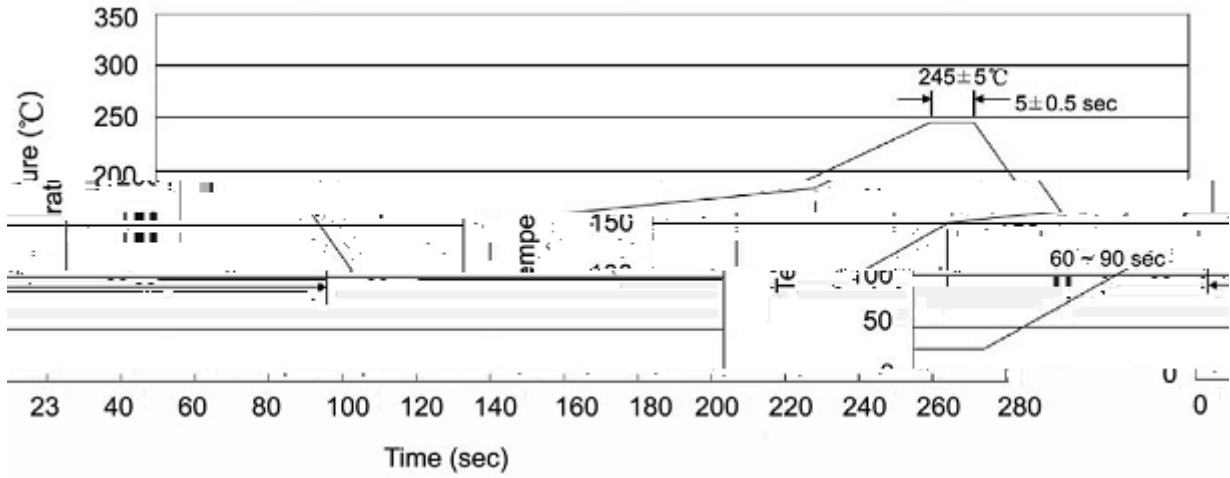

Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260 ± 5 10 ± 1 sec. Temp:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL