

2SC2230(A)

/ Descriptions

WR0<50 P QSQ


/ Features

Y_{FHR} /

/ Applications

/

/ Equivalent Circuit









/ Pinning



/ h_{FE} Classifications & Marking


/ Electrical Characteristic Curve

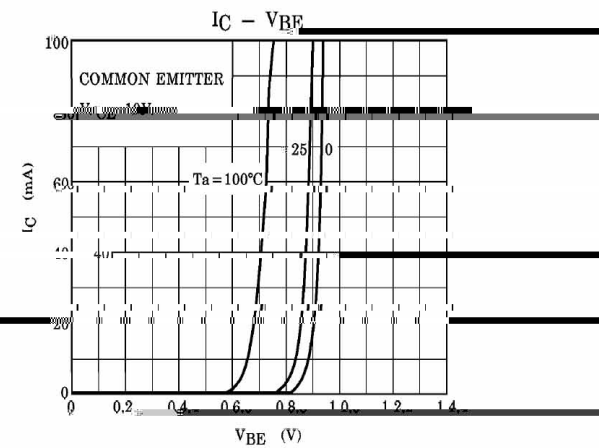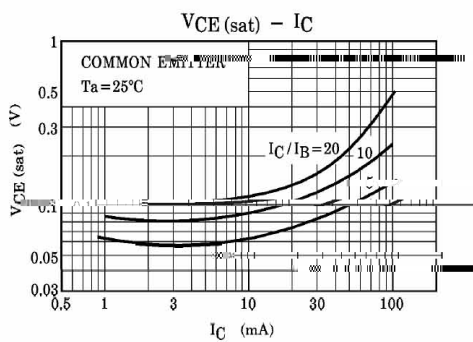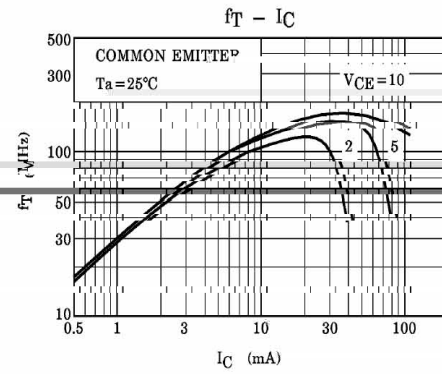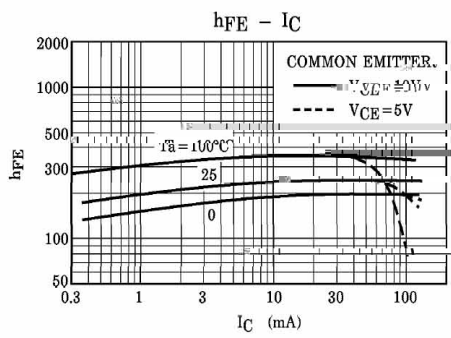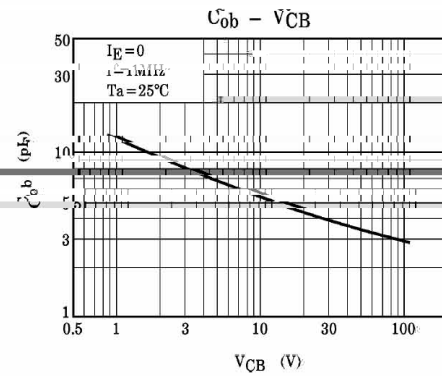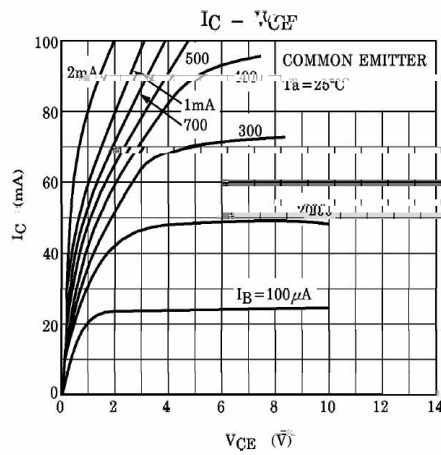


/ Package Dimensions

TO-92LM

Unit: mm

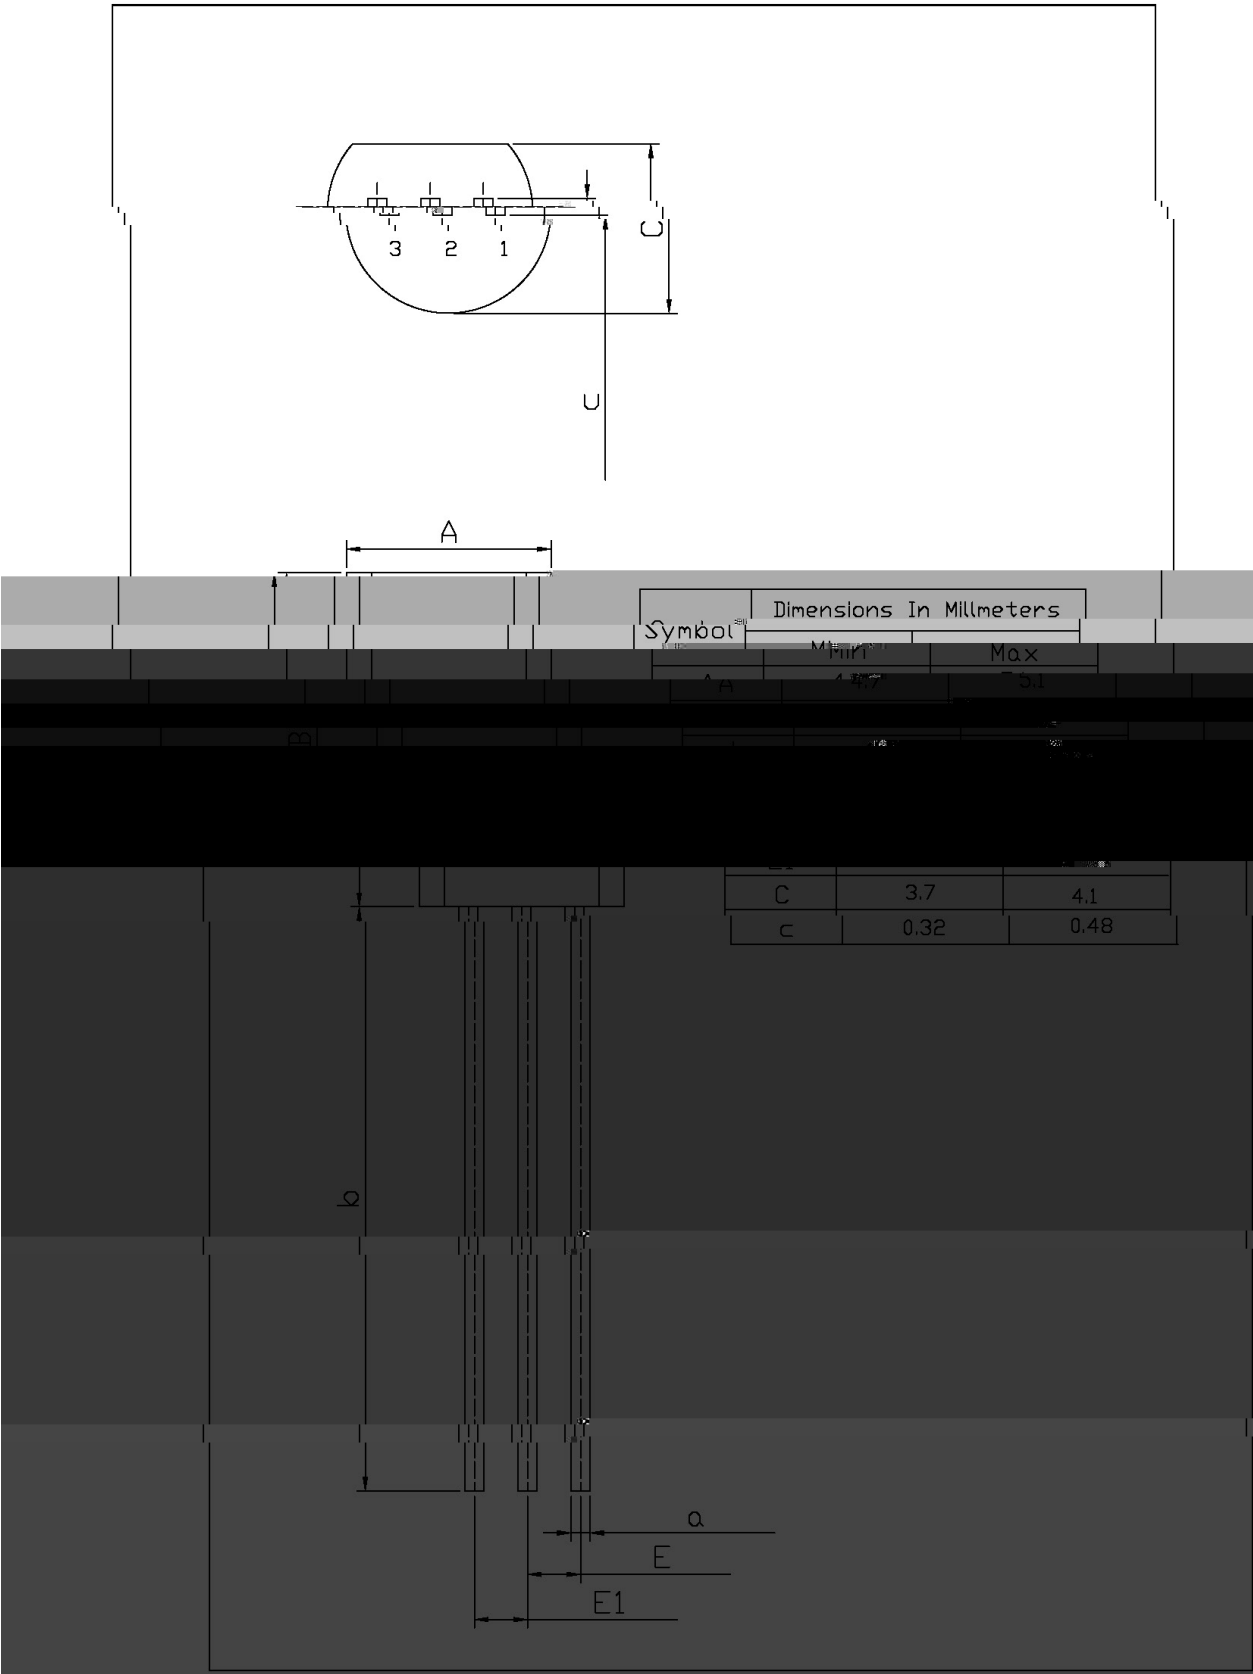


/ Marking Instructions

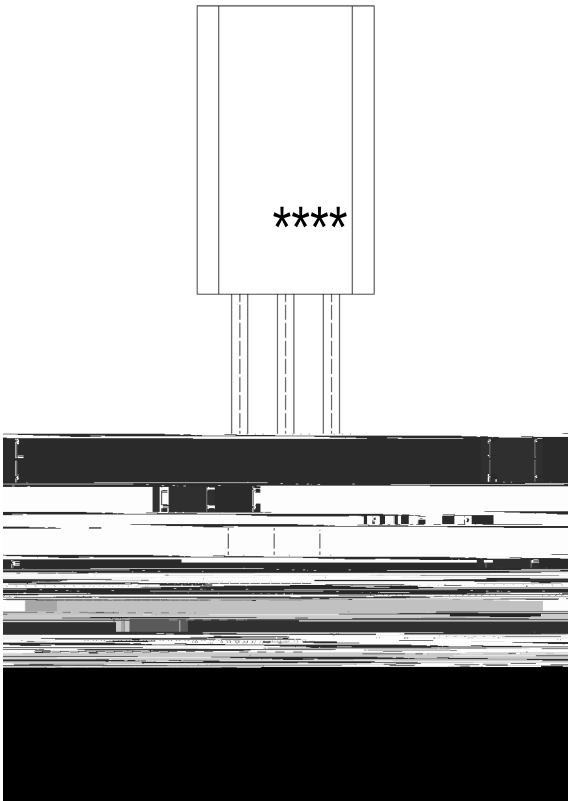

EU:-
F5563D
\\= k_{IH}

() / Temperature Profile for Dip Soldering(Pb-Free)

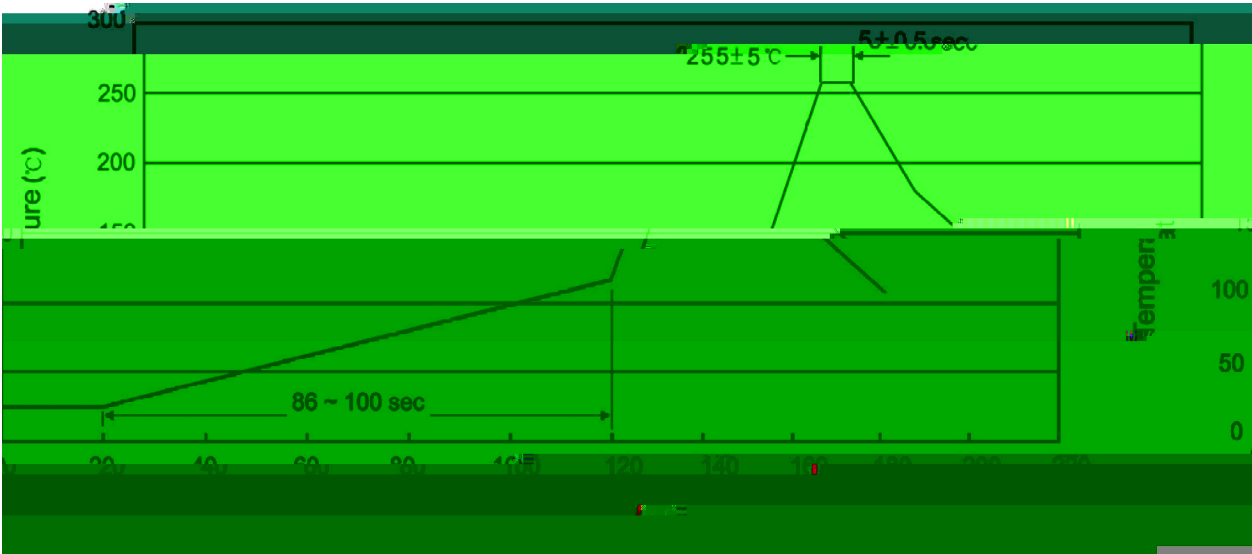

/ Resistance to Soldering Heat Test Conditions



/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195