

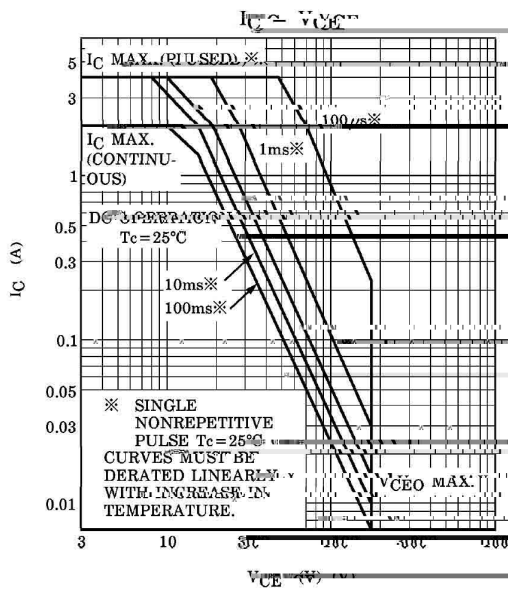
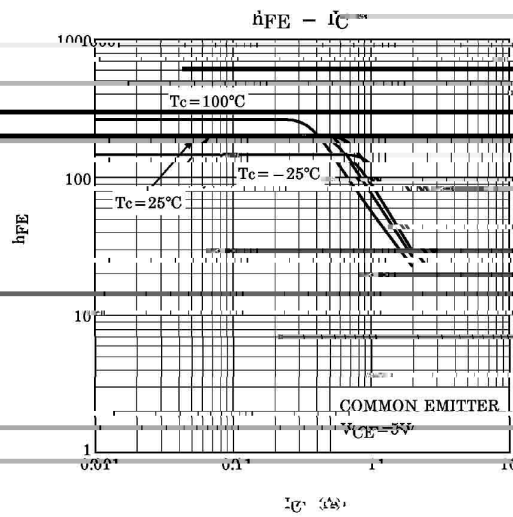
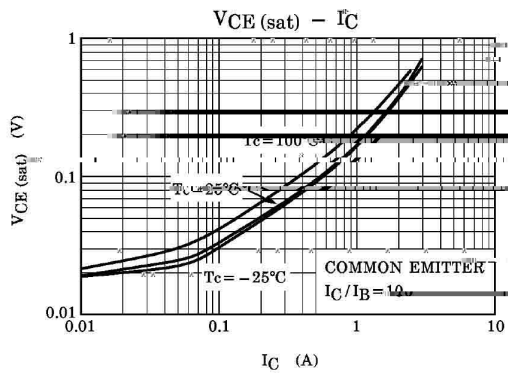
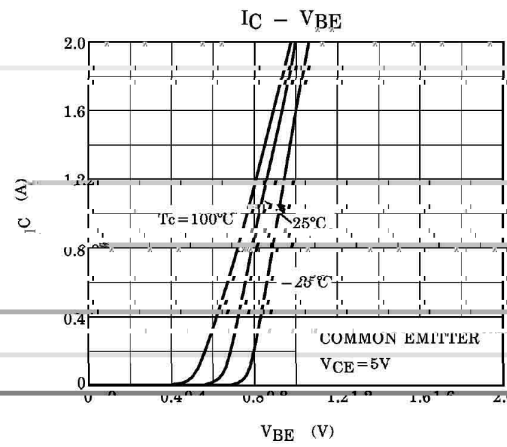


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	180	V
Collector to Emitter Voltage	V_{CEO}	180	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	2.0	A
Base Current – Continuous	I_B	1.0	A
Collector Power Dissipation	P_C	1.5	W
Collector Power Dissipation Junction Temperature	$P_C(T_c=25^\circ C)$ T_j	20	W


/ Electrical Characteristic Curve

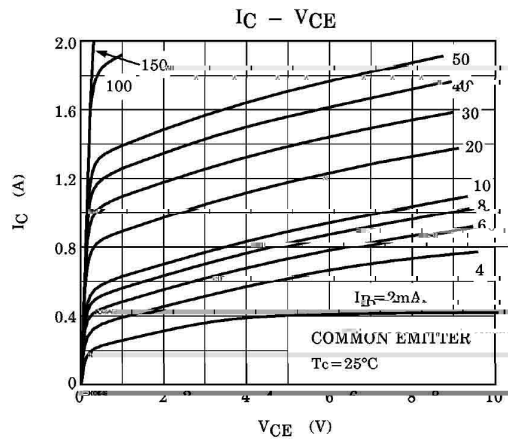

/ Package Dimensions

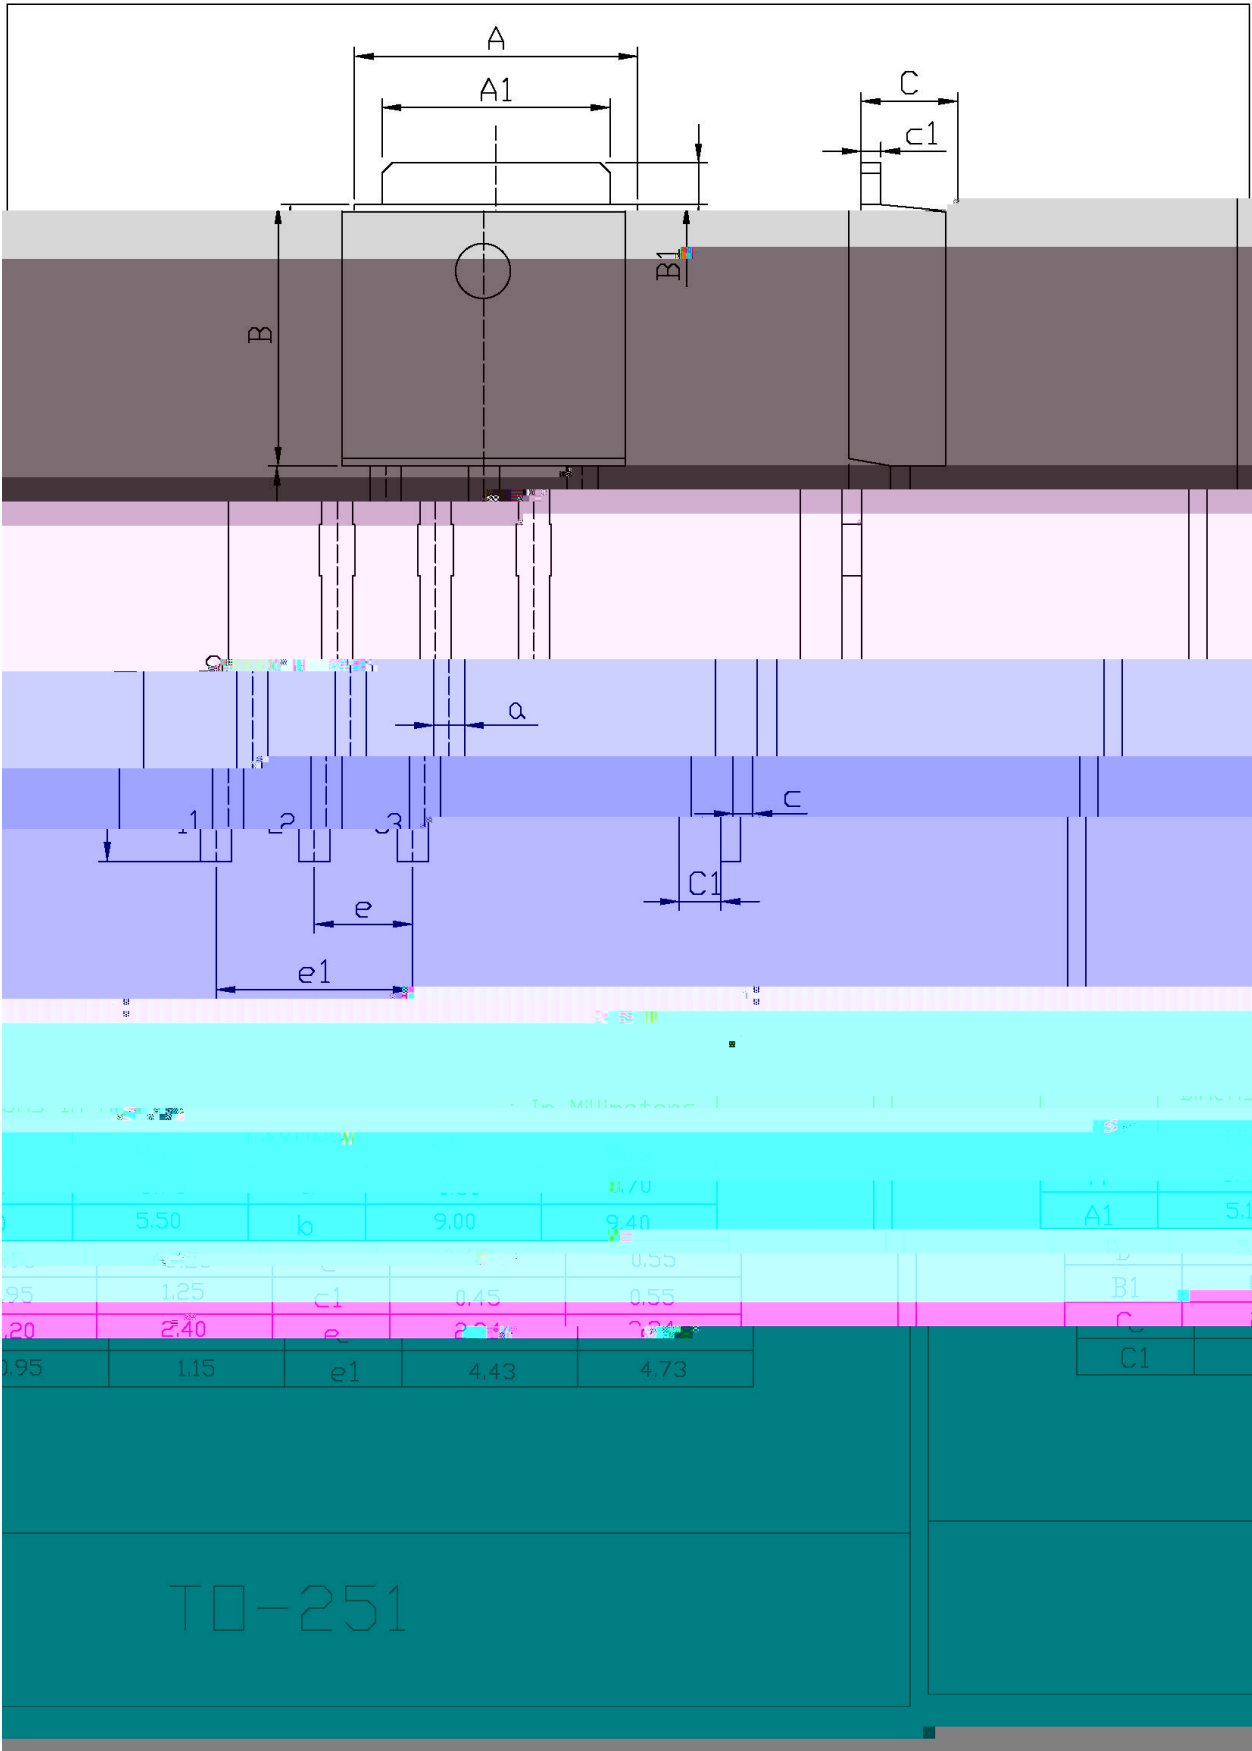

/ Marking Instructions

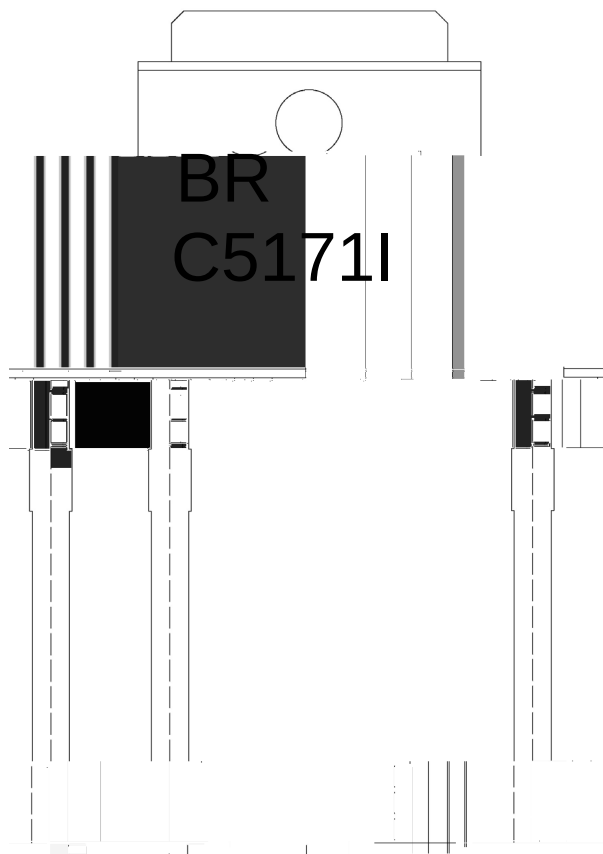

BR

C5171I


Note:

BR: Company Code

C5171I: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

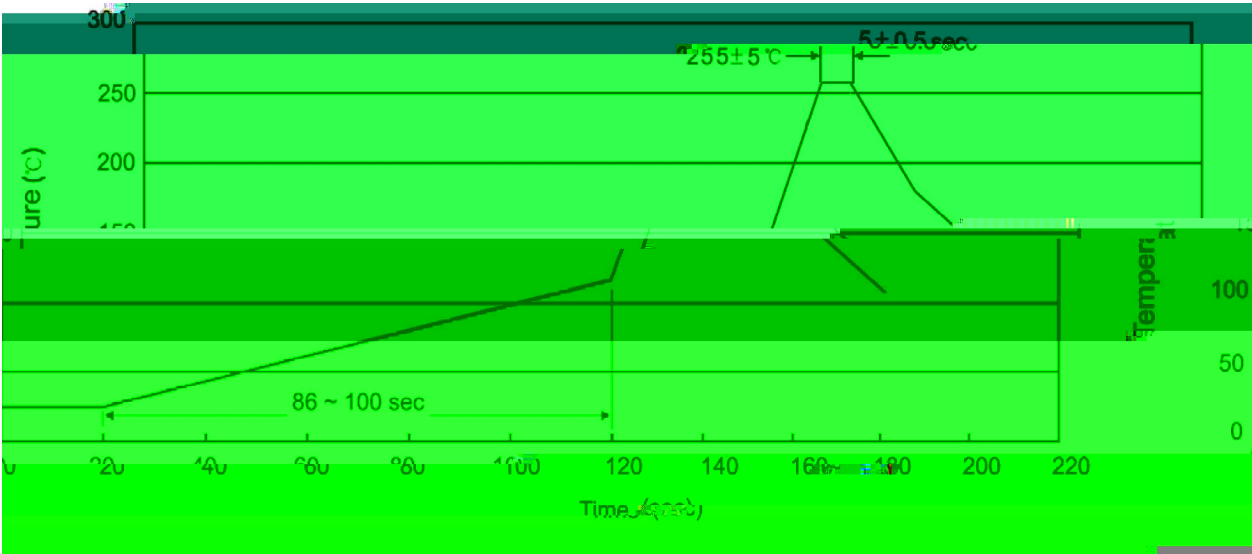

Note:

- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- 1.Preheating:25~150

, Time:60~90sec.
- 2.Peak Temp.:255±5

, Duration:5±0.5sec.
3. Cooling Speed: 2~10

/sec.

/ Resistance to Soldering Heat Test Conditions

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm ³)

/ TUBE