



Silicon PNP transistor in a TO-220F Plastic Package.

High transition frequency, complementary to 3DA4793.

Power amplifier, driver stage amplifier applications.









PIN1 Base      PIN 2 Collector      PIN 3 Emitter

See Marking Instructions.


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	-230	V
Collector to Emitter Voltage	$V_{CEO}$	-230	V
Emitter to Base Voltage	$V_{EBO}$	-5.0	V
Collector Current - Continuous	$I_C$	-1.0	A
Base Current	$I_B$	-0.1	A
Collector Power Dissipation	$P_C$	2.0	W
	$P_{C(T_C=25)}$	20	W
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	


Parameter	Symbol	Test Conditions	Min
-----------	--------	-----------------	-----

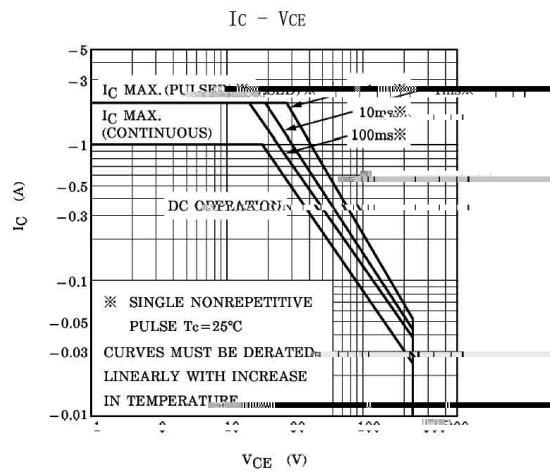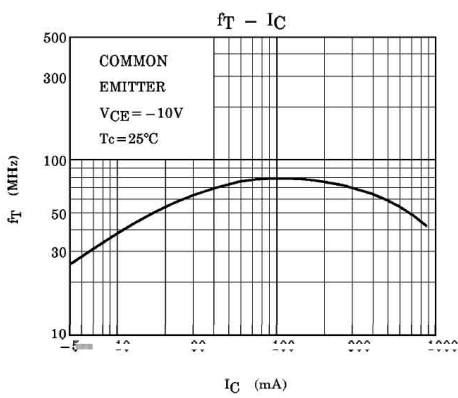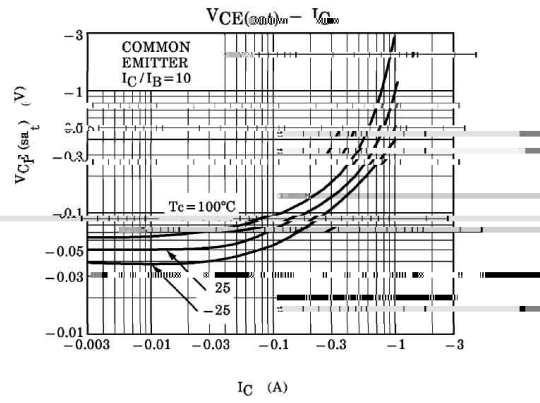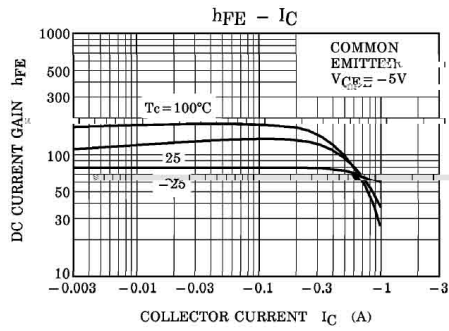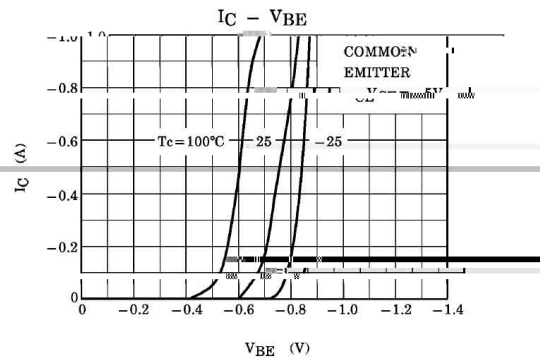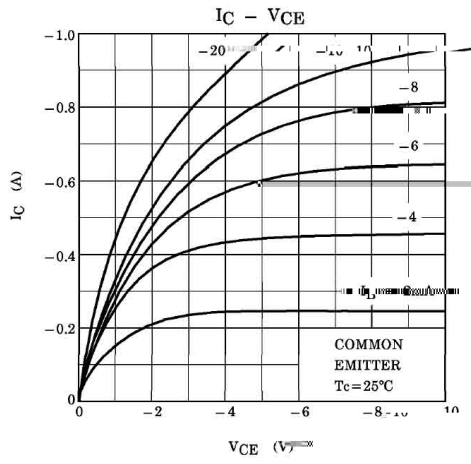

TO-220F

单位: mm

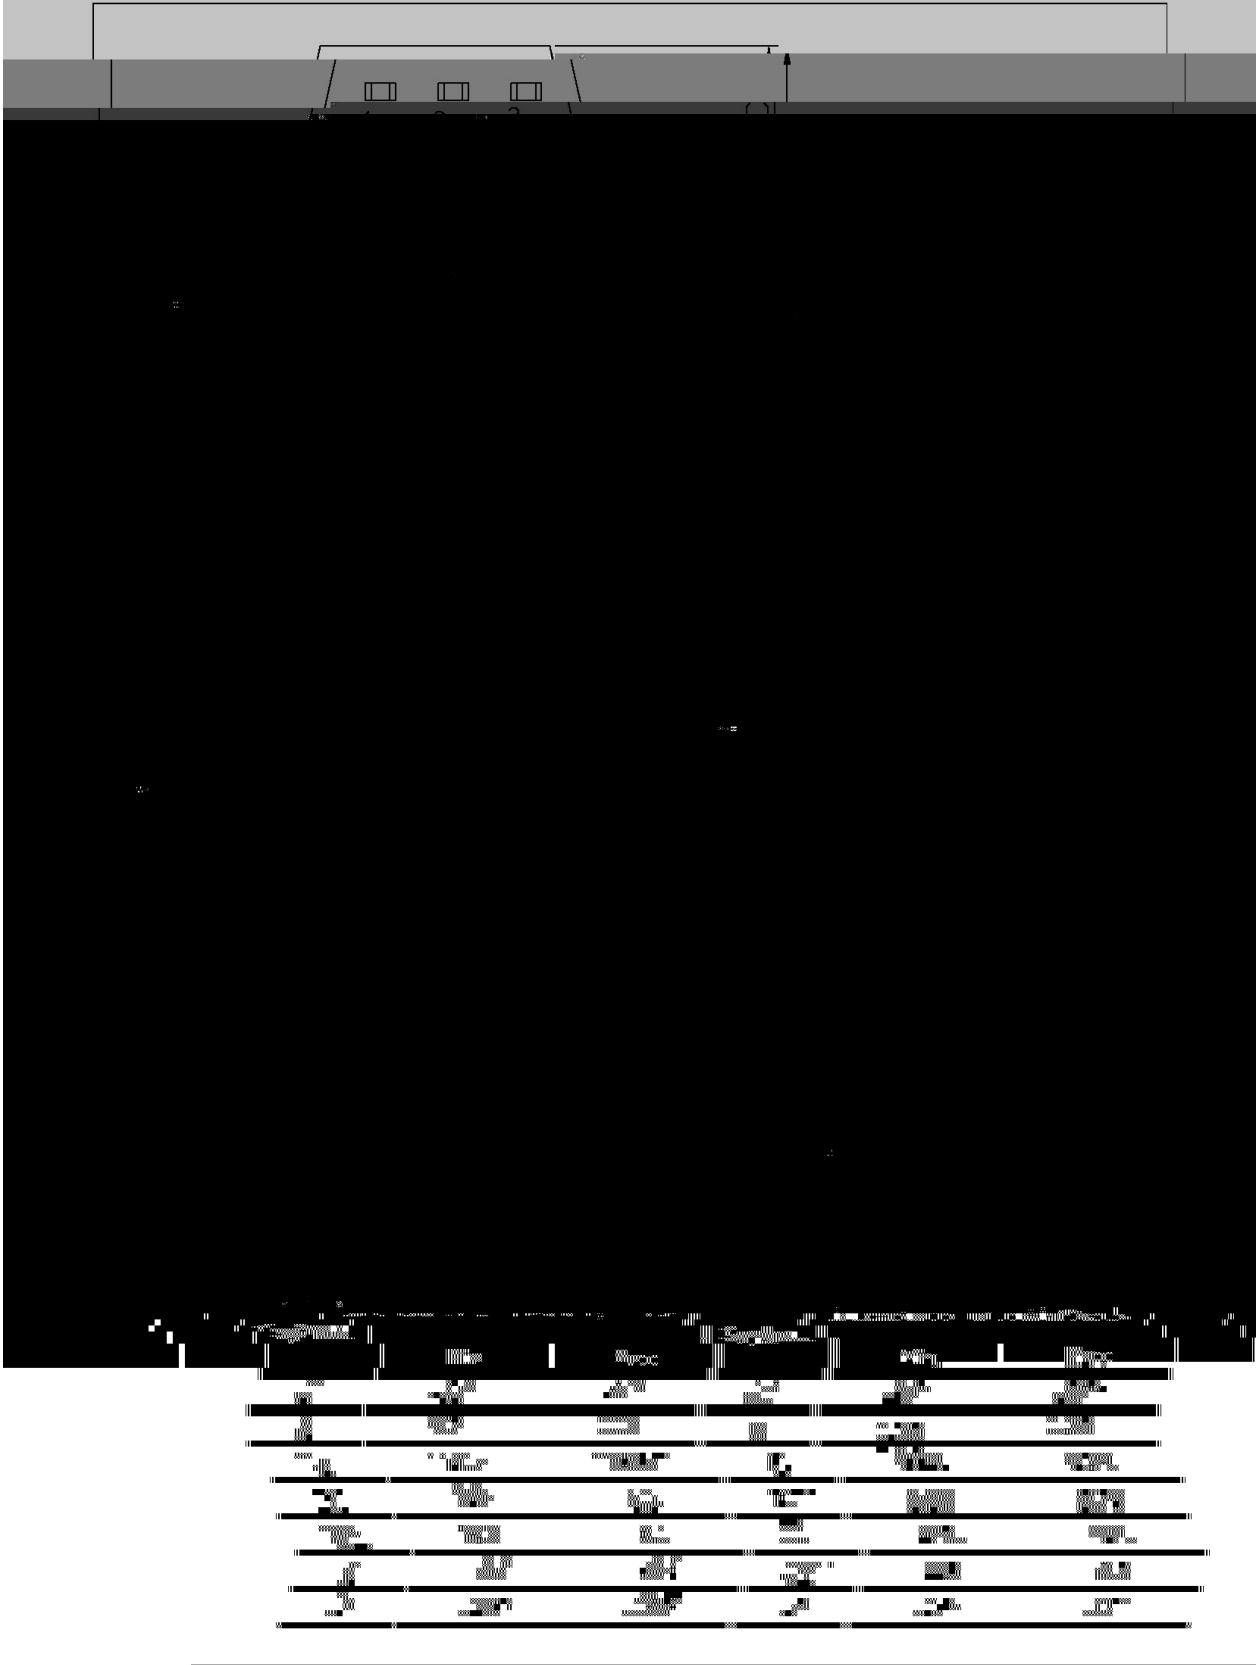

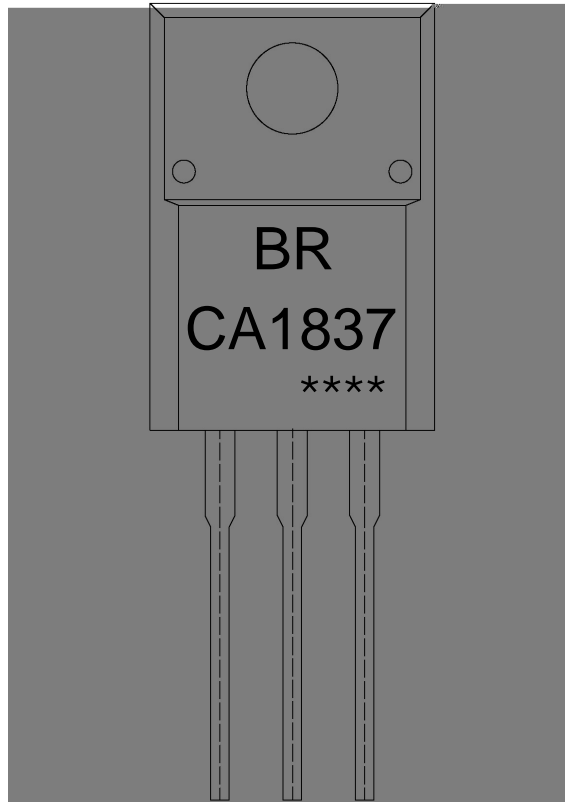

BR

Note:

BR: Company Code.

CA1837: Product Type.

\*\*\*\*: Lot No. Code, code change with Lot No.

