

/ Descriptions

TO-252 Voltage Regulator in a TO-252 Plastic Package.

/ Features

1.0A,
3-Terminal regulators ,output current up to 1.0A, internal thermal overload protection and short-circuit limiting, HF Product.


/ Applications

Voltage Regulator.

/ Equivalent Circuit or Application Circuit



/ Pinning

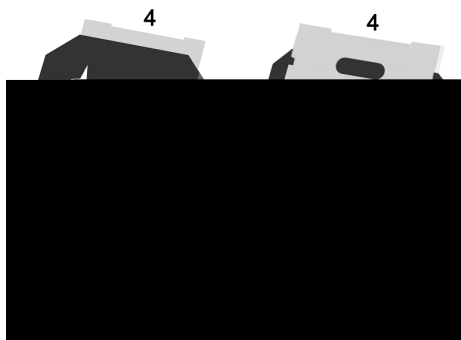

PIN1 IN PIN 2 4 GND PIN 3 OUT

/ Marking


See Marking Instructions.

Parameter	Symbol	Rating	Unit
Input voltage	V_I	7~35	V
Power Dissipation	P_D	Internally Limited	W
Thermal Resistance Junction-ambient	$R_{\theta JA}$	105	/W
Thermal Resistance Junction-case	$R_{\theta JC}$	10	/W
Operating Temperature Range	T_{OPR}	-40 125	
Storage temperature range	T_{stg}	-65 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

Output Voltage


/ Electrical Characteristic Curve

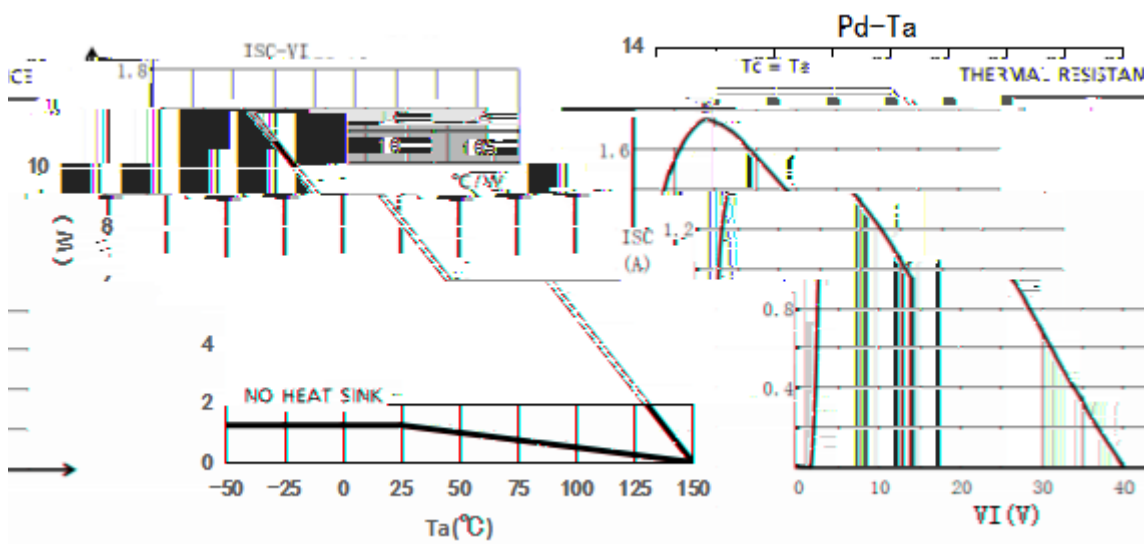



/ Package Dimensions

/ Marking Instructions

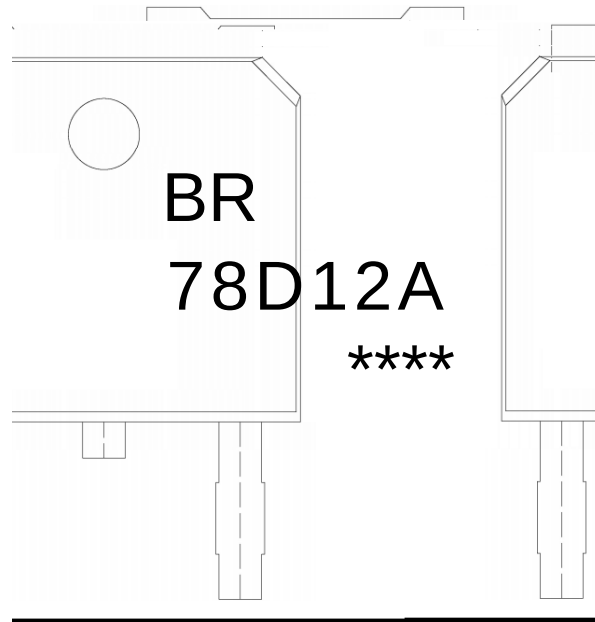

Note:

BR: Company Code

78D12A: Product Type

****: Lot No. Code, code change with Lot No

/ Notices

PCB