
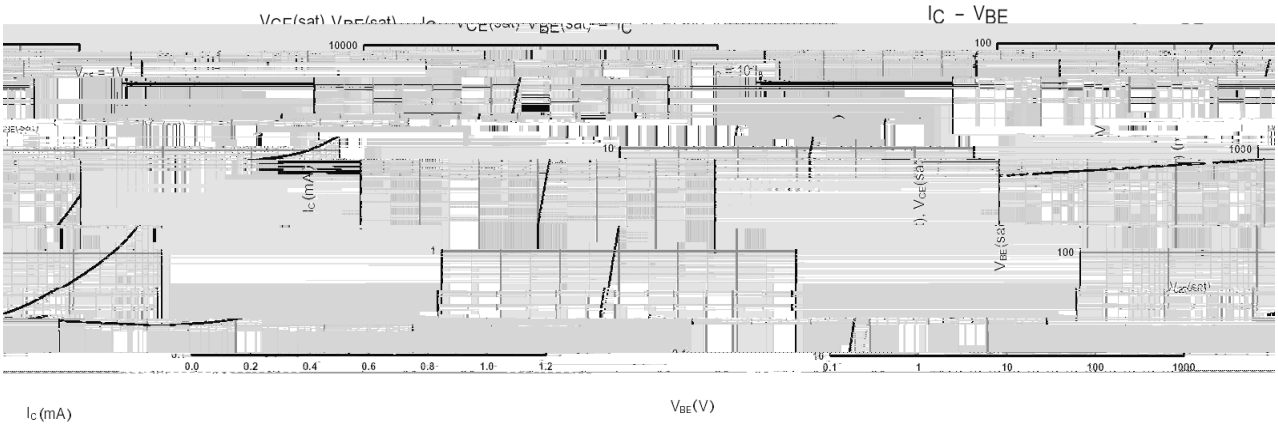


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-25	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current	I_C	-1.5	A
Base Current	I_B	-0.5	A


/ Electrical Characteristic Curve

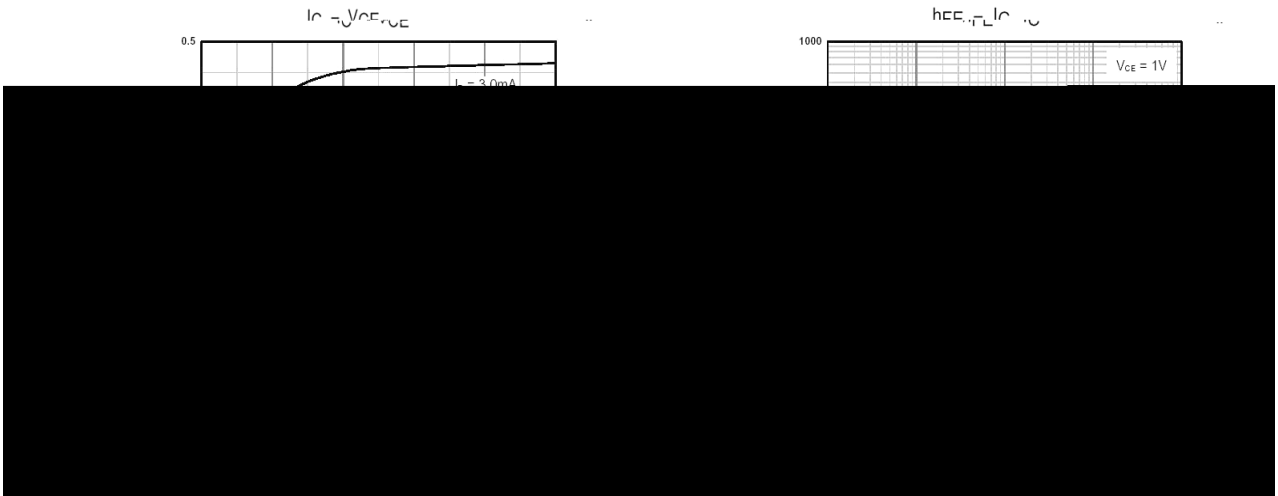


/ Package Dimensions

8550M-23

单位: mm

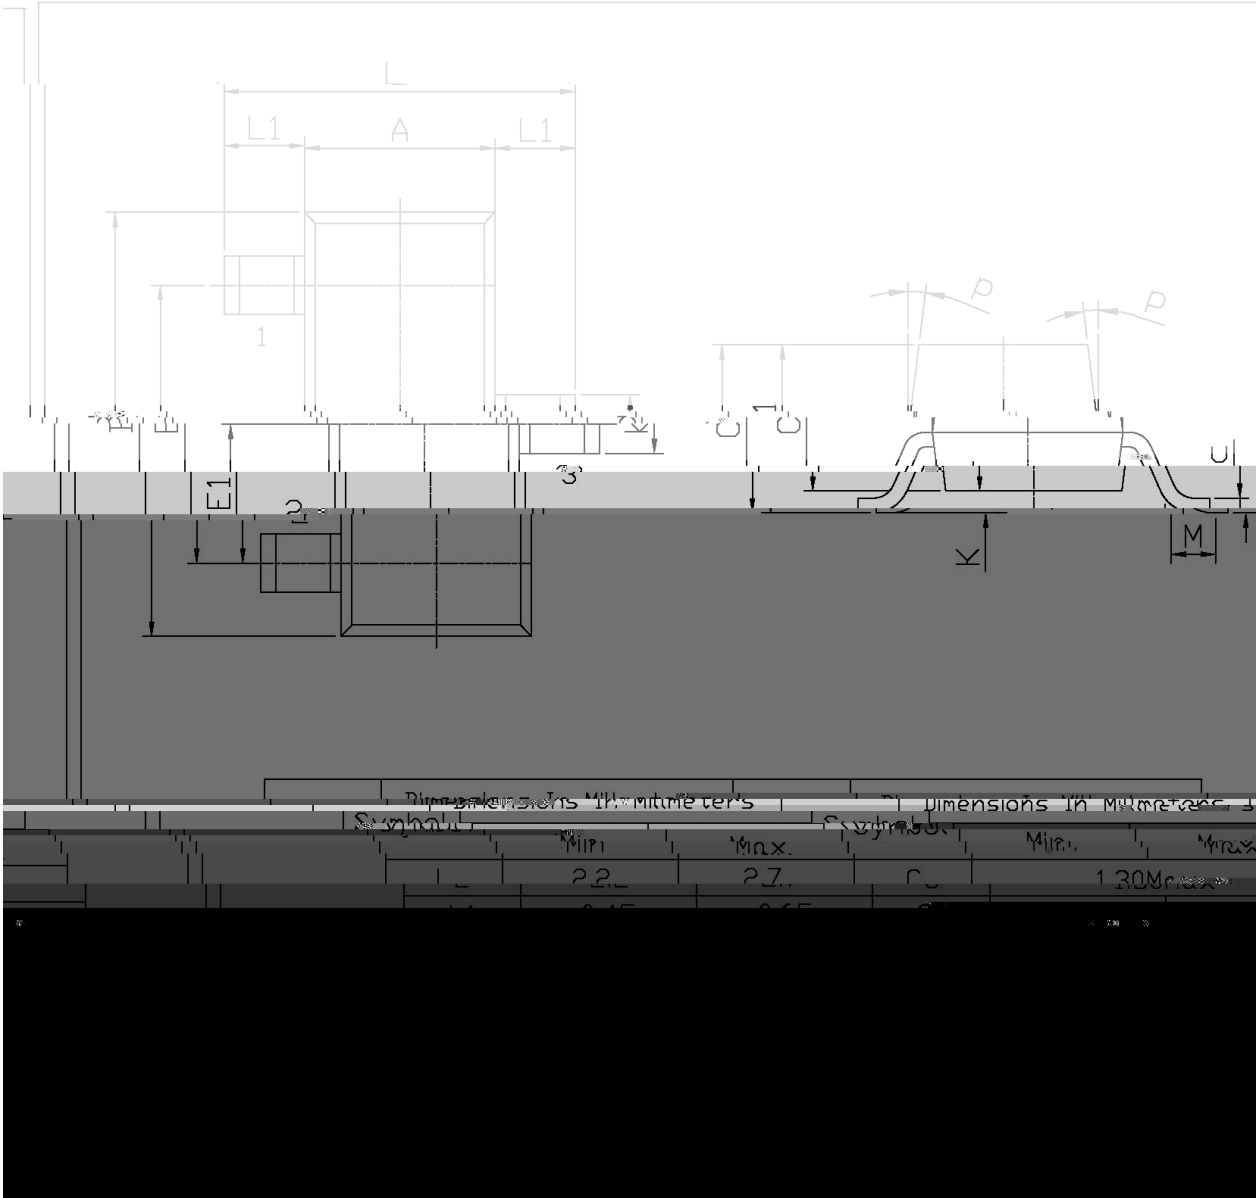

/ Marking Instructions

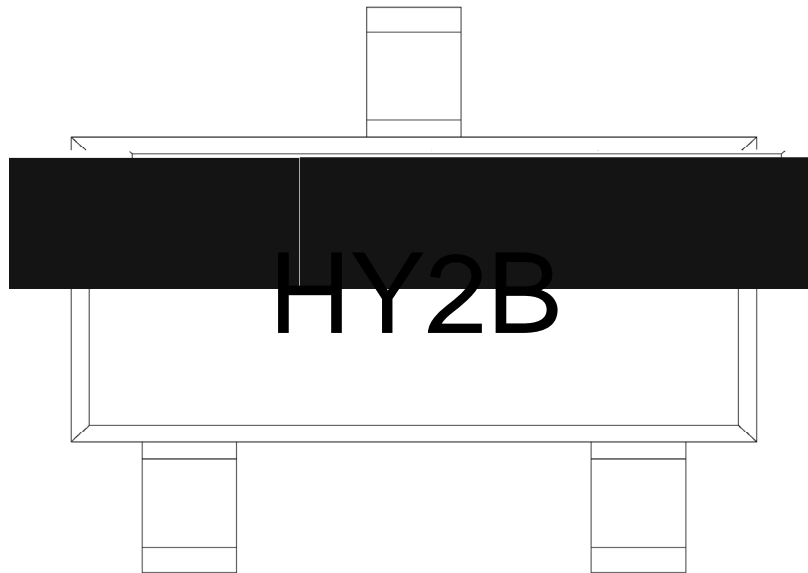

H

Y2

B h_{FE}

Note:

H Company Code

Y2 Product Type Code

B h_{FE} Classifications Symbol Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

60 ~ 90sec;
 5± 0.5sec;
 /sec.

- 1.Preheating:150~180℃ , Time:60~90sec.
- 2.Peak Temp.:245± 5℃ , Duration:5± 0.5sec.
3. Cooling Speed: 2~10℃/sec.