

/ Descriptions

TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.


/ Features

P_C , h_{FE} , 9014
High P_C , excellent h_{FE} linearity, complementary pair with 9014.

/ Applications

Low frequency, low noise amplifier.

/ Equivalent Circuit



/ Pinning



1 2 3
PIN1 Collector PIN 2 Base PIN 3 Emitter

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	A	B	C	D
h_{FE} Range	60~150	100~300	200~600	400~1000

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-45	V
Emitter to Base Voltage	V		

CBO


CBO

/ Electrical Characteristic Curve


/ Package Dimensions

T0-92

Unit: mm

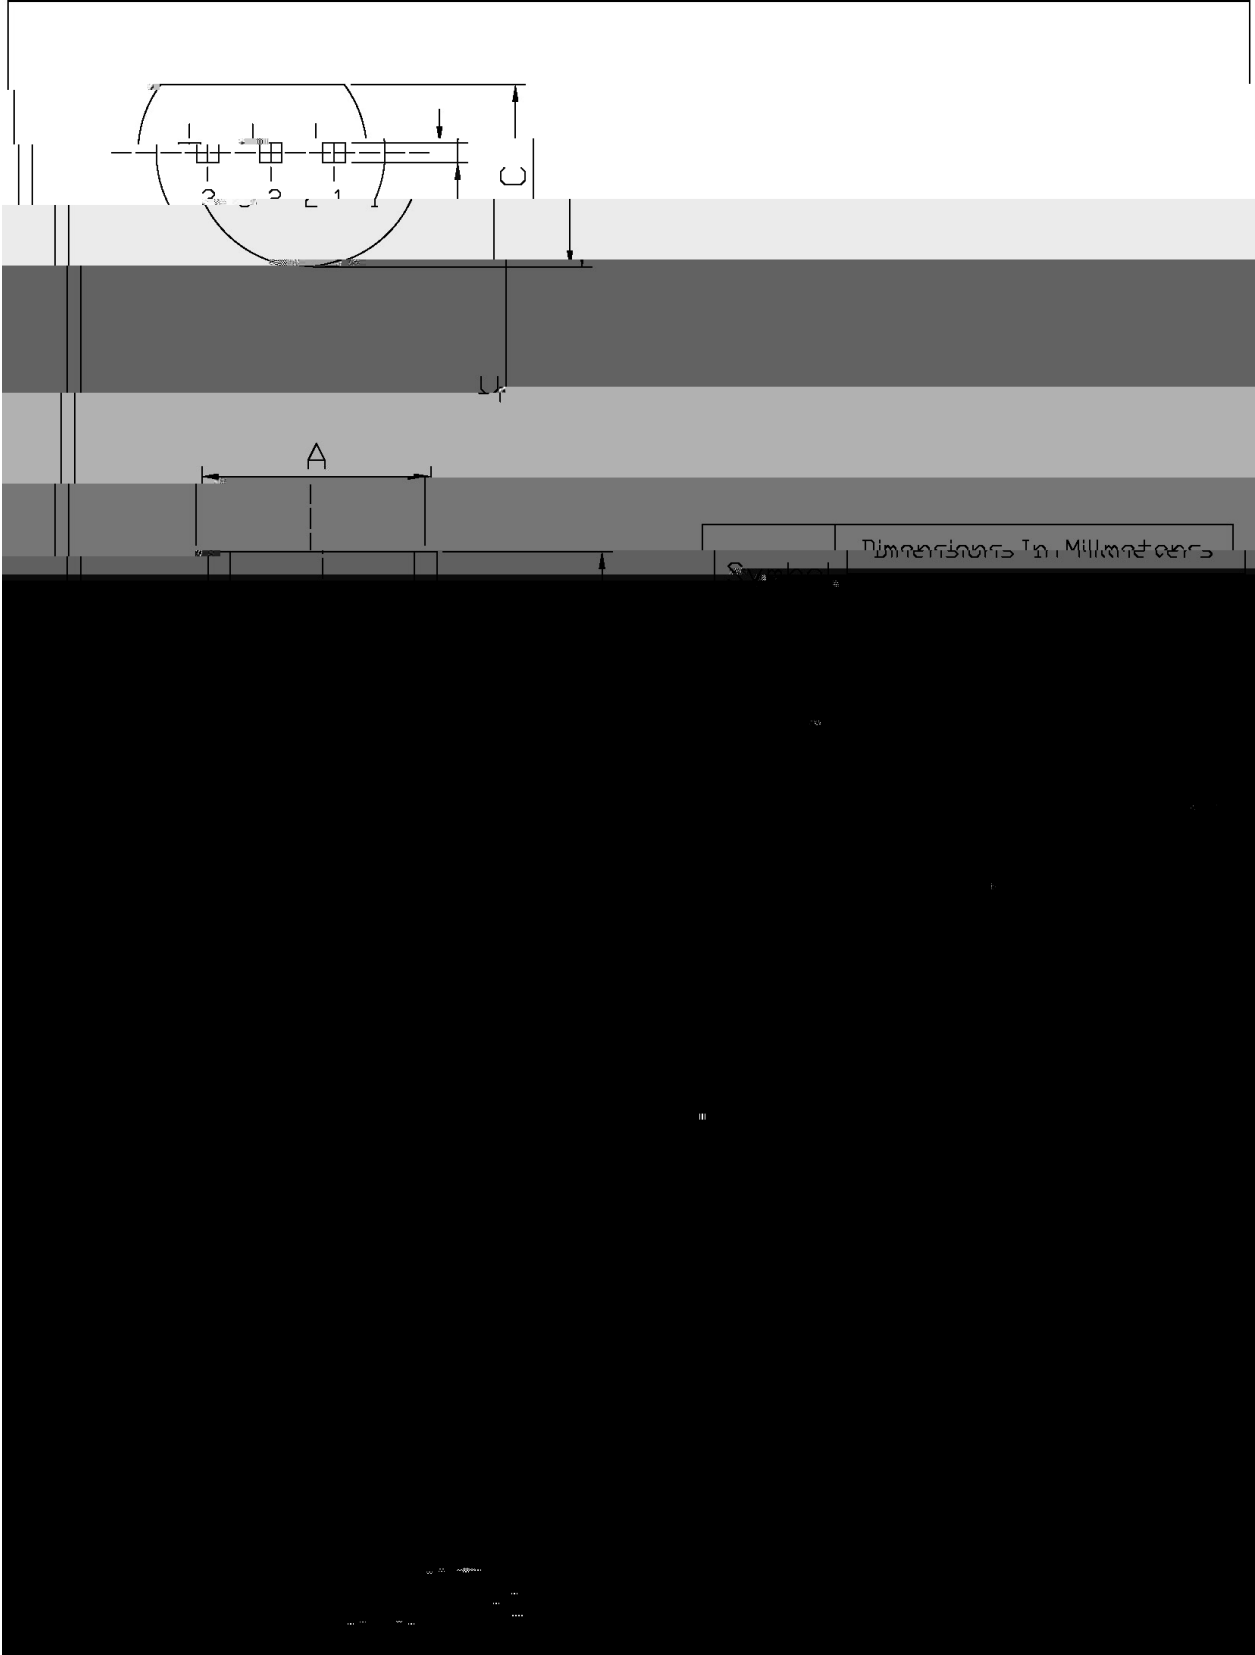

/ Marking Instructions

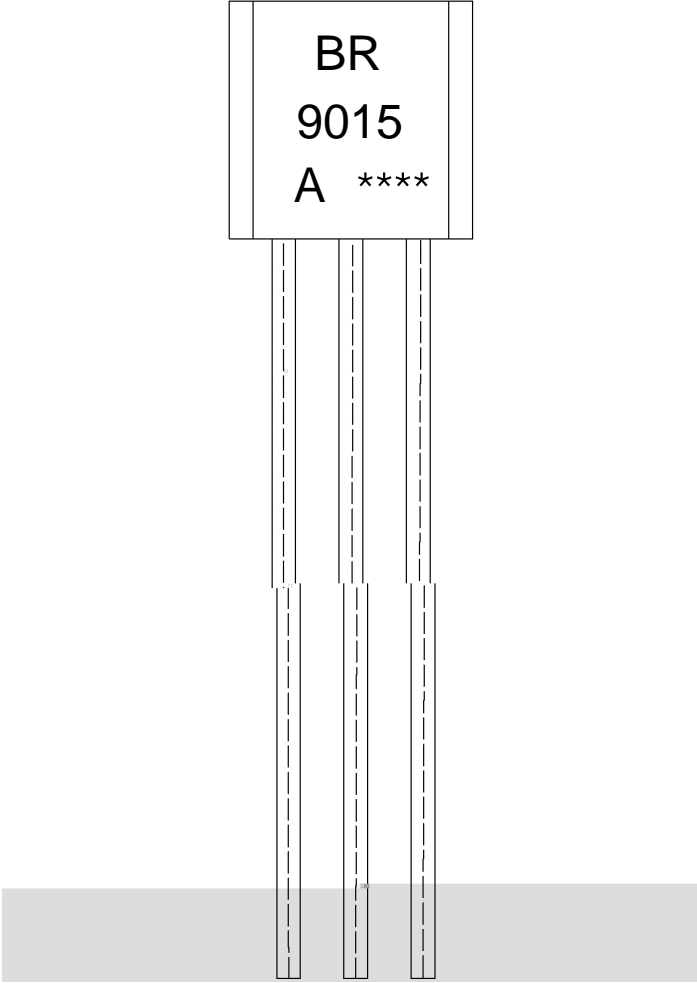


BR
9015
A: h_{FE}

Note:

BR: Company Code.
9015: Product Type.
A: h_{FE} Classifications Symbol.
****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

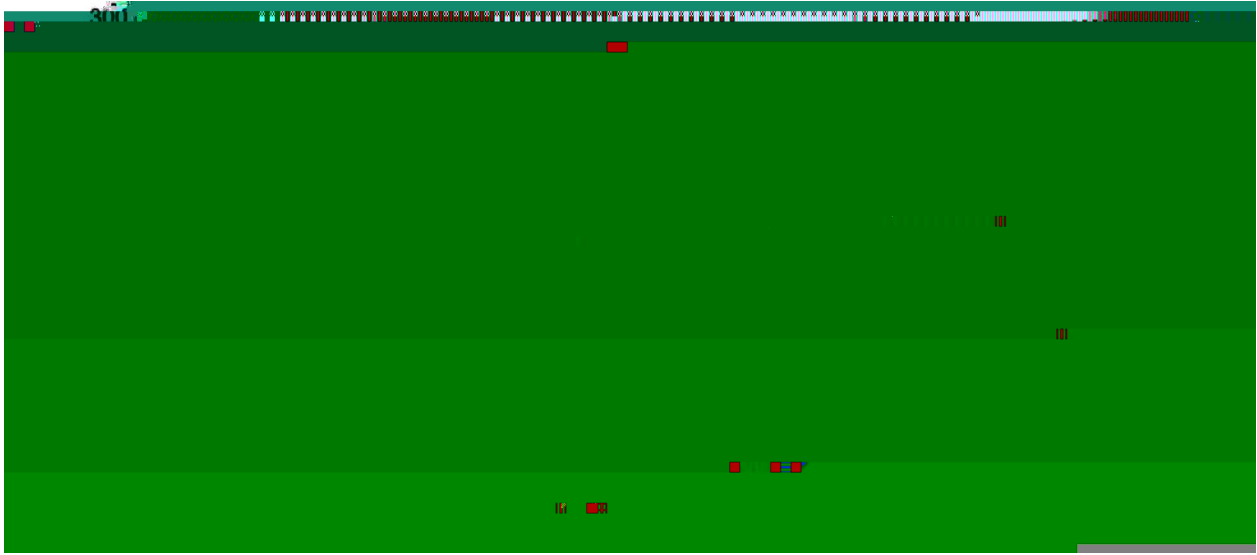

1	25	150	60	90sec;	Note:
2	255±5		5±0.5sec;	1.Preheating:25~150 , Time:60~90sec.	
3		2	10 /sec.	2.Peak Temp.:255±5 , Duration:5±0.5sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK