

# ABS201~ABS210

Rev.G Mar.-2026

## / Descriptions

2.0A

ABS/LBF

2.0A Surface Mount Glass Passivated Bridge Rectifier, ABS/LBF thin package.

## / Features

100V~1000V


2.0A

Glass Passivated Chip Junction, Reverse Voltage: 100 to 1000V, Forward Current: 2.0A, High Surge Current Capability, Designed for Surface Mount Application, Halogen free product.


## / Applications

General purpose.

## / Equivalent Circuit




## / Pinning

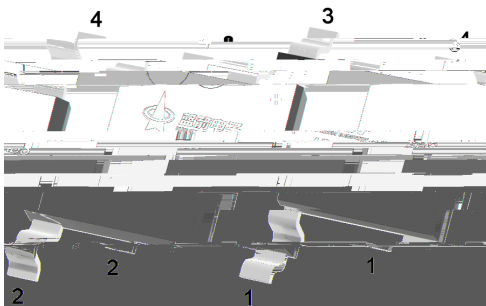

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Anode ( + )

The recommended mounting and size are as follows:

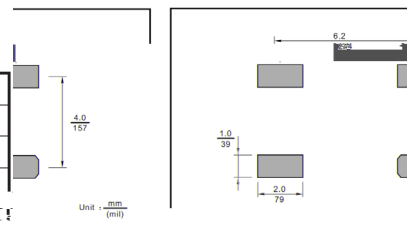

## / Marking

See Marking Instructions.

# ABS201~ABS210

Rev.G Mar.-2026

Parameter	Symbol	Rating					Unit
		ABS201	ABS202	ABS204	ABS206	ABS208	

**ABS201~ABS210**





# ABS201~ABS210

Rev.G Mar.-2026

DATA SHEET

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)


Note:

1            150   180            60