

E	2016-3				
F	2018-12-14	2	t		


**/ Descriptions**

SOT-23

**/ Features**

**/ Applications**

**/ Equivalent Circuit**



**/ Pinning**





**/  $h_{FE}$  Classifications & Marking**


--	--




/ Electrical Characteristic Curve

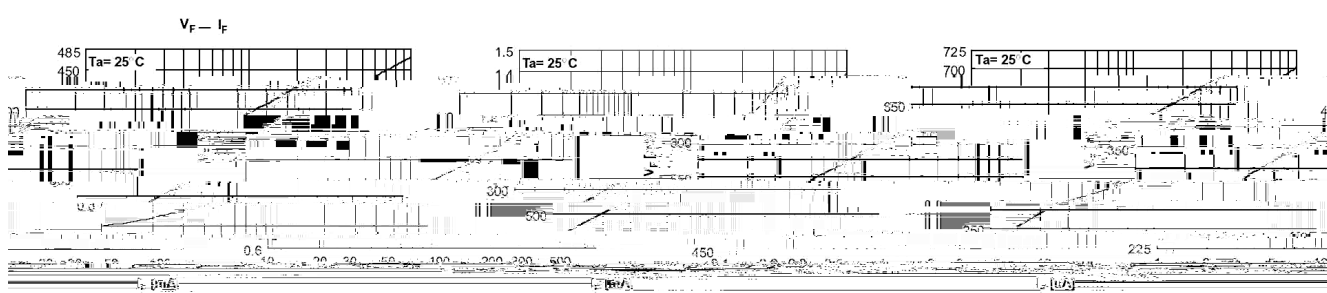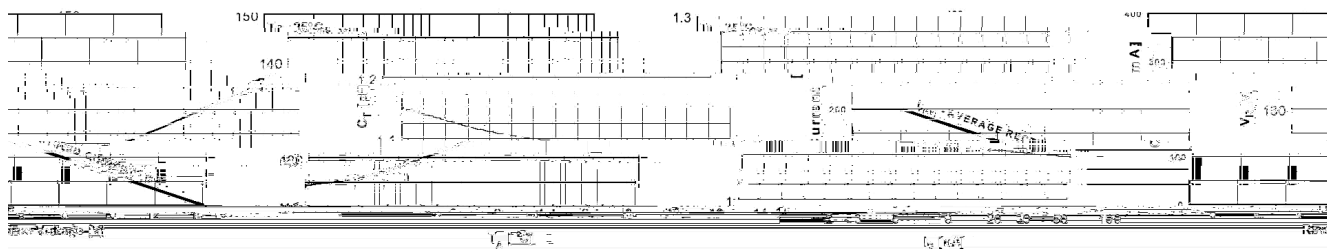



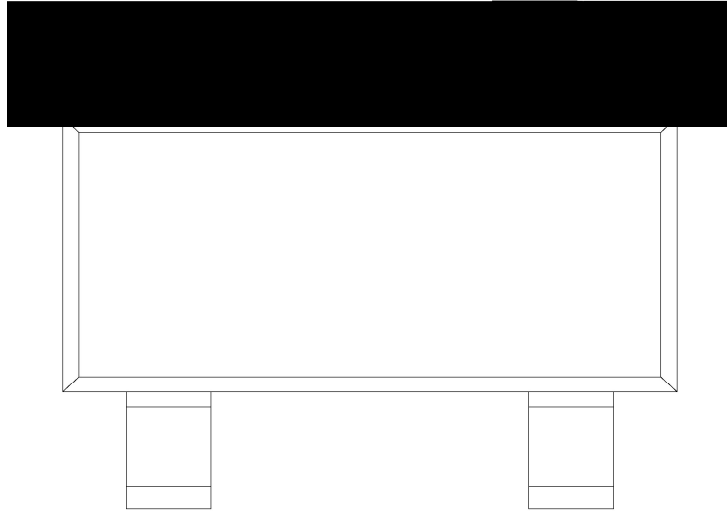

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

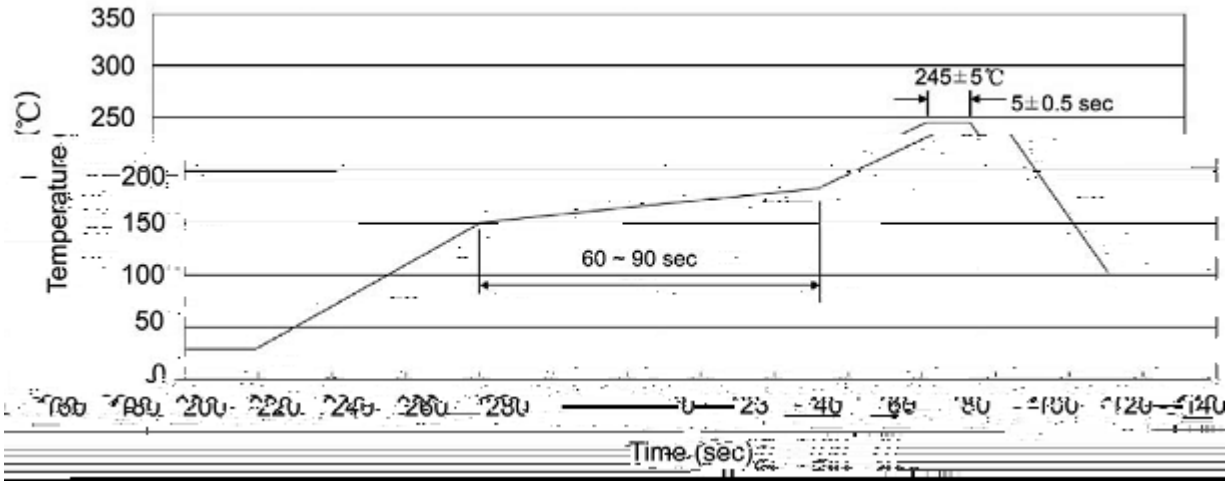

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

						" / fi		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box fl	Outer Box L
SOT-23	3,000	10	30,000	8	240,000	7" x8	180x120x180	385x257x392

/ Notices