



~	· ° " ' „	~ · °   / fi	· ° fl Ł   † Ž	ž !	" #

\$ % & ' ( ) Ł \* + , &  
- . / 0 1 2 3 4 5  
6 7 8 9 : ; < = > ? @ - . \*  
+ | A B < = C



Rev.A Jul.-2022

SOD-323 V WWX Y ( Z [ \ ] S


Schottky Diode in a SOD-323 Plastic Package.

4 5 6 7 8 9 : ; < = ' ^ \_ / 0 S


Qualified to AEC-Q101 Standards for High Reliability, HF Product.

+ ` a b % c d ' ? @ - . \* + I A B < = S

Small signal diode, Meet the stringent requirements of automotive applications.

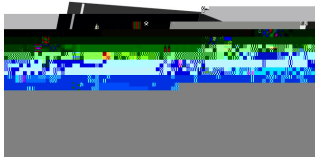

PIN1:Cathode

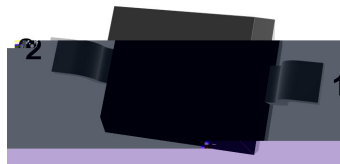

PIN2:Anode


Marking	Q86
---------	-----



Parameter	Symbol	Rating	Unit
Repetitive peak reverse voltage	$V_{RRM}$	30	V



Rev.A Jul.-2022

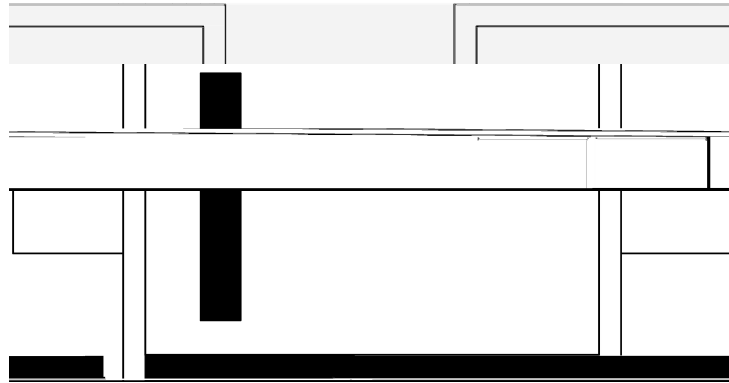

mn R

QR G - . ^ \_ / 0 6 o

86R G \$ %p fi

R

Package Type  
封装形式

Units/Reel  
/

Reels/Inner Box  
/

Units/Inner Box  
/

Inner Boxes/Outer Box  
/

Units/Outer Box  
/

Reel

Inner Box 盒

Outer Box 箱