

BRBAV23AQ/CQ/SQ

Rev.A Dec.-2022

BRBAV23AQ/CQ/SQ

Rev.A Dec.-2022



DATA SHEET

Parameter	Symbol	Rating	Unit
Repetitive Reverse Voltage	V_{RRM}	250	V
Reverse Voltage	V_R	200	V
Working Peak Reverse Voltage	V_{RWM}		
RMS Reverse Voltage	$V_{R2003} (V)] T J E T 5 5 . 4 6$		

Symbol S3.6(p)-60.4()TJ/TT9 1 T12

Symbol


Parameter

	$rV u] \mu$		


T =e 01514.9()766(f)14MHz

V


/ Electrical Characteristic Curve

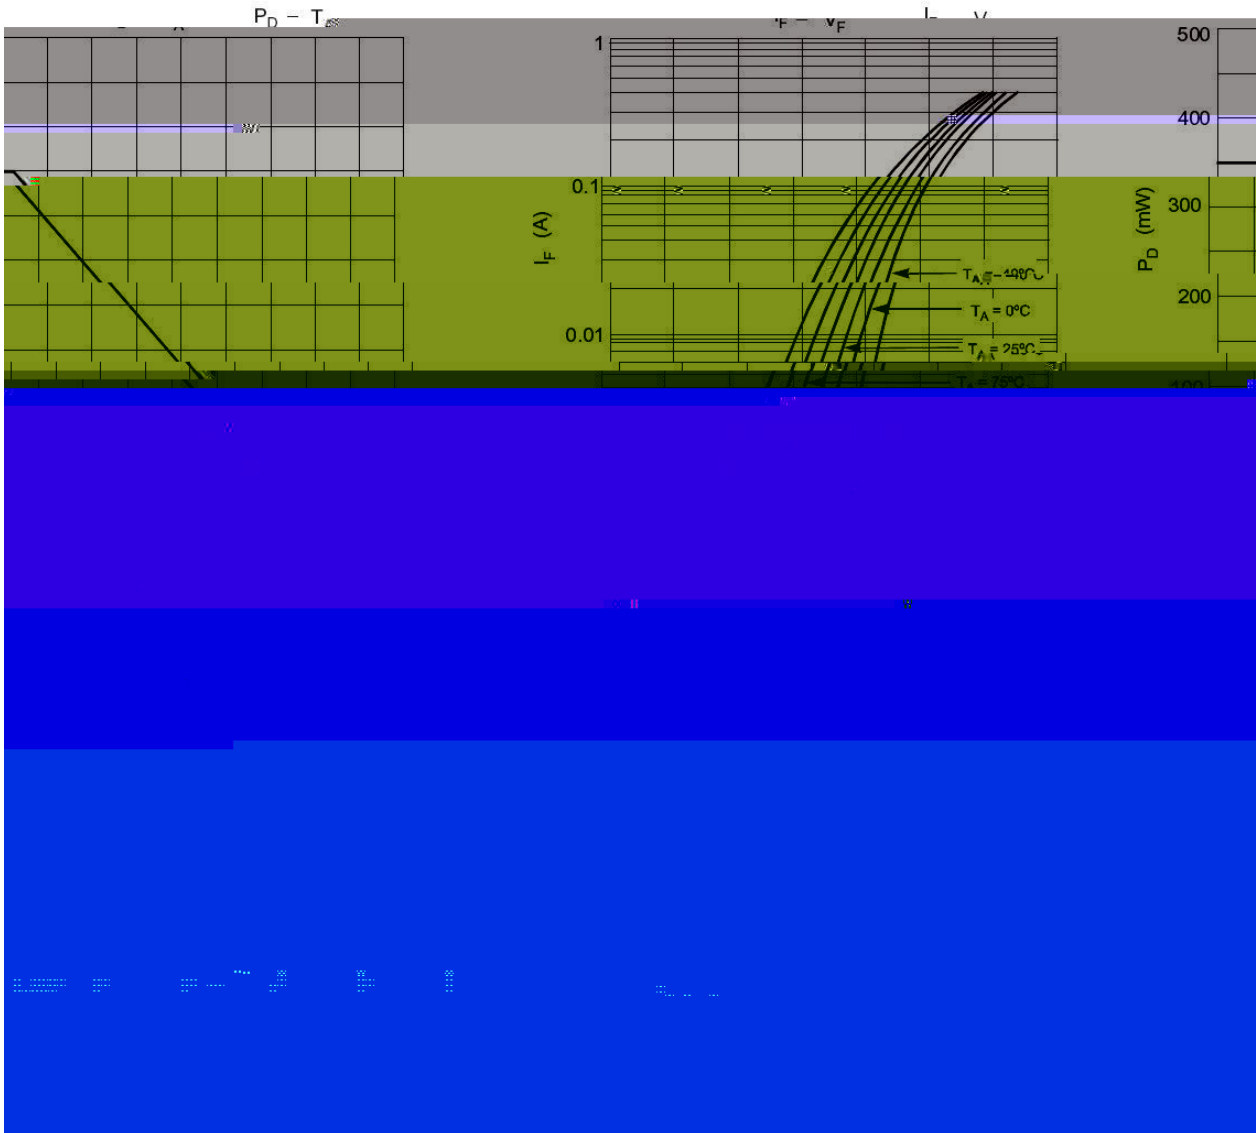

/ Package Dimensions

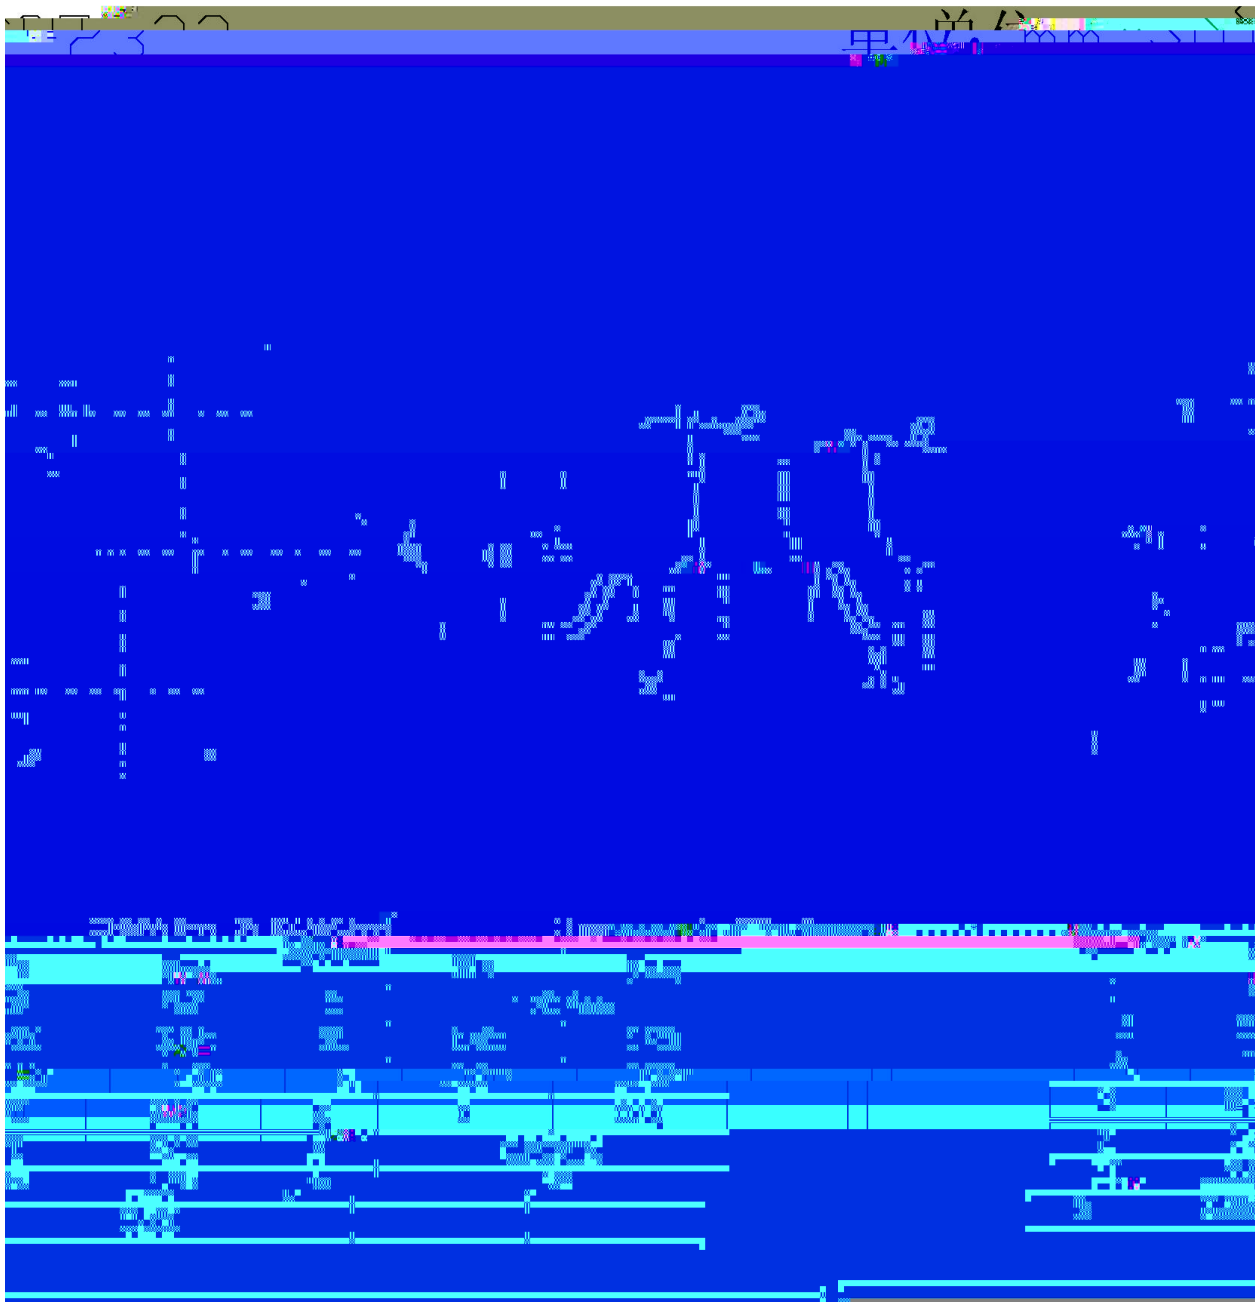

/ Marking Instructions

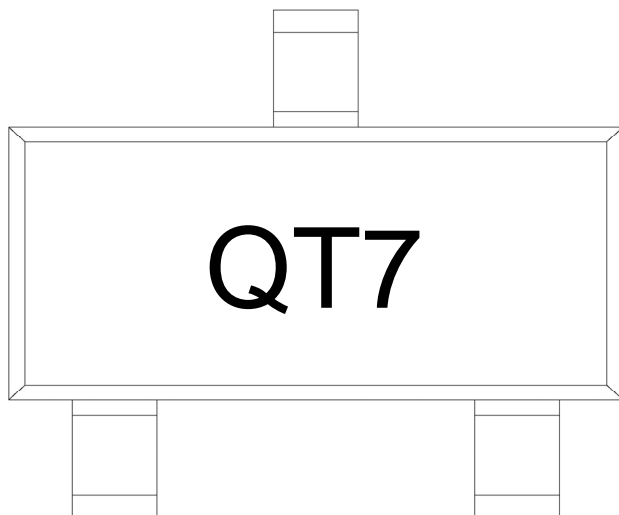

Q

T7

Note:

Q: Automobile halogen-free product Code

T7: Product Type

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- 1 150 200 60 120sec; 1.Preheating:150~200 , Time:60~120sec.
- 2 255±5 5±0.5sec; 2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3 2 10 /sec. 3.Cooling Speed: 2~10 /sec.

