
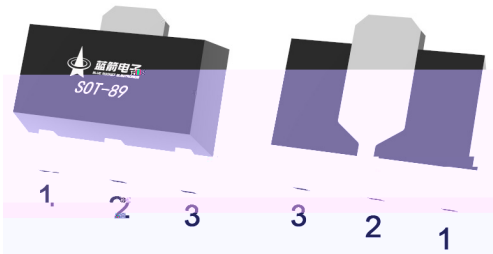


Silicon NPN transistor in a SOT-89 Plastic Package.

High current, low voltage, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

Driver stages of audio and video amplifiers applications, Meet the stringent requirements of automotive applications.

**/ Equivalent Circuit**



PIN1 Base      PIN 2 Collector      PIN 3 Emitter

**/ Marking**

|                             |        |         |
|-----------------------------|--------|---------|
| $h_{FE(1)}$ Classifications | 10     | 16      |
| $h_{FE(1)}$ Range           | 63 160 | 100 250 |






**/ Absolute Maximum Ratings(Ta=25 )**

| Parameter                    | Symbol                               | Rating  | Unit |
|------------------------------|--------------------------------------|---------|------|
| Collector to Base Voltage    | V <sub>CB0</sub>                     | 100     | V    |
| Collector to Emitter Voltage | V <sub>CEO</sub>                     | 80      | V    |
| Emitter to Base Voltage      | V <sub>EBO</sub>                     | 5       | V    |
| Collector Current-Continuous | I <sub>C</sub>                       | 1       | A    |
| Peak Collector Current       | I <sub>CM</sub>                      | 1.5     | A    |
| Peak Base Current            | I <sub>BM</sub>                      | 0.2     | A    |
| Collector Power Dissipation  | P <sub>C</sub> (T <sub>C</sub> =25 ) | 1.3     | W    |
| Storage Temperature Range    | T <sub>stg</sub>                     | -55 150 |      |

**/ Electrical Characteristics(Ta=25 )**

| Parameter  | Symbol                    | Test Conditions   | Min | Typ | Max | Unit |
|--|---------------------------|---|-----|-----|-----|------|
| Collector to Base Breakdown Voltage              | V <sub>CB0</sub>          | I <sub>C</sub> =100 A I <sub>E</sub> =0                       | 100 |     |     | V    |
| Collector to Emitter Breakdown Voltage           | V <sub>CEO</sub>          | I <sub>C</sub> =500 A I <sub>B</sub> =0                       | 80  |     |     | V    |
| Emitter to Base Breakdown Voltage                | V <sub>EBO</sub>          | I <sub>E</sub> =100 A I <sub>C</sub> =0                       | 5.0 |     |     | V    |
| Collector Cut-Off Current                        | I <sub>CB0(1)</sub>       | V <sub>CB</sub> =30V I <sub>E</sub> =0                        |     |     | 0.1 | μA   |
|  | I <sub>CB0(2)</sub>       | V <sub>CB</sub> =30V I <sub>E</sub> =0<br>T <sub>j</sub> =125 |     |     | 10  | μA   |
| Emitter Base Cut-Off Current                     | I <sub>EBO</sub>          | V <sub>EB</sub> =5V I <sub>C</sub> =0                         |     |     | 0.1 | μA   |
| DC Current Gain                                  | h <sub>FE(1)</sub>        | V <sub>CE</sub> =2V I <sub>C</sub> =150mA                     | 63  |     | 250 |      |
|  | h <sub>FE(2)</sub>        | V <sub>CE</sub> =2V I <sub>C</sub> =5mA                       | 40  |     |     |      |
|  | h <sub>FE(3)</sub>        | V <sub>CE</sub> =2V I <sub>C</sub> =500mA                     | 25  |     |     |      |
| Collector to Emitter Saturation Voltage          | V <sub>CE(sat)</sub>      | I <sub>C</sub> =500mA I <sub>B</sub> =50mA                    |     |     | 0.5 | V    |
| Base to Emitter Voltage                          | V <sub>BE</sub>           | I <sub>C</sub> =500mA V <sub>CE</sub> =2V                     |     |     | 1   | V    |
| Transition Frequency                             | f <sub>T</sub>            | I <sub>C</sub> =10mA V <sub>CE</sub> =5V<br>f=100MHz          |     | 130 |     | MHz  |
| DC Current Gain Ratio Of The Complementary Pairs | $\frac{h_{FE1}}{h_{FE2}}$ | I <sub>C</sub>  =150mA  V <sub>CE</sub>  =2V                  |     | 1.3 | 1.6 |      |


/ Electrical Characteristic Curve

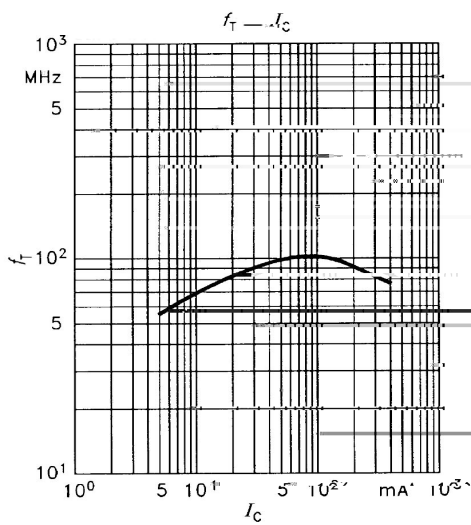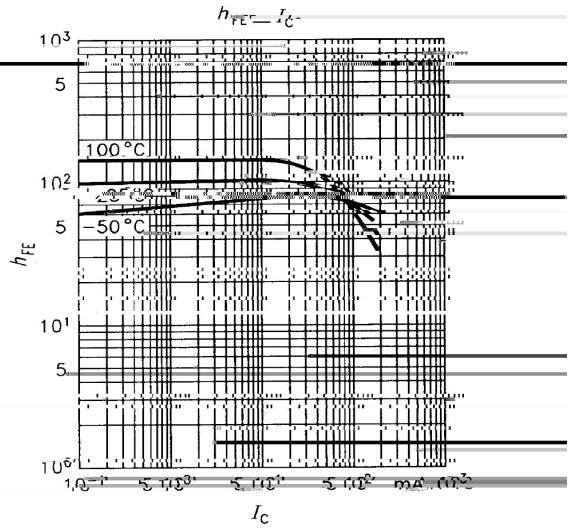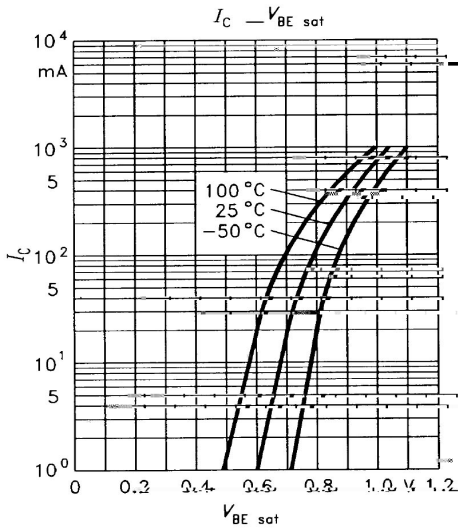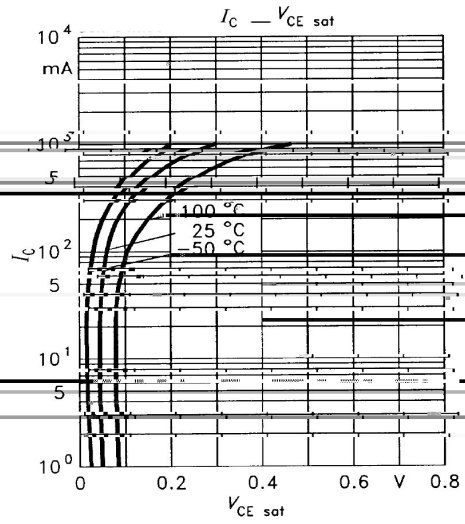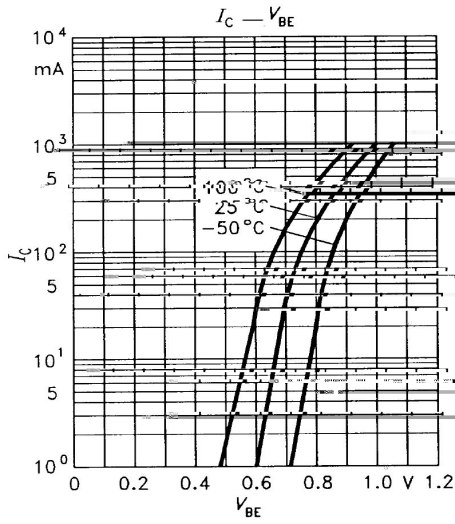


/ Package Dimensions

SOT-89

单位: mm

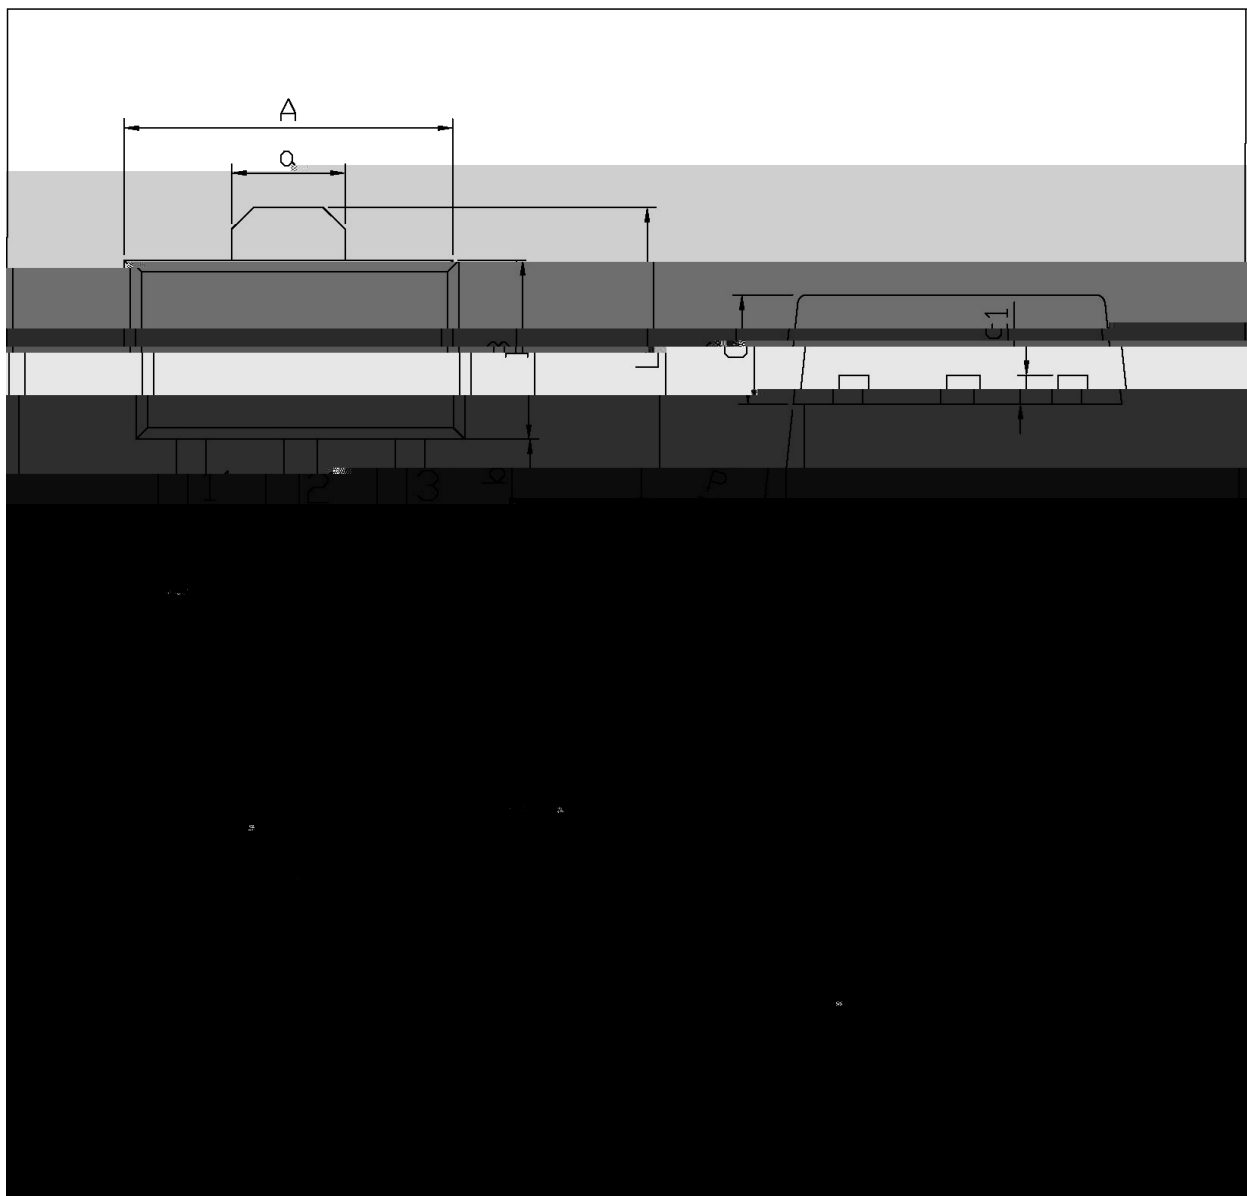

/ Marking Instructions

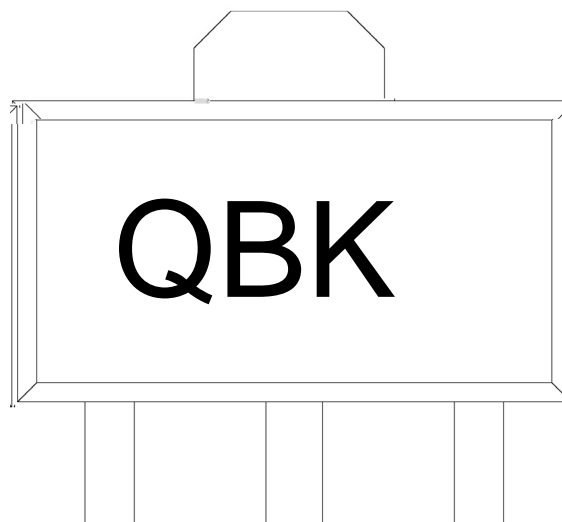

BK

Note:

Q: Automobile halogen-free product Code

BK: Product Type

\*\* : Lot No. Code, code change with Lot No

**BRBCX56Q**  
Rev.A Mar.-2023