

BRBT1208CWFA

Rev.A Nov.-2023



DATA SHEET




:5 ,.> //x E g U OJ'oz

BRBT1208CWFA

Rev.A Nov.-2023

DATA SHEET

Ω ? d • Ž ϕ / Electrical Characteristic Curve

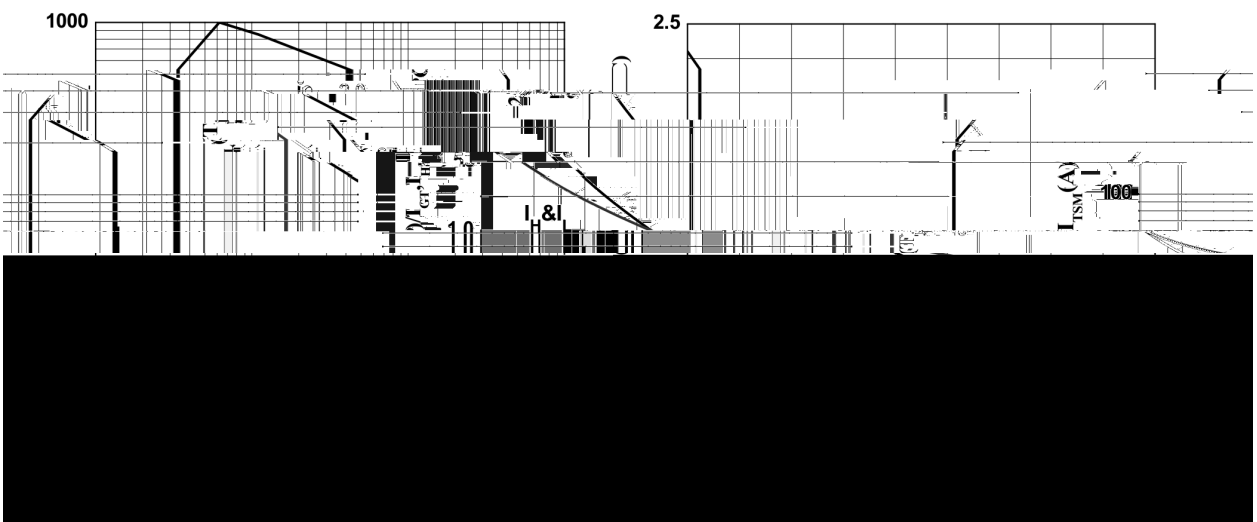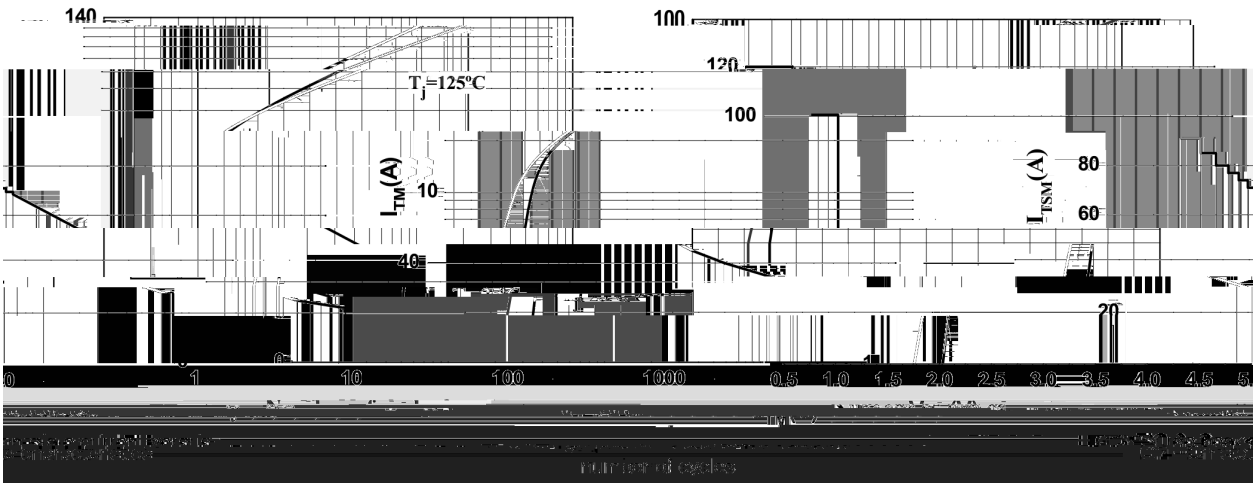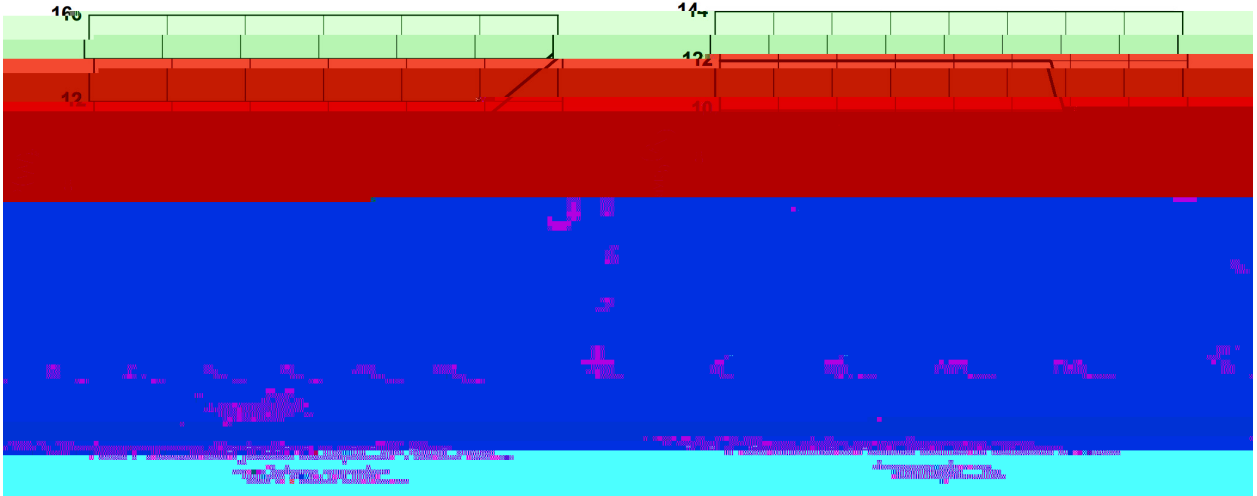

∅ □ =) ∅ / Package Dimensions




BRBT1208CWFA

Rev.A Nov.-2023



DATA SHEET

, M y f / Marking Instructions

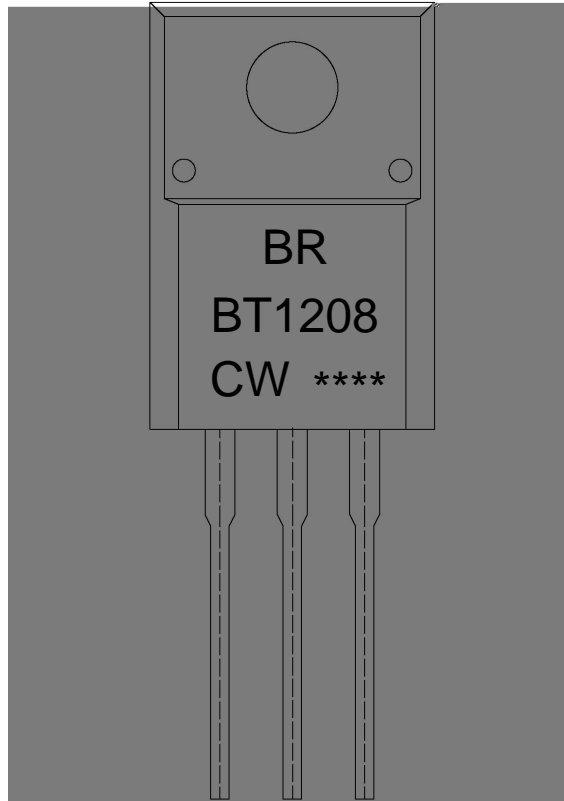

a ç y
(8 y , [W A
(: y ° Z W A
) = y - : ã W A
 y ÿ D Z W A k š ÿ D Z J

Note:

- BR: Company Code
- BT1208: Product Type Code
- CW: I_{GT} Bracket code
- ****: Lot No. Code, code change with Lot No

G PD t... • Ž φ (x /) / Temperature Profile for Dip Soldering(Pb-Free)

a φ y

1o• Ä ½ “ † 25 ½150 - k ž • 60 ½90sec;

2o• Q › “ † 255 r5 - k ž • 4 Ò 5 r0.5sec;

3o•D N ò i Ò 0 , † 2 ½10 - /sec.

Note:

1.Preheating:25~150 - , Time:60~90sec.

2.Peak Temp.:255 r5 - , Duration:5 r0.5sec.

3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p - »] / Resistance to Soldering Heat Test Conditions

“ † y 270 r5 -

ž • y 10 r1 sec.

Temp.:270±5

Time:10±1 sec

G P á / Packaging SPEC.

• ^ x / BULK

Package Type
7>û ~ E

Units ;>û iH

Dimension ;>û p .