


**BRCL4058FZR**



**DATA SHEET**

/ Pinning

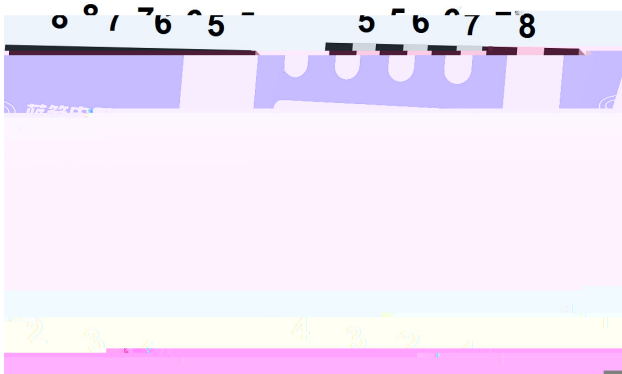


PIN Num.	Symbol	Function
	GI F >	

/ Absolute Maximum Ratings(Ta=25 )

PARAMETER	SYMBOL	RATINGS	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
V <sub>CC</sub> Under voltage						

/ Principle block diagram

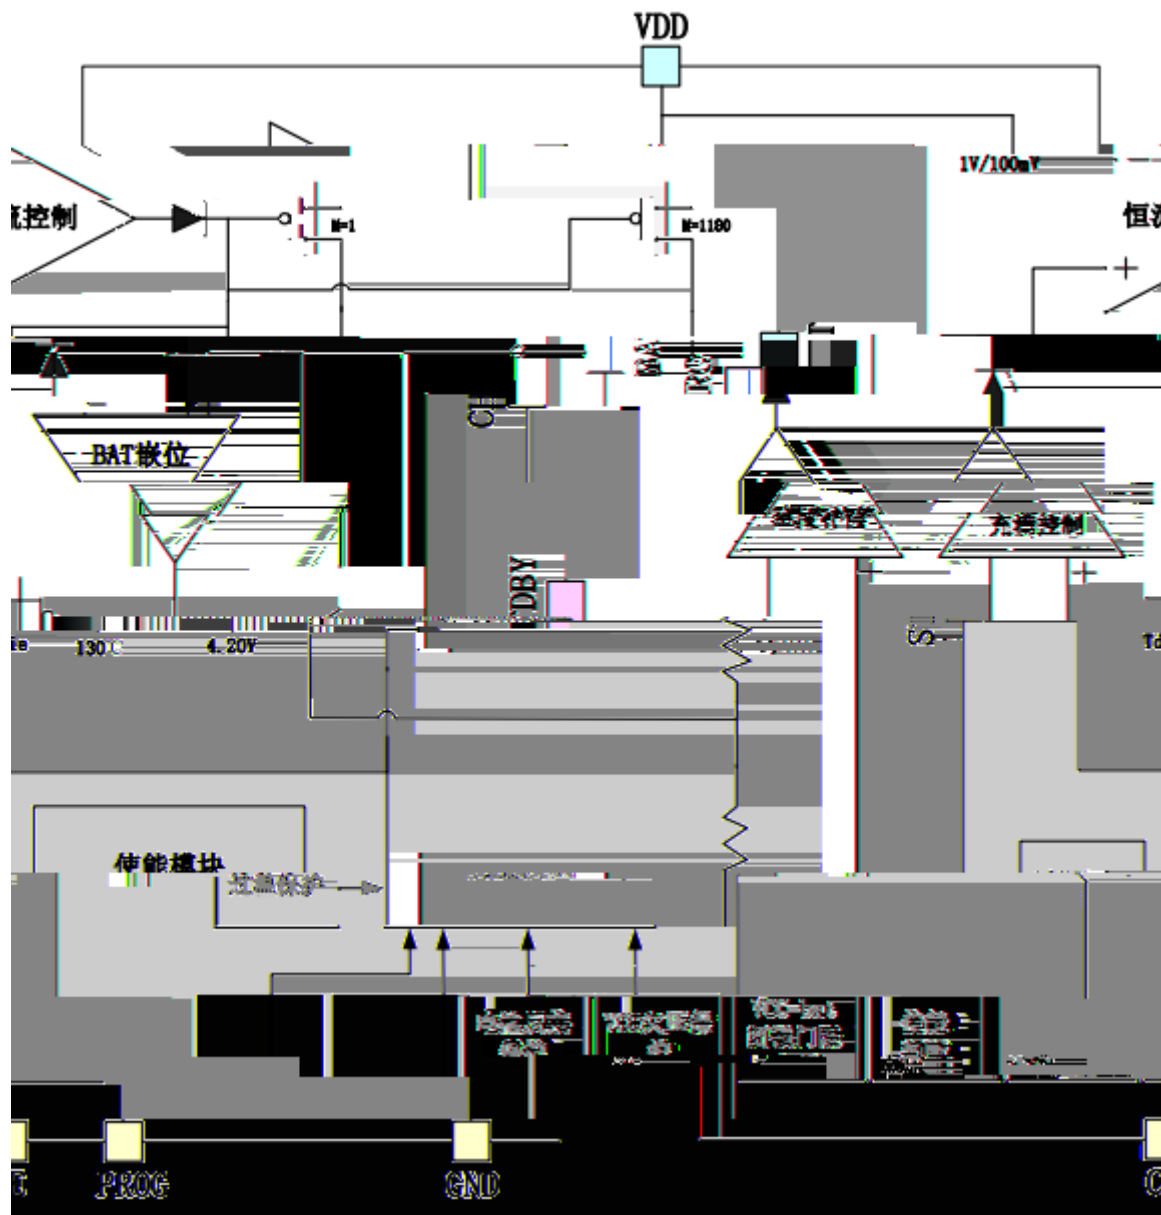

BRCL4058FZR




/ Function description

◆

◆


◆

/ Package Dimensions

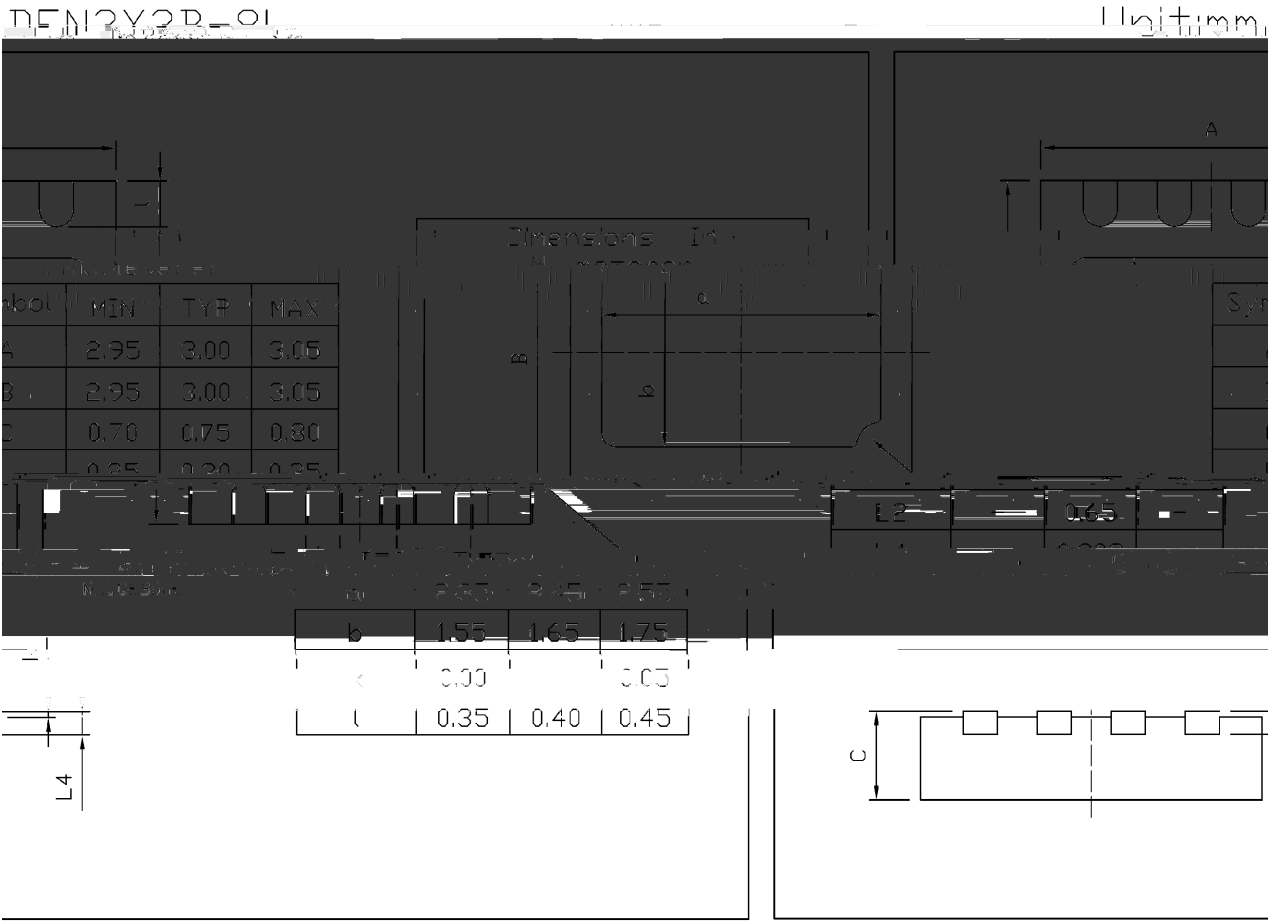



( ) / K\d g\iXK i\`Gif]`Δ ]fi @ `I \]dn `Jf d \i`e^ŽGYS=i\ž

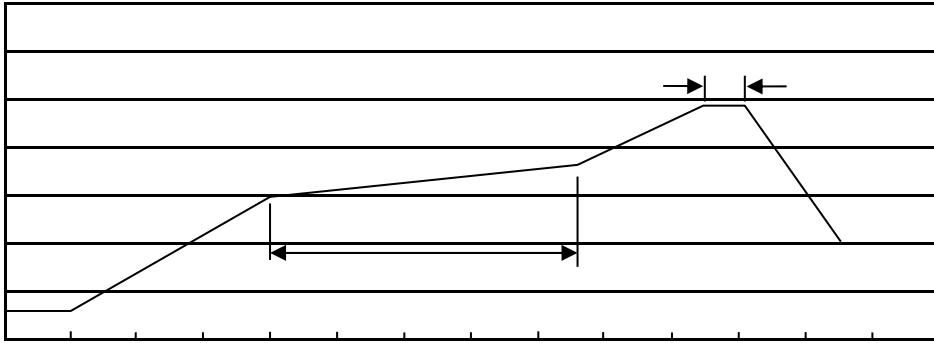

... ..

/ Resistance to Soldering Heat Test Conditions

... ..

/ Packaging SPEC.


/ Notices