


/ Pinning

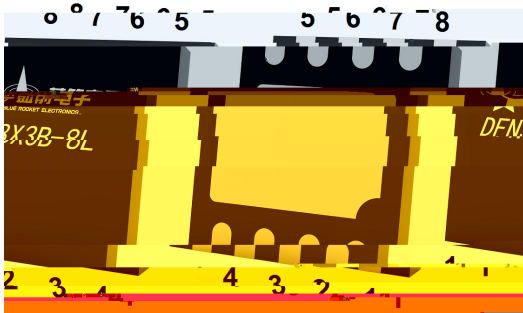

PIN Num.	Symbol	Function
1	TEMP	
2	GI F >	
3	GND	
4	VDD	, M
5	BAT	
6	STDBY	
7	CHRG	
8	CE	

/ Absolute Maximum Ratings(Ta=25)

PARAMETER	SYMBOL	RATINGS	UNITS
VDD/CHRG/STDBY Pin Voltage	$V_{VDD/CHRG/STDBY}$	-0.3~36	V
VCE Pin Voltage	V_{CE}	-0.3~32	
BAT Pin Voltage	V_{BAT}	-5~15	
PROG Pin Voltage	V_{PROG}	-0.3~6	
TEMP Pin Voltage	V_{TEMP}	-0.3~15	
Operating Ambient Temperature Range	T_{OP}	-40~+85	°C
Storage Temperature	T_{stg}	-55~+150	°C
Lead Temperature (Soldering, 10s)	T_{solder}	260	°C
ESD	HBM	2000	V
	MM	200	V

BRCL4058NZR-4.2
Rev.B Aug.-2025

BRCL4058NZR-4.2

Rev.B Aug.-2025




DATA SHEET

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Indicator Pin Status CHRG/STDBY						
CHRG Pin Output Current	I _{CHRG}	V _{DD} =5V;V _{CHRG} =1V	1	2.5	5	mA

BRCL4058NZR-4.2
Rev.B Aug.-2025

/ Package Dimensions

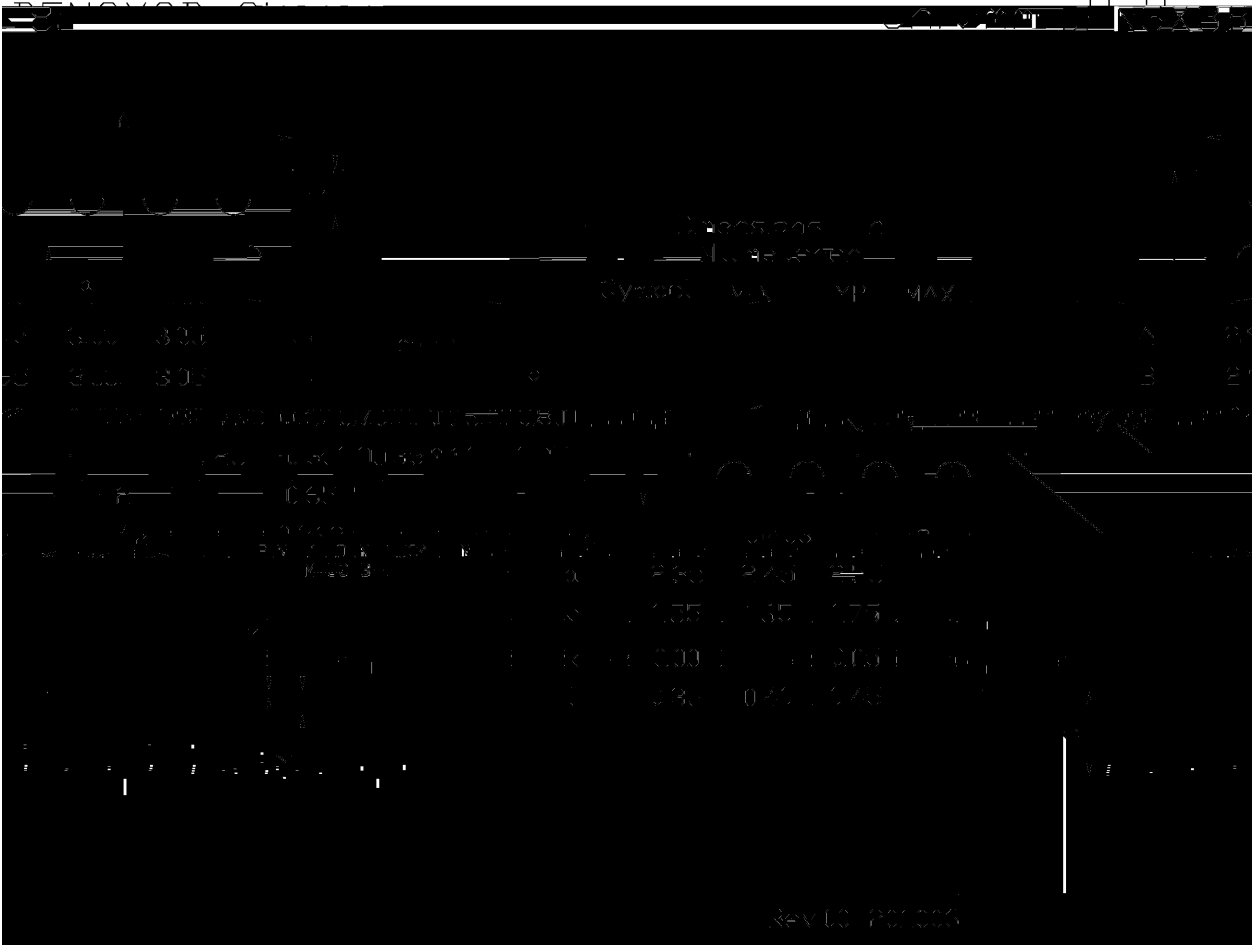

/ Marking Instructions



9I

+', /E

XX

!!!!

BRCL4058NZR-4.2	BR/4058N-42/****

