

# BRCO2600Series

BRCO 2600Series

CMC



±














E F G H ° / Package Dimensions

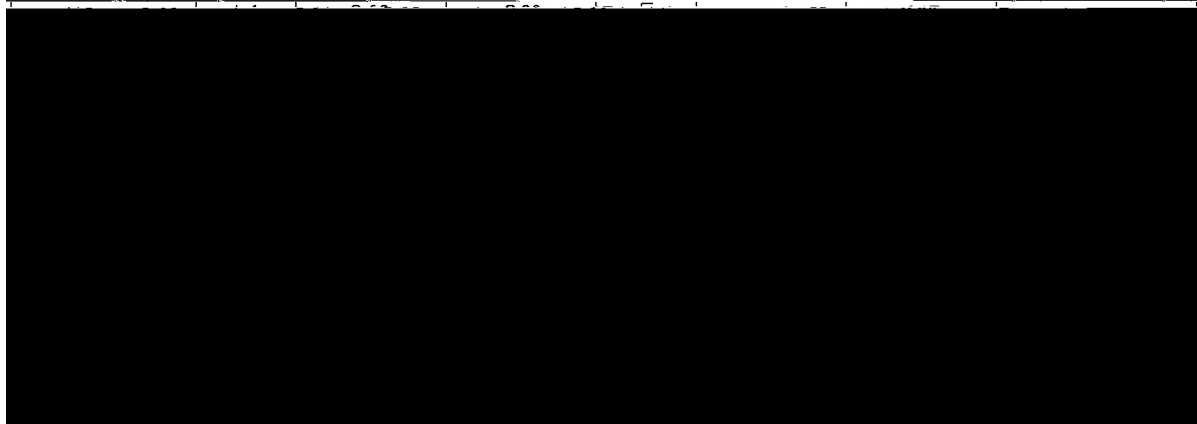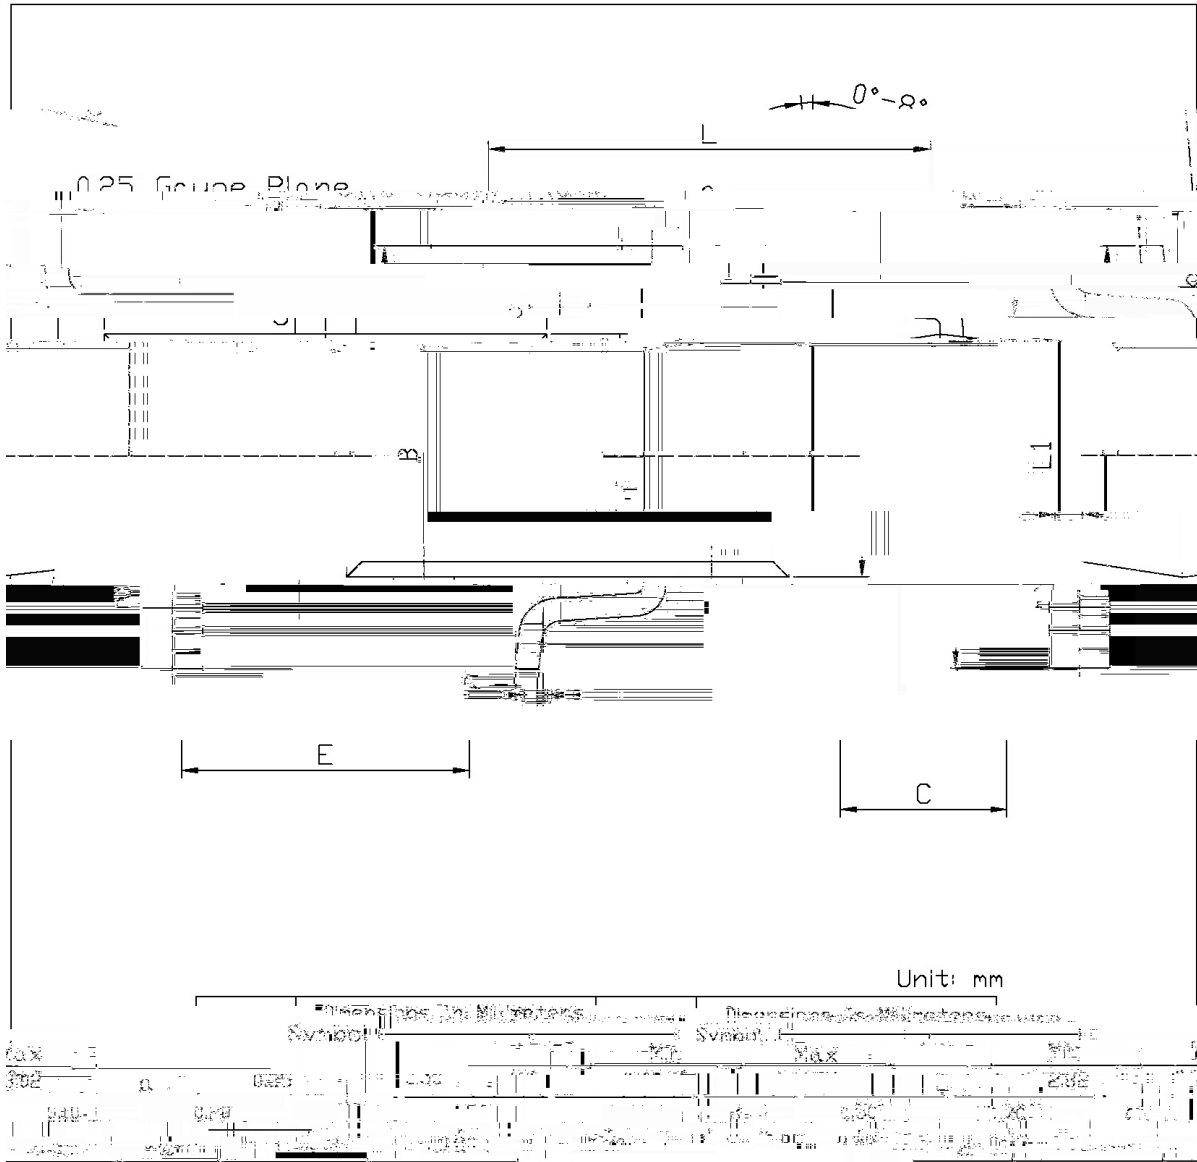





E F G H ° / Package Dimensions

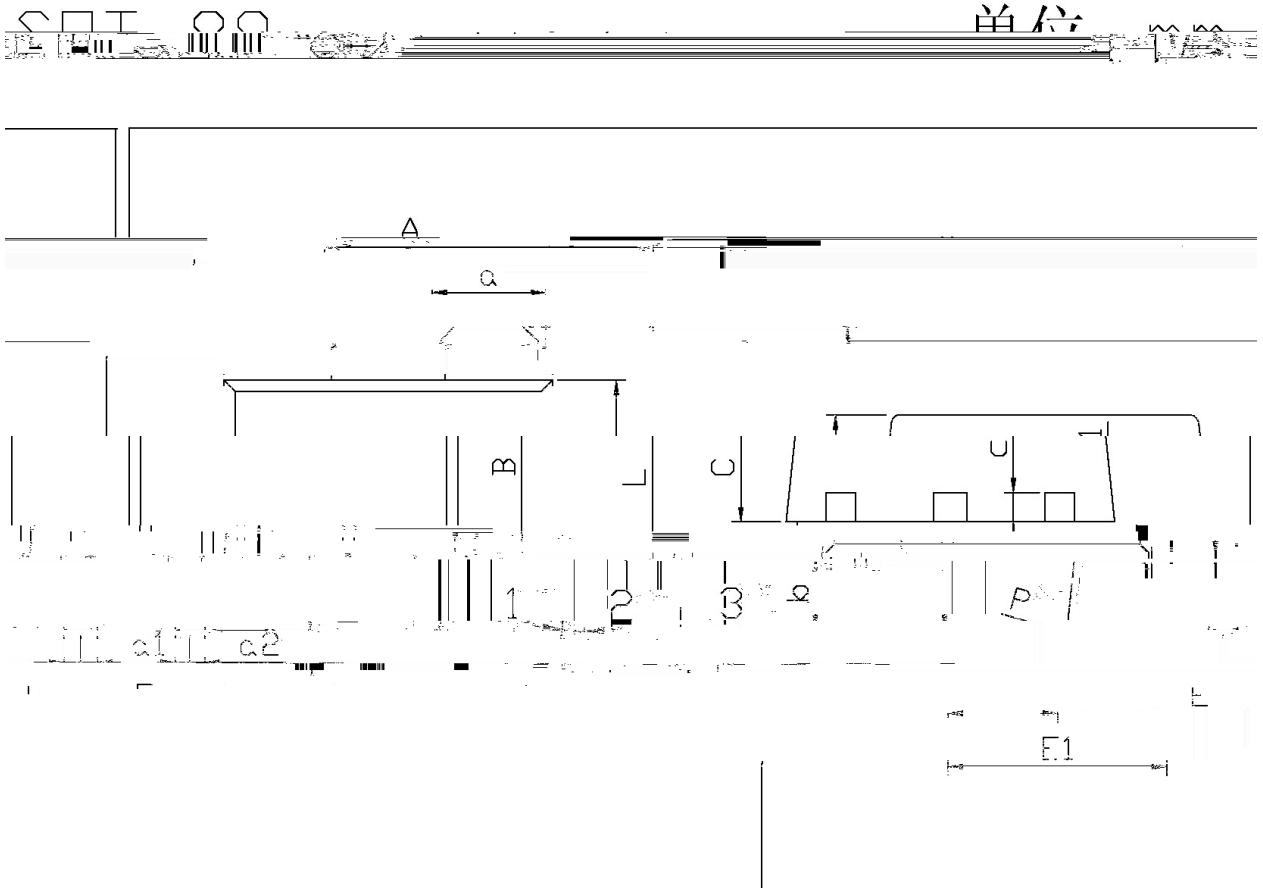

| Symbol | Dimension in Millimeters |       | Symbol | Dimension in Millimeters |      |
|--------|--------------------------|-------|--------|--------------------------|------|
|        | Min                      | Max   |        | Min                      | Max  |
| A      | 4.4                      | 4.7   | a1     | 10.36                    | 0.56 |
| B      | 3.878                    | 4.478 | a2     | 1.48                     | 0.80 |
| C      | 1.48                     | 1.50  | E      | 1.40                     | 1.60 |
| E1     | 2.80                     | 3.20  | E      | 1.40                     | 1.60 |
| b      | 0.80                     | 1.20  |        |                          |      |






## **BRCO2600Series**



# BRCO2600Series

MN OP Q = > ° (R S ) / T @ & U @ # f l % @ V % W @ W % X Y @ Z [ † Ž @ / \$ ]

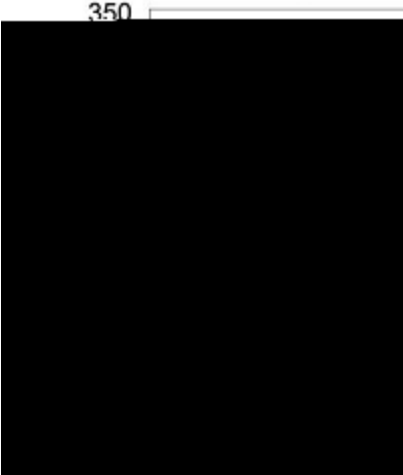

±

±

±

\_ O ` a b c d e / Resistance to Soldering Heat Test Conditions

±

±

±

f g h i / Packaging SPEC.

| 封装形式 | Units/Reel | Reels/Inner Box | Ur |
|------|------------|-----------------|----|
|      | /          | /               | /  |

| 封装形式   | Units/Reel | Reels/Inner Box | U |
|--------|------------|-----------------|---|
|        | 只/卷盘       | 卷盘/盒            |   |
| SOT-89 | 1,000      | 7               |   |

| 封装形式 | Units/Reel | Reels/Inner Box | Uni |
|------|------------|-----------------|-----|
|      | /          | /               | /   |

j + K L / Notices