



Parameter	Symbol	Rating	Unit
Working Voltage	$V_{IN}$	-0.3~+20	V
Thermal Resistance	$R_{JA}$	200	/W
Power Consumption	$P_W$	500	mW
Storage Temperature	$T_{STG}$	-50~+125	
Working Temperature	$T_A$	-40~+85	

Notes: If the device operating conditions over the maximum rating of the above-mentioned conditions, may cause permanent damage to the device. The above parameters is only part of the operating conditions the maximum, we do not recommend the device running outside the scope of this specification. If the device to work long hours under the condition of absolute maximum limit, its stability may be affected.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
The Output Voltage	$V_{OUT}$	$V_{IN}=5.3V, I_{OUT}=10mA$	3.234	3.30	3.366	V
The Output Current	$I_{OUT}$	$V_{IN}=5.3V$	300			mA
Load Regulation	$V_{OUT}$	$V_{IN}=5.3V$ $1mA \quad I_{OUT} \quad 300mA$		37	100	mV
Low Dropout	$V_{DIF}$	$I_{OUT}=100mA, \quad V_{OUT}=2\%$		195	300	mV
Static Power	$I_{SS}$	$V_{IN}=5.3V$		1.5	3.0	$\mu A$
Linear Regulation	$\frac{V_{OUT}-V_{OUT}^*}{V_{IN}}$	$4.3V \quad V_{IN} \quad 20V$ $I_{OUT}=1mA$			0.2	%/V
The Input Voltage	$V_{IN}$				20	V
Temperature Coefficient	$\frac{V_{OUT}}{T_A * V_{OUT}}$	$V_{IN}=5.3V, I_{OUT}=10mA$ $-40 \quad T_A \quad 85$		100		ppm/


 $V_{IN}=5.3V$ 

2%


 $V_{DIF}$ 

Note:  $V_{DIF}$  is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at  $V_{IN}=5.3V$  with a fixed load.


/ Basic Application

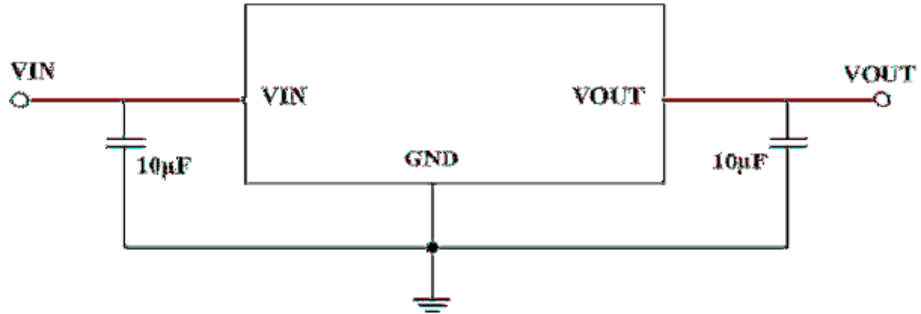


/ High Output Current Voltage Regulator

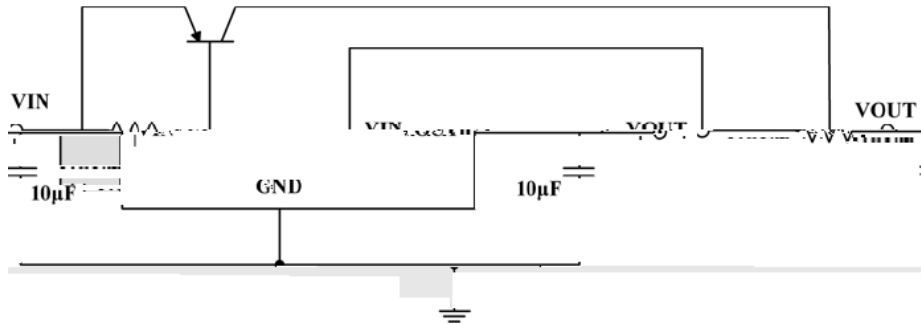


/ Short-Circuit Protection

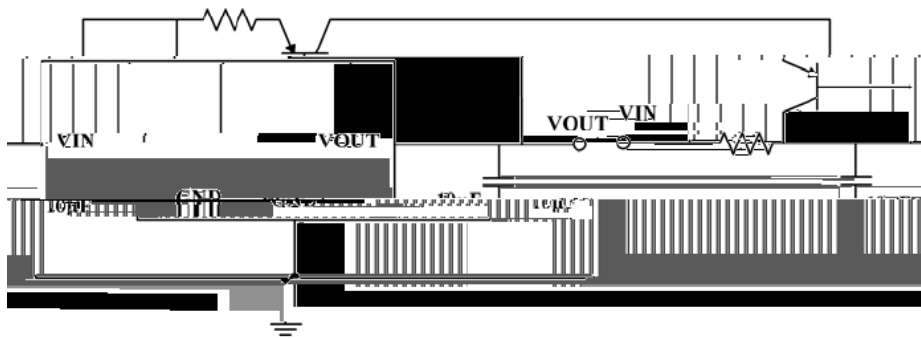



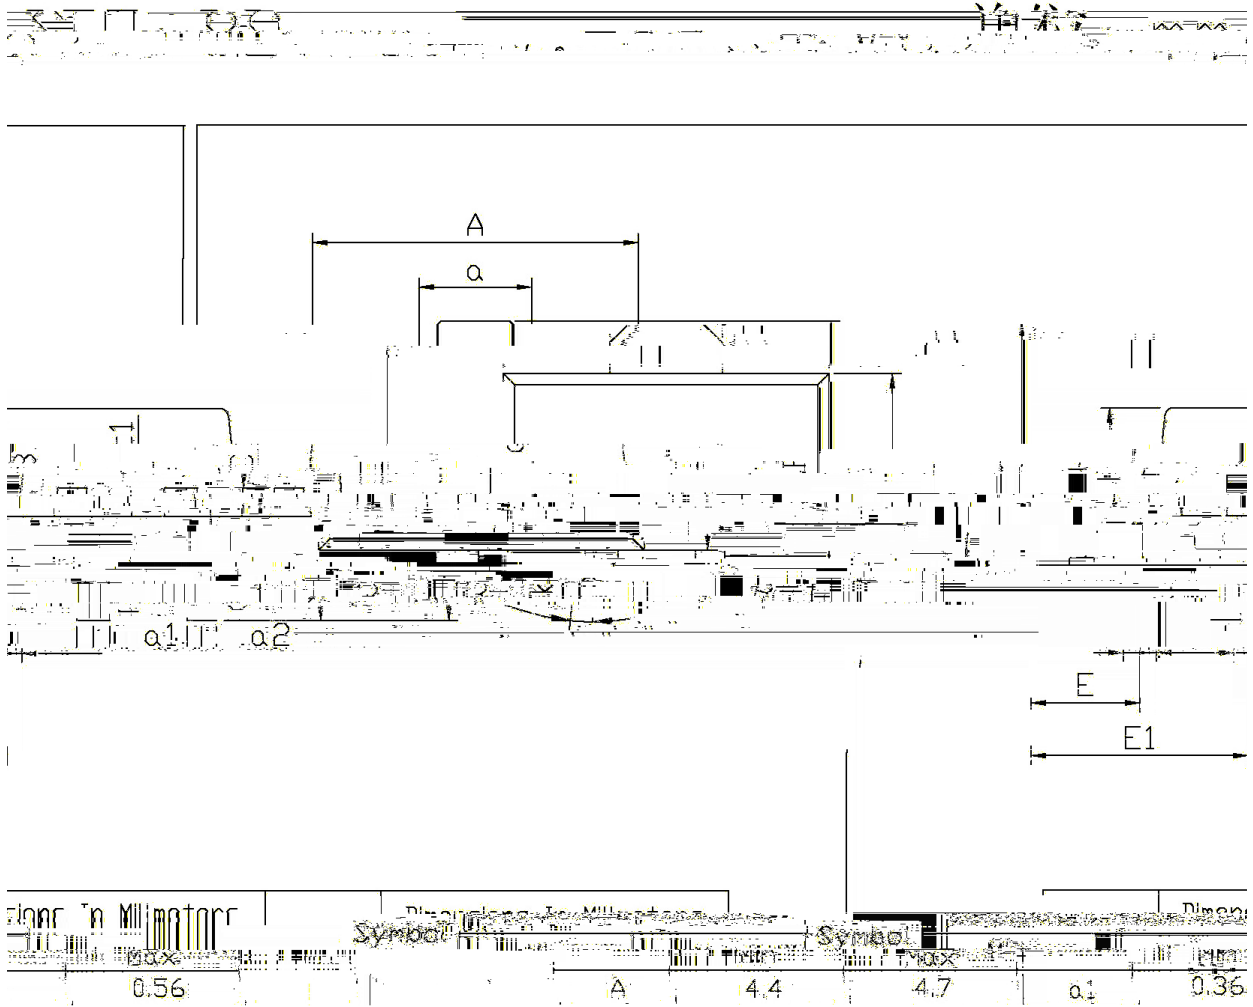

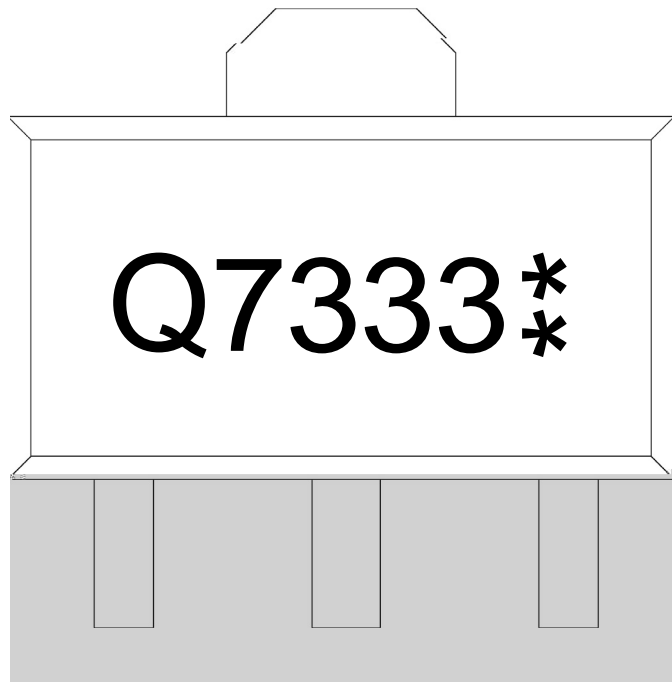

Q

7333


\*\*

Note:

Q: Automobile halogen-free product Code

7333: Product Type

\*\* : Lot No. Code, code change with Lot No

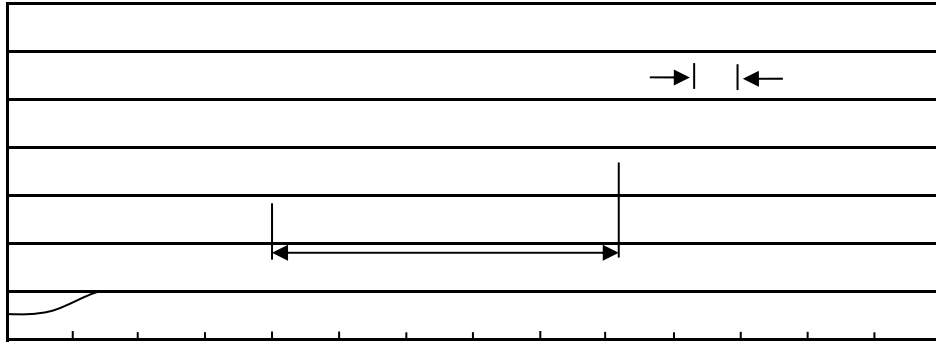

## Note:

- |   |         |            |   |
|---|---------|------------|---|
| 1 | 150 200 | 60 120sec; | 1.Preheating:150~200 , Time:60~120sec.  |
| 2 | 255±5   | 5±0.5sec;  | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | 2 10    | /sec.      | 3. Cooling Speed: 2~10 /sec.            |

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	6	42,000	7 ×12	180×120×180	390×385×205