

/ Descriptions


JOK\$/0

/ Features


±

/ Applications

/ Equivalent Circuit

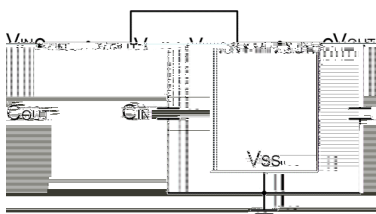

/ Pinning

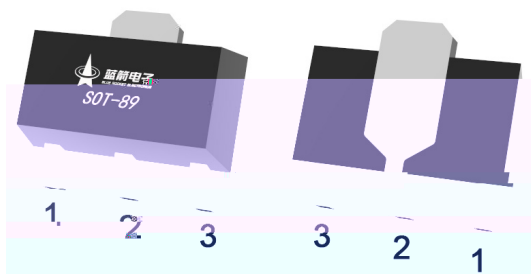






/ Marking

BRCO7533HT






DATA SHEET




/ Electrical Characteristic Curve

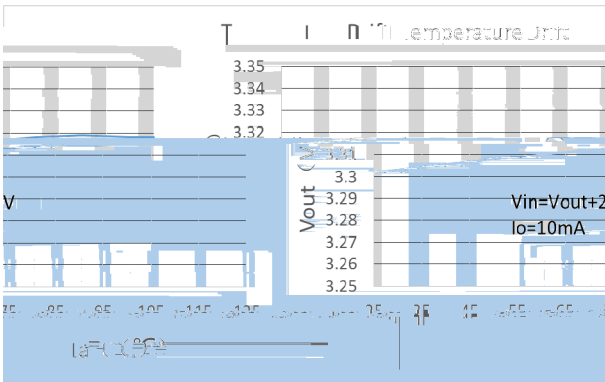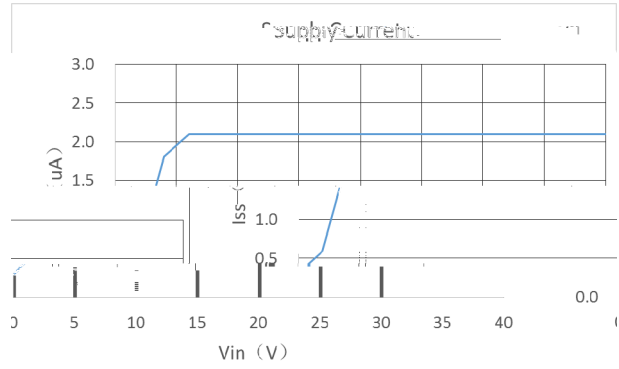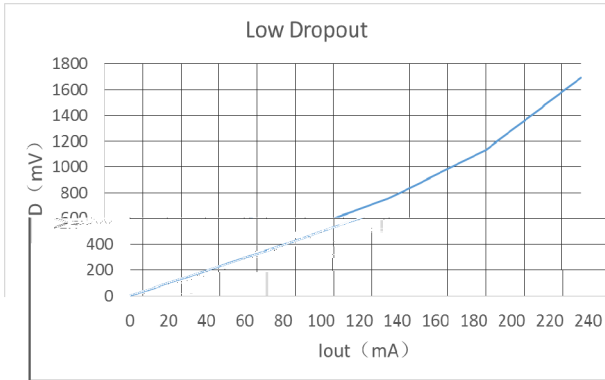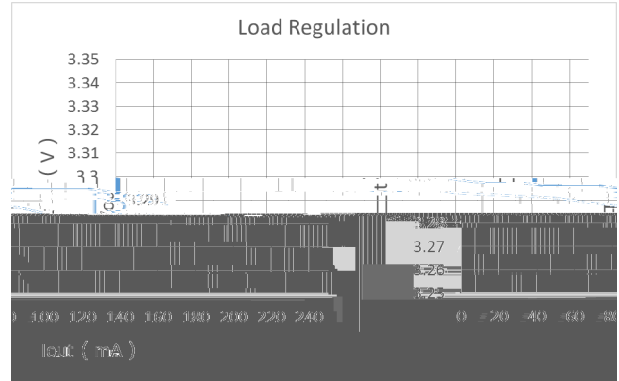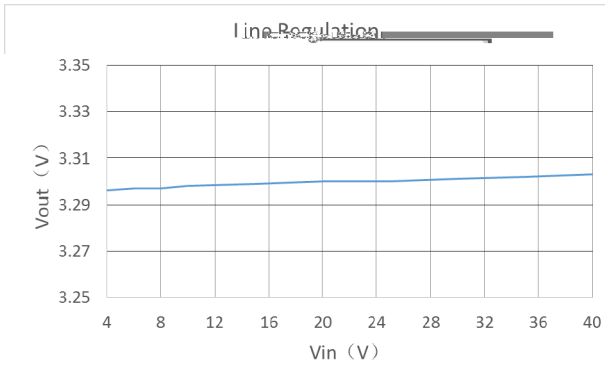

/ Typical Application Circuit

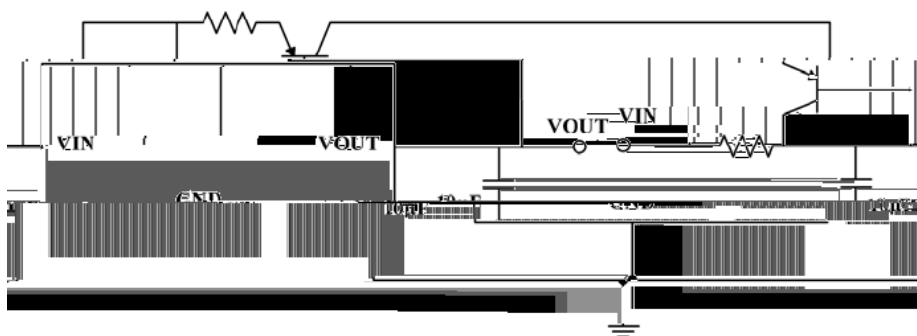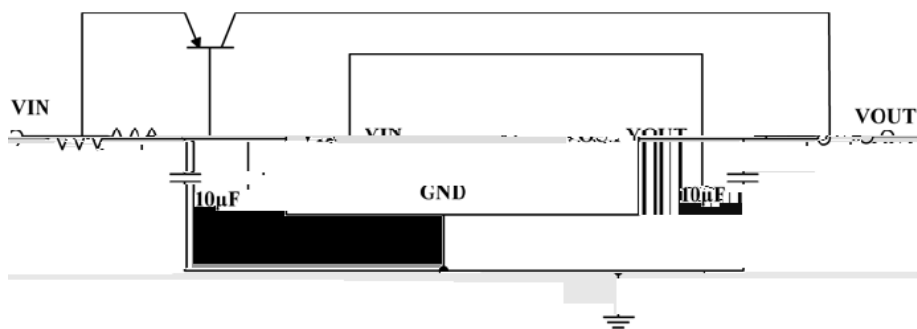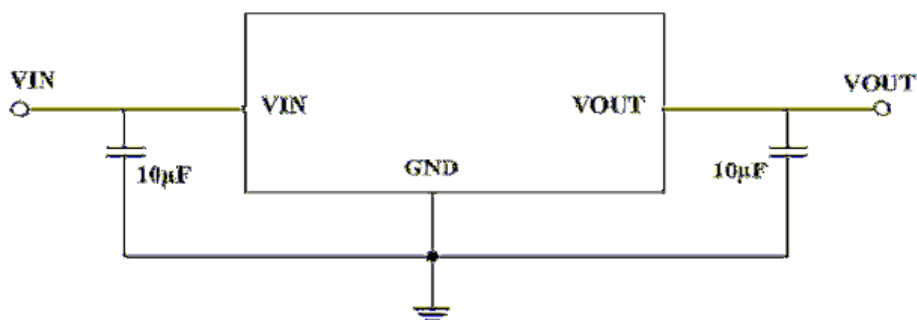



/ Typical Application Circuit

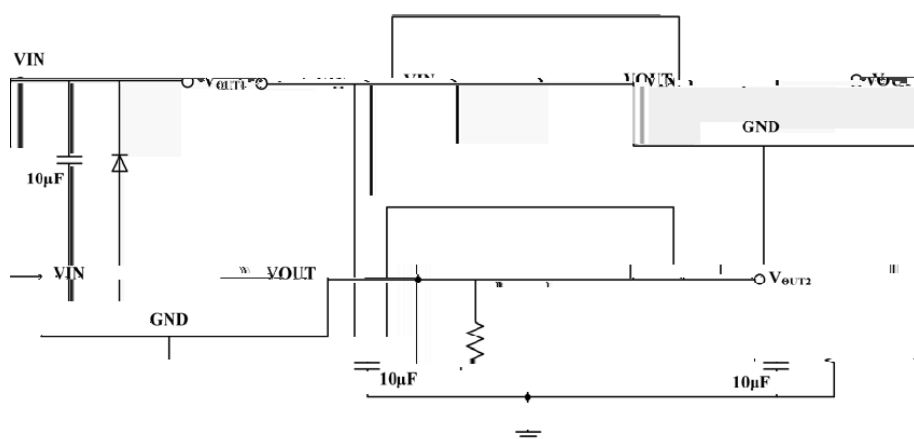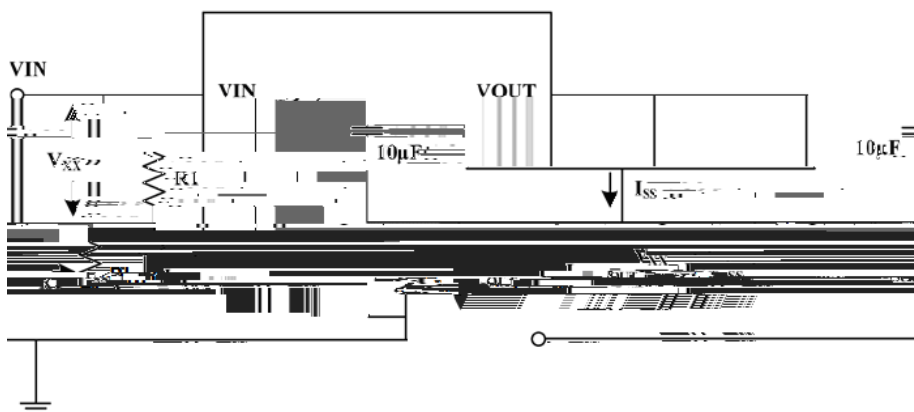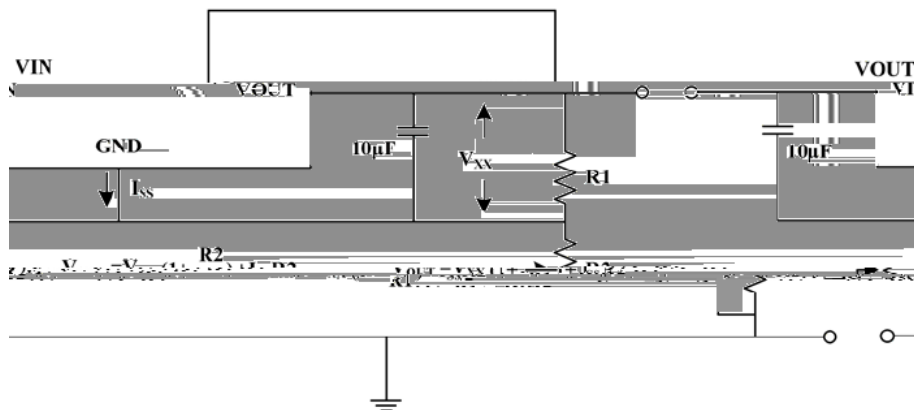

/ Package Dimensions

SUT-89

单位: mm

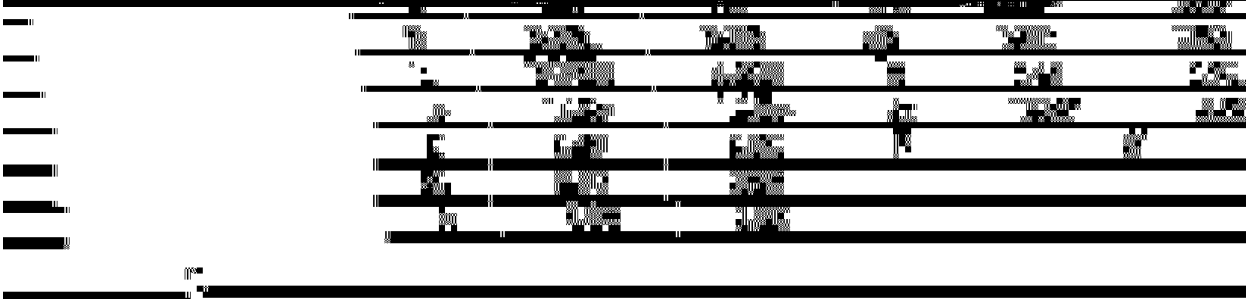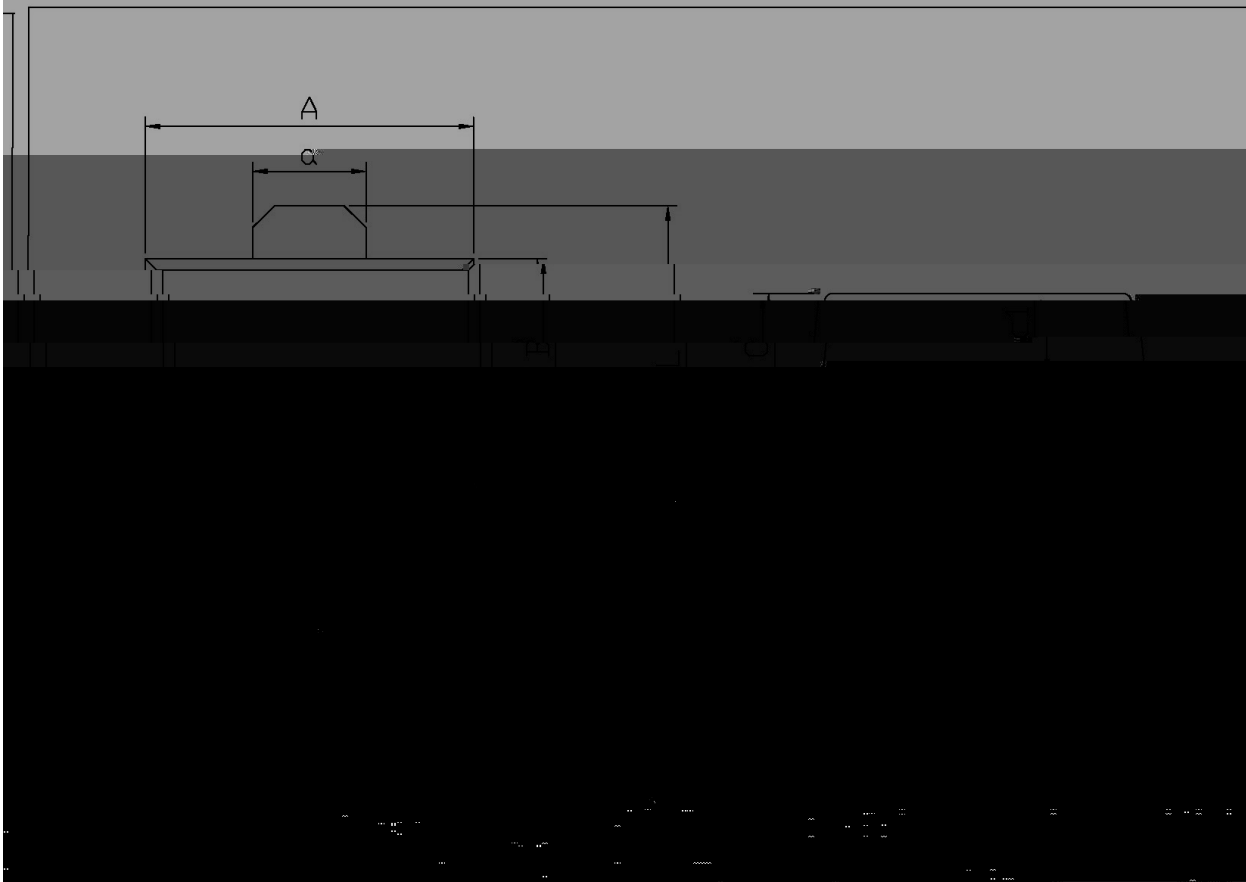

BRC07533HT



DATA SHEET

() / K\ d g\ i Xk i \ Gif] \ d] fi \ @ \ I \] dn \ Jfd \ i \ e ^ Ž G Y \$ = i \ \ ž

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.