




BRC5007N06SSL

		±	



BRC S007N06SSL

--	--	--	--	--	--

/ Electrical Characteristic Curve

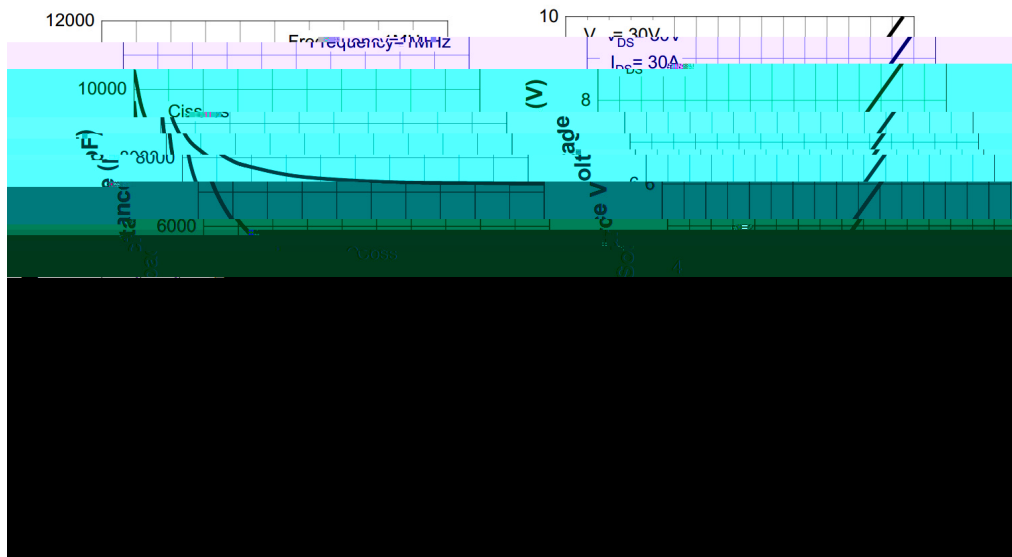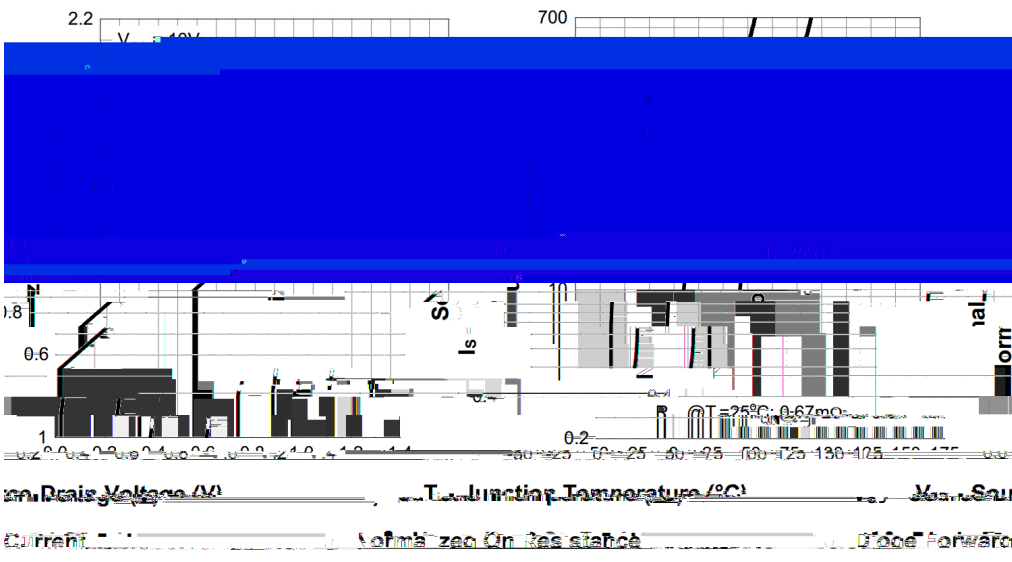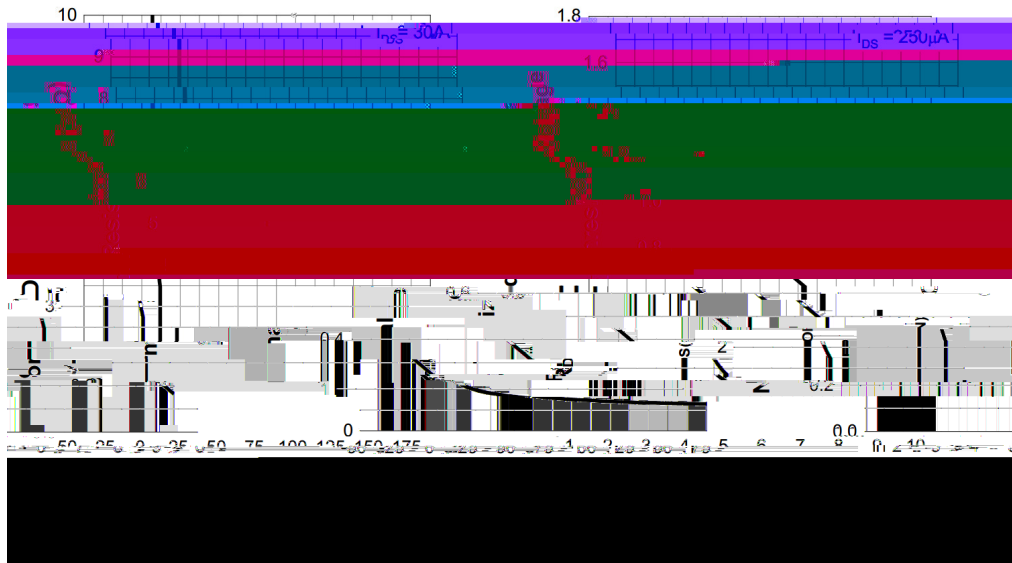


/ Package Dimensions

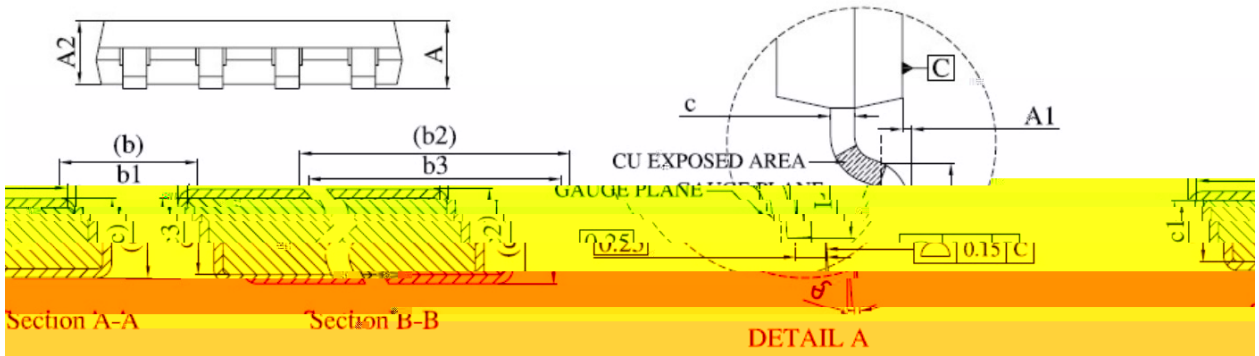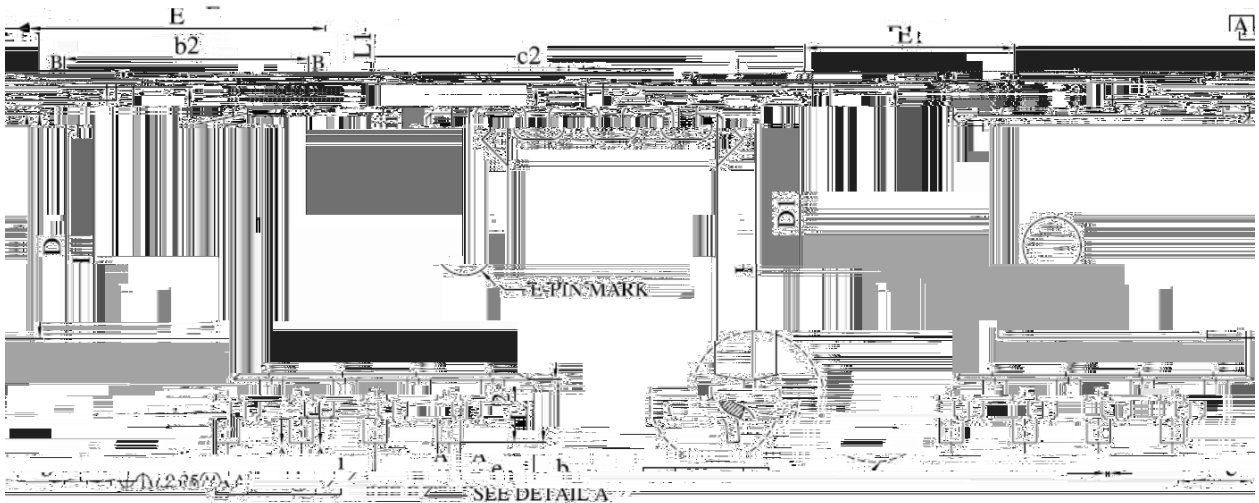

Dimensions in Millimeters				Dimensions in Millimeters			
Symbol	MIN.	MAX.		Symbol	MIN.	MAX.	
A1	0.00	0.15		E1	4.95	5.30	1.1
A2	0.98	1.12		e	1.27	BSC.	
b	0.35	0.50		H	5.95	6.25	
b1	0.33	0.46		∅	-	0.25	
b2	4.00	4.31		L1	0.70	0.70	
b3	4.00	4.37		L2	0.27	0.30	
c	0.19	0.25		∅	0.20	0.20	

/ Marking Instructions

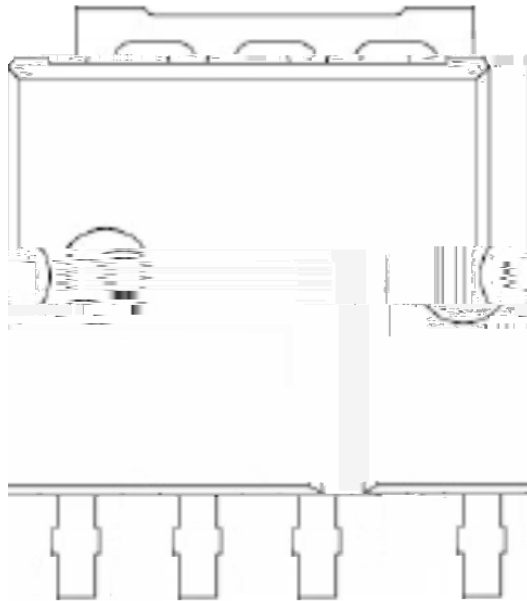

BR

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

--	--	--