

$G_i = E^2 \cdot 8 \$/C$ 'E D F J



 N-Channel Enhancement Mode Field Effect Transistor in a PDFN3² 3A-8L Plastic Package.

 $V_{DS} (V) = 30V$
 $I_D = 74A (V_{GS} = w 20V)$
 $R_{DS(ON)} @ 10V \quad 3.7mR (Typ. 3.5mR)$
 $R_{DS(ON)} @ 4.5V \quad 6.5mR (Typ. 4.5mR)$
 $8 <: \$H (' ($

HF Product.

Qualified to AEC-Q101 Standards for High Reliability,

Load Switch Applications, Battery Power Management, Meet the stringent requirements of automotive applications.


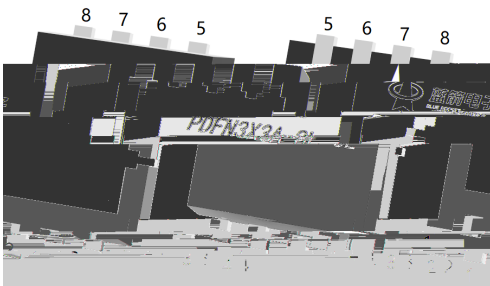



出脚	定义
Pin1	S
Pin2	G
Pin3	S
Pin4	S
Pin5	S
Pin6	S
Pin7	S
Pin8	S




See Marking Instructions.

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	30	V
Drain Current		$I_D(T_C=25^\circ\text{C})$	74	A
Drain Current - Pulsed		I_{DM}	185	A
Gate-Source Voltage		V_{GSS}	± 20	V
Single Pulsed Avalanche Energy		E_{AS}	449	mJ
Avalanche Current		I_{AS}	33.5	A
Power Dissipation		$P_D(T_C=25^\circ\text{C})$	35	W
Operating and Storage Temperature Range		T_J, T_{stg}	-55 to 150	
Junction-to-Ambient	$t = 10$	R_{JA}	42	/W
Junction-to-Ambient	Steady-State		78	
Junction-to-Case	Steady-State	R_{JC}	3.6	

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$	$I_D=250\mu A$	30	35		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=30V$	$V_{GS}=0V$			1	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$	$V_{DS}=0V$			± 0.1	μA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$	$I_D=250\mu A$	1.0	1.5	3.0	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$	$I_D=20A$		3.5	3.7	m
		$V_{GS}=4.5V$	$I_D=10A$		4.5	6.5	m
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$	$I_S=1A$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $f=1.0MHz$	$V_{GS}=0V$		2750		pF
Output Capacitance	C_{oss}				380		
Reverse Transfer Capacitance	C_{rss}				240		
Gate resistance	R_g	$V_{GS}=0V$ $f=1MHz$	$V_{DS}=0V$		2.6		
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=10V$ $I_D=20A$	$V_{DS}=15V$		80		nC
Total Gate Charge	$Q_{g(4.5V)}$				35		
Gate Source Charge	Q_{gs}				13		
Gate Drain Charge	Q_{gd}				13		
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $R_L=0.75$	$V_{DS}=15V$ $R_{GEN}=3.0$		6.7		ns
Turn-On Rise Time	t_r				3.8		
Turn-Off Delay Time	$t_{d(off)}$				32		
Turn-Off Fall Time	t_f				5.2		

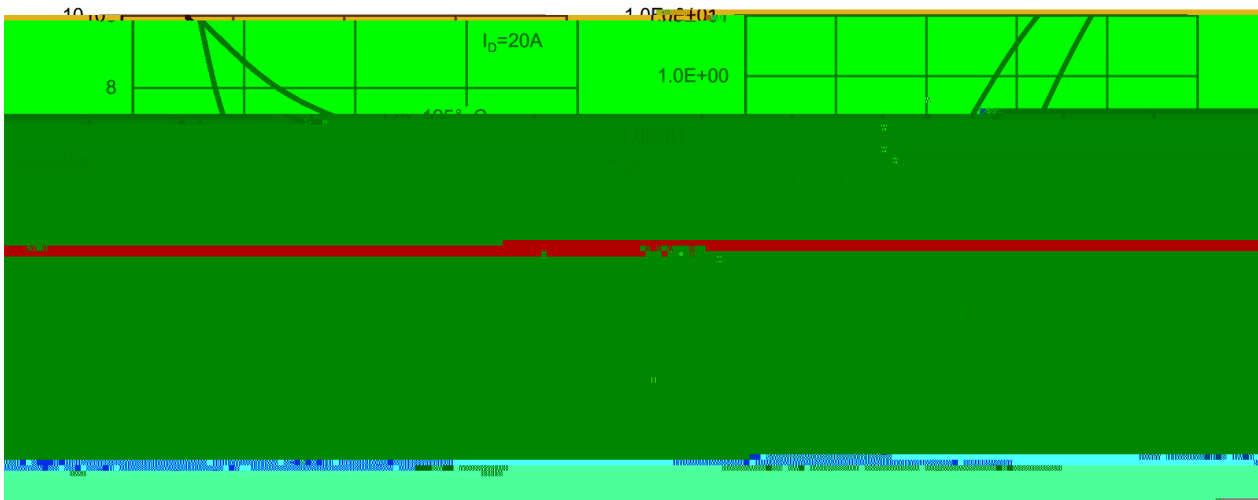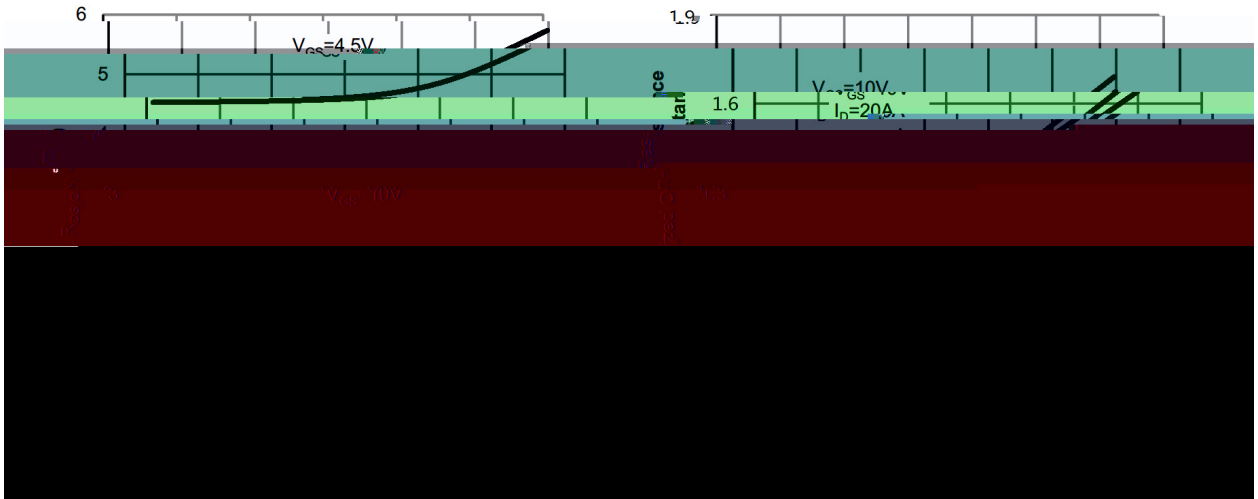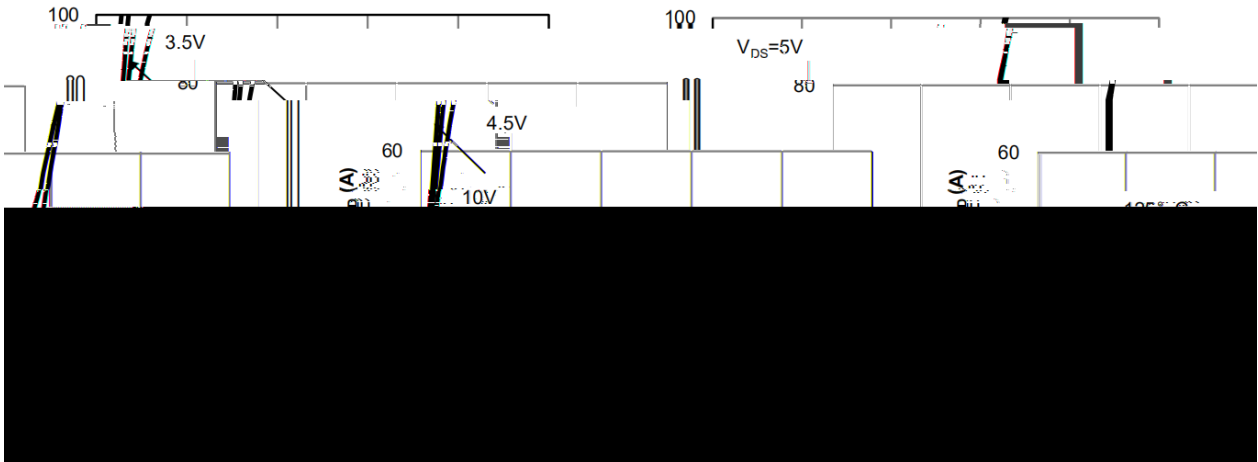


/

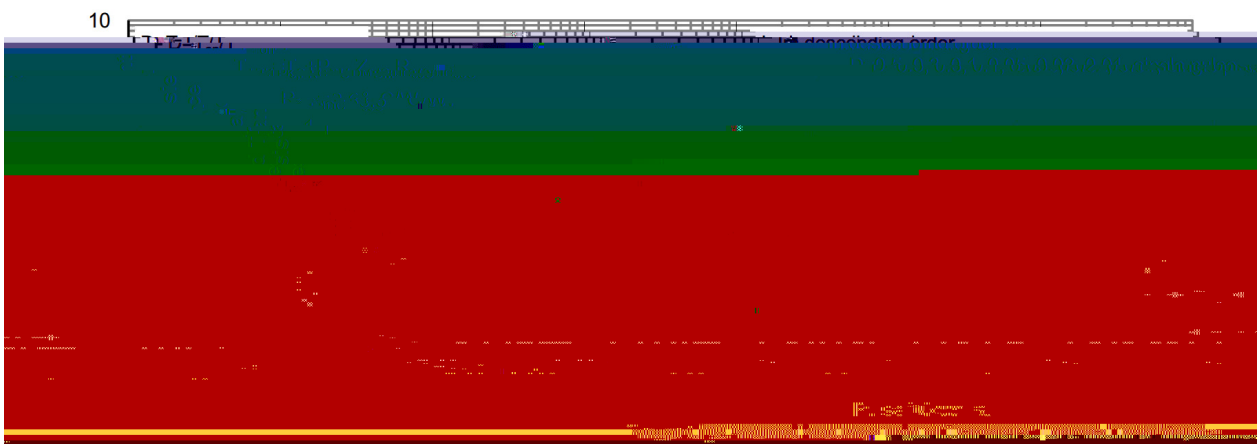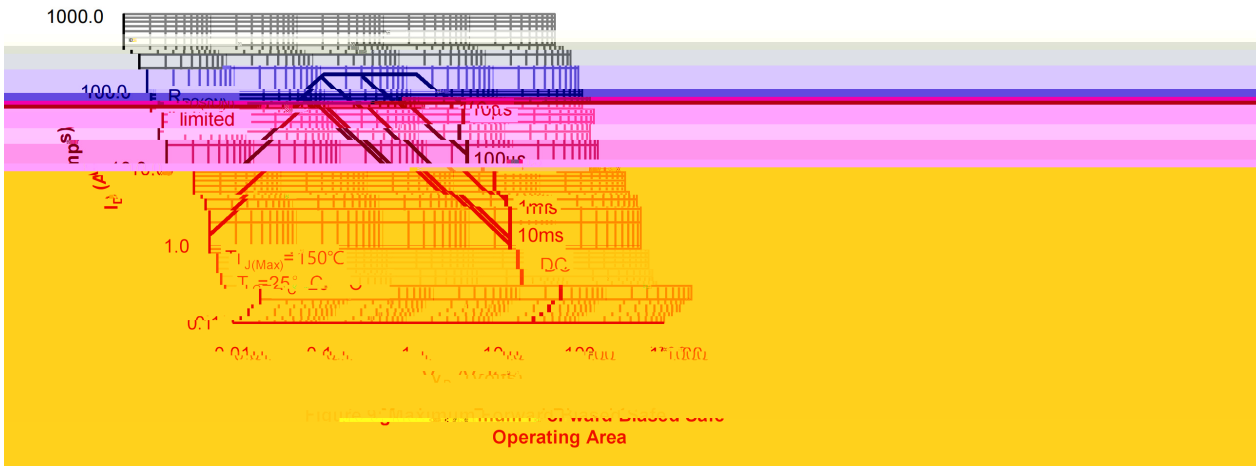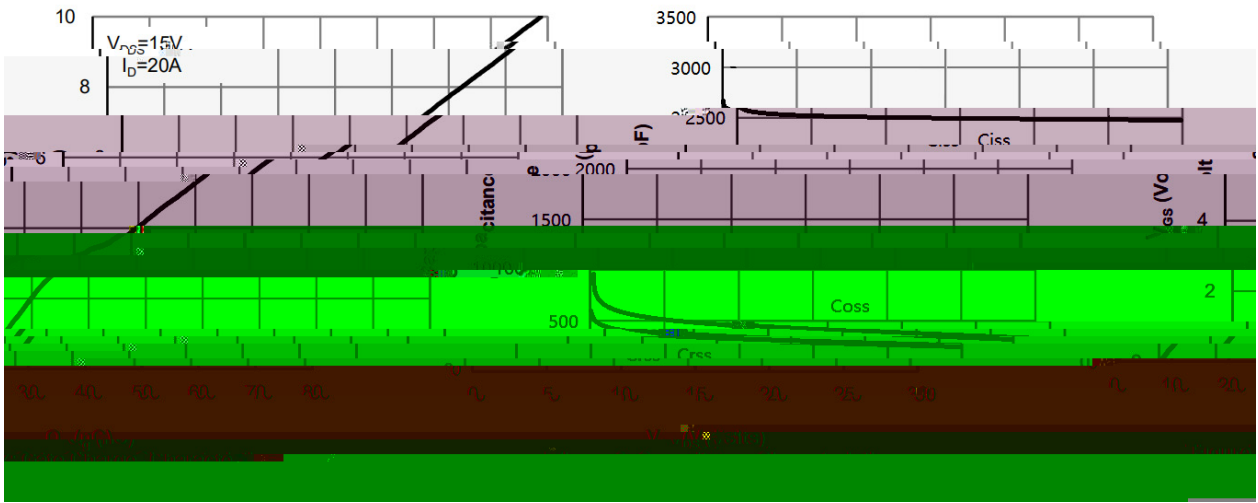

/

PDFN3X3A-8L

Unit:mm

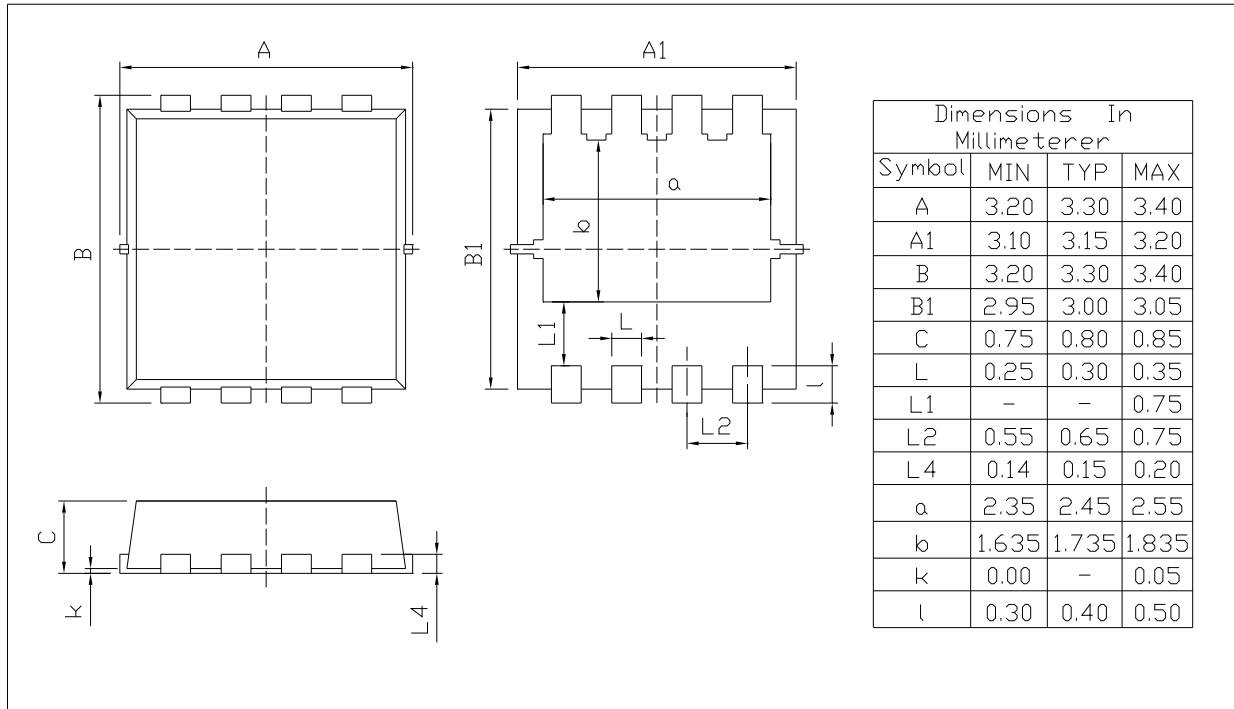

Rev.00 202011



BR

Q

035N03

!!!!


Note:

BR: Company Code

Q: Automobile halogen-free product Code

035N03: Product Type Code

****: Lot No. Code, code change with Lot No

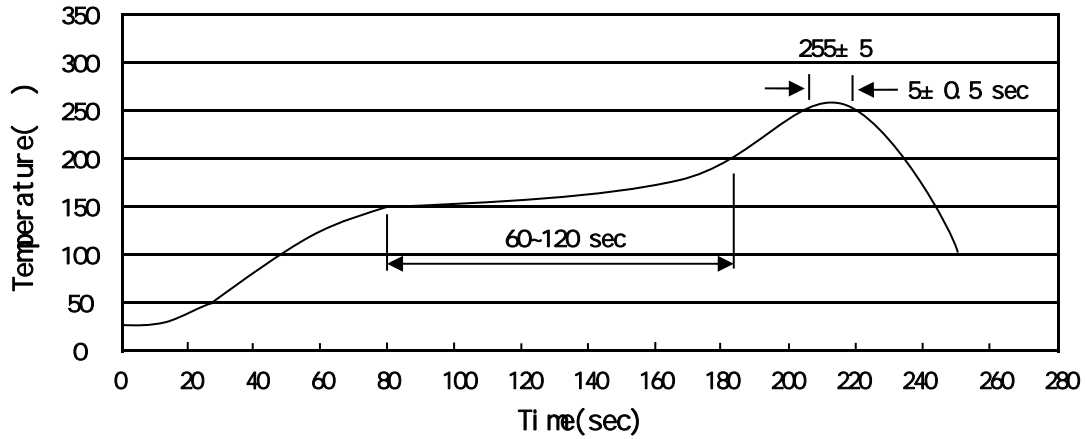Temperature Profile for IR Reflow Soldering(Pb-Free)


Note:

- | | | | | | |
|---|--------|-----|------------|---------|---|
| 1 | 150 | 200 | 60 | 120sec; | 1.Preheating:150~200 , Time:60~120sec. |
| 2 | 255..5 | | 5..0.5sec; | | 2.Peak Temp.:255..5 , Duration:5..0.5sec. |
| 3 | | 2 | 10 /sec. | | 3. Cooling Speed: 2~10 /sec. |

260..5

10..1 sec.

Temp.:260..5

Time:10..1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
PDFN3x3A-8L	5,000	2	10,000	6	60,000	13 x12	360x360x50	380x335x366