





8<: \$H(' (L ðiX`Cf n `F e\$ \j`j kXeZ\#Xj k`j n `kZ_`e^#Hl Xc]\`k f `8<: \$H(' (`JKXe[Xi[j `]f i `? `^_`l \cXY`ckp# ? =`Gif [l Zk%

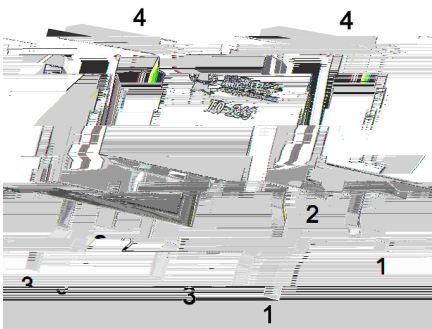

9D J



		±	




BRCS035N10SHBDQ



蓝箭电子
BLUE ROCKET ELECTRONICS


DATA SHEET

/ Electrical Characteristic Curve

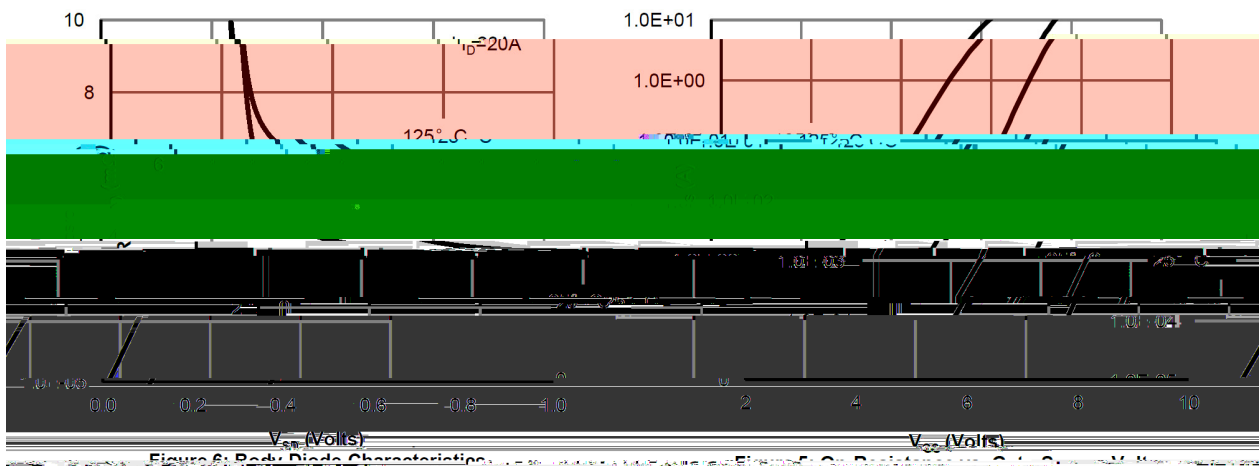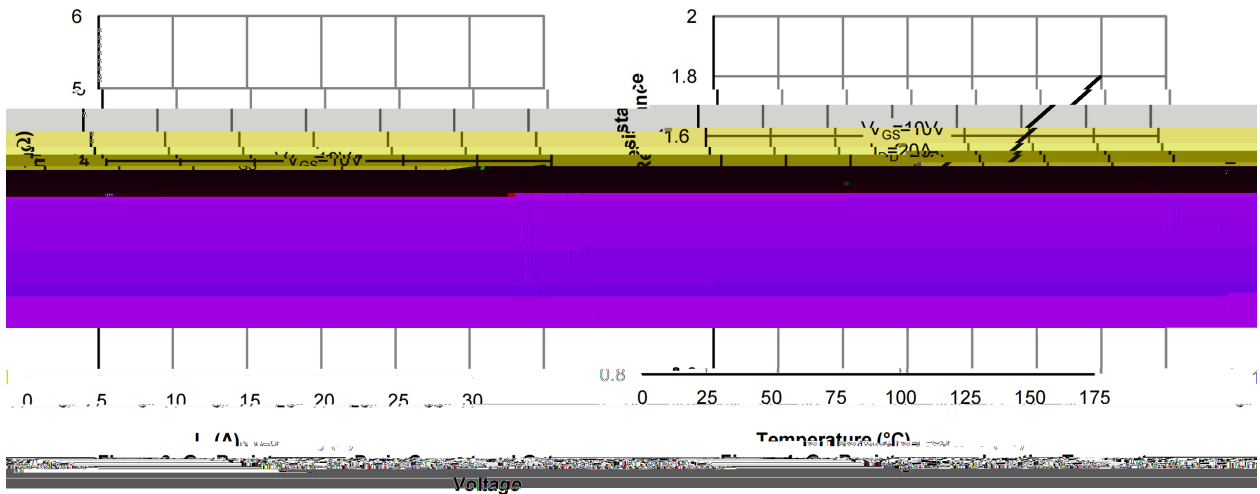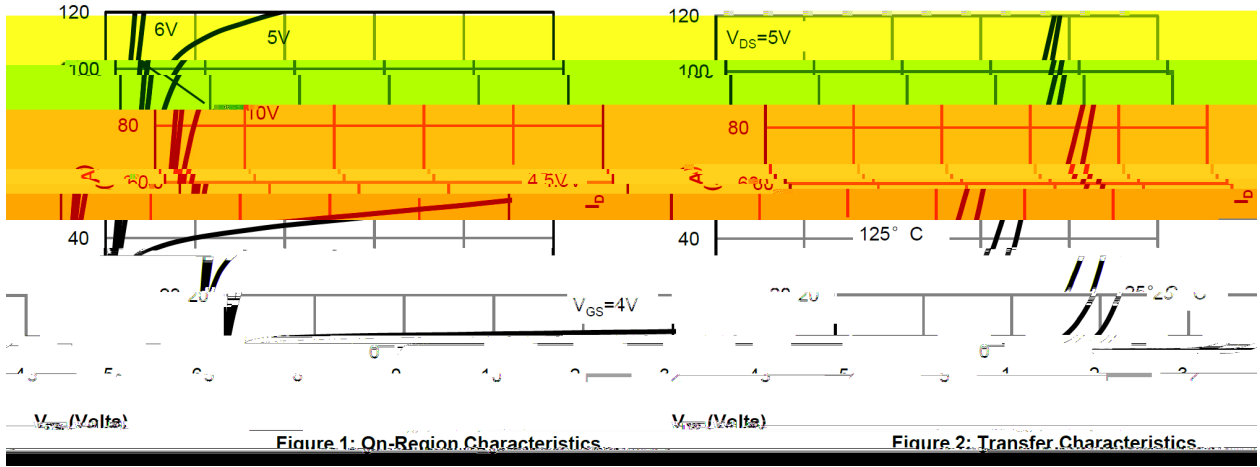

BRCS035N10SHBDQ


/ Package Dimensions

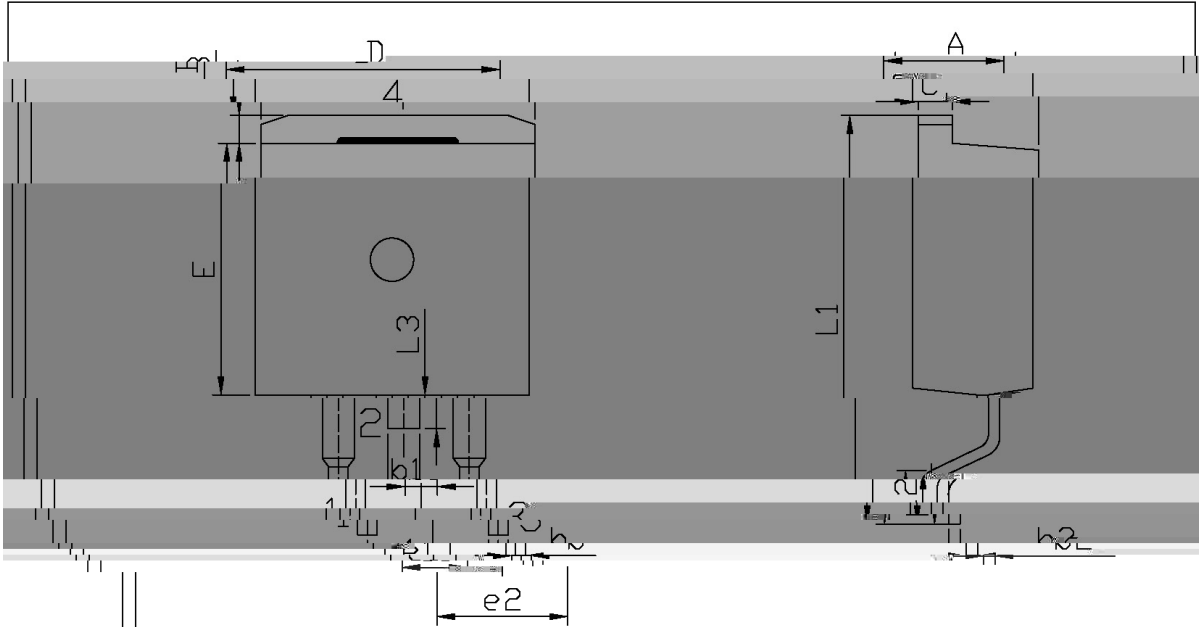

单位: mm

Dimensions	Min	Max	Dimensions	Min	Max
A	4.30	4.70	E _L	0.00	0.10
D	1.00	1.40			

/ Marking Instructions

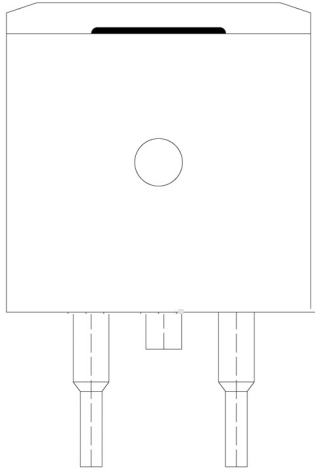

91

'*, E (' J?

!!!!

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

... ..

/ Resistance to Soldering Heat Test Conditions

...