

BRCS035N10SHZCQ

Rev.A Jun.-2022



DATA SHEET

/ Descriptions

N-Channel MOSFET in a PDFN5x6 Plastic Package.


/ Features

Low $R_{DS(ON)}$ to minimize conductive I_{loss} ; low Gate Charge for fast switching; Low Thermal resistance; Qualified to AEC-Q101 Standards for High Reliability; HF Product.


/ Applications

Battery Management, High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA, Networking DC-DC Power System, Load Switch, Meet the stringent requirements of automotive applications.

/ Equivalent Circuit



/ Pinning

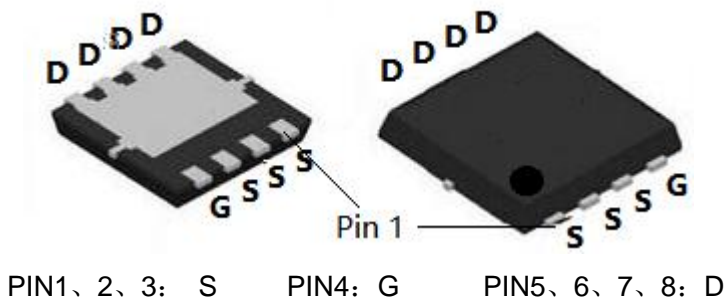

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking

See Marking Instructions.

BRCS035N10SHZCQ

Rev.A Jun.-2022

DATA SHEET

<http://>

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $R_L=2.5\ \Omega$		19		ns
		$V_{DS}=50V$ $R_{GEN}=3\ \Omega$				S =3
		d()				

BRCS035N10SHZCQ

Rev.A Jun.-2022

DATA SHEET

BRCS035N10SHZCQ

Rev.A Jun.-2022



DATA SHEET

/

/ Marking Instructions

BR

Q

035N10SH

Note:

BR: Company Code

Q:

BRCS035N10SHZCQ

Rev.A Jun.-2022

DATA SHEET