

5 Ø / Descriptions

.> // x ?œ 3 « | o


/ " / Features

8* 9 u4 k y > z k) x y4 k ... , %œ k)í D }o


— ÷ / Applications

9 z 9 t ò y V æ tœ *) *) ô Eo ' D } ä | ô Eo

^ W] Ô• / Equivalent Circuit



Û- æ / Pinning

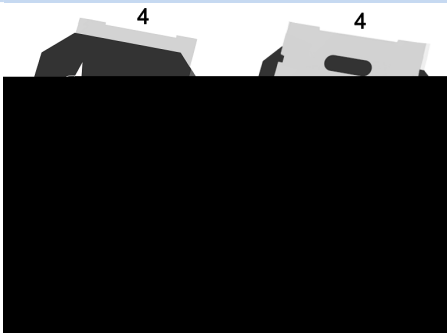

y

y

y

y

, M V / Marking

- ~ " ¢o

Electrical Characteristics (Ta=25 ;)

@	Z	y i Ú^	´ 4	` "	´ Ý	% y
		i i				

Electrical Characteristic Curve

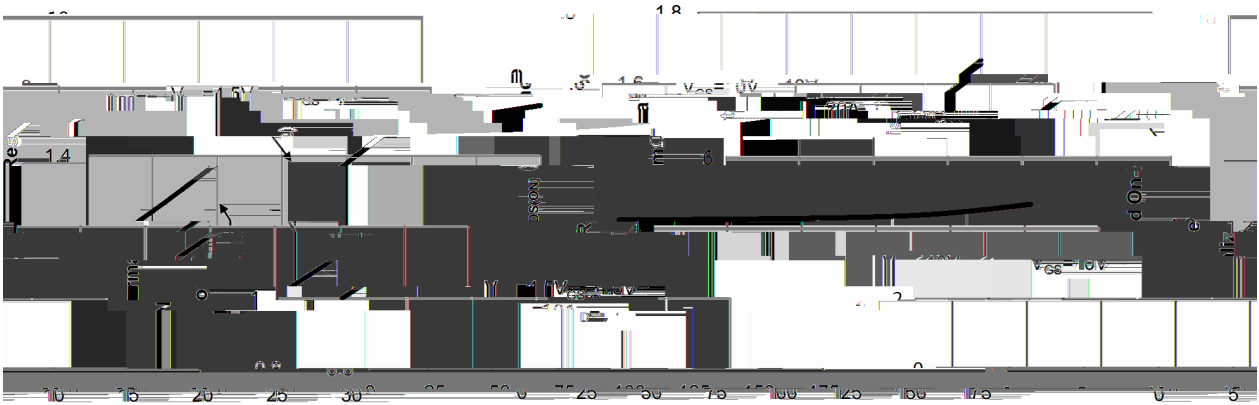
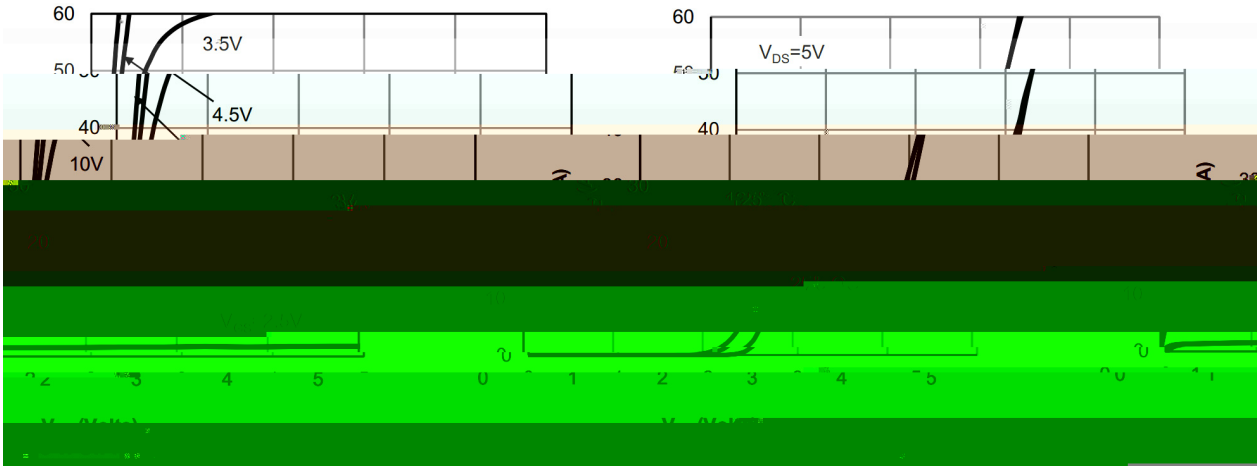


Figure 4-20 Drain-Source Saturation Voltage vs. Temperature





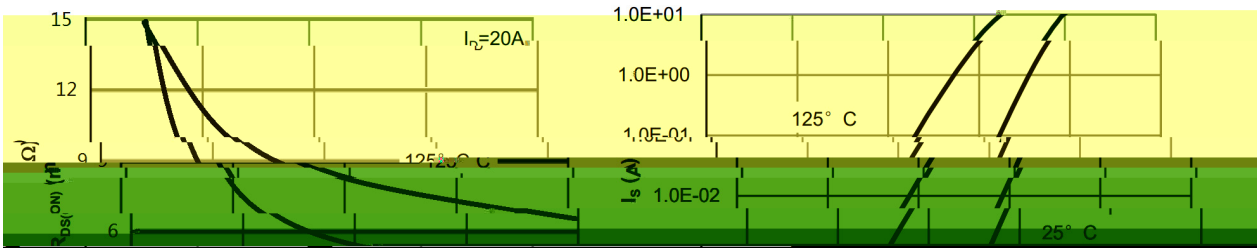


Figure 4-21 Drain-Source Saturation Voltage vs. Temperature

Electrical Characteristic Curve

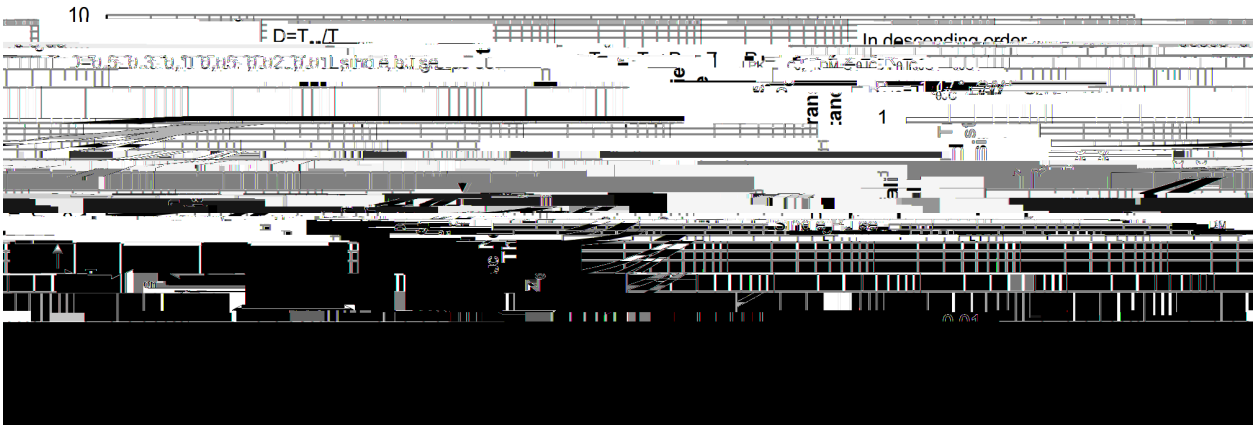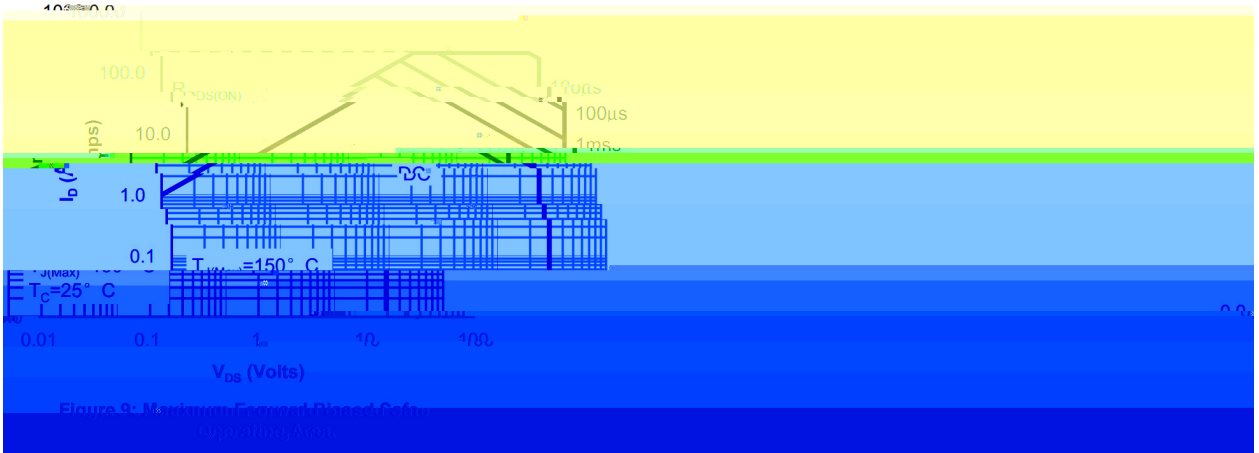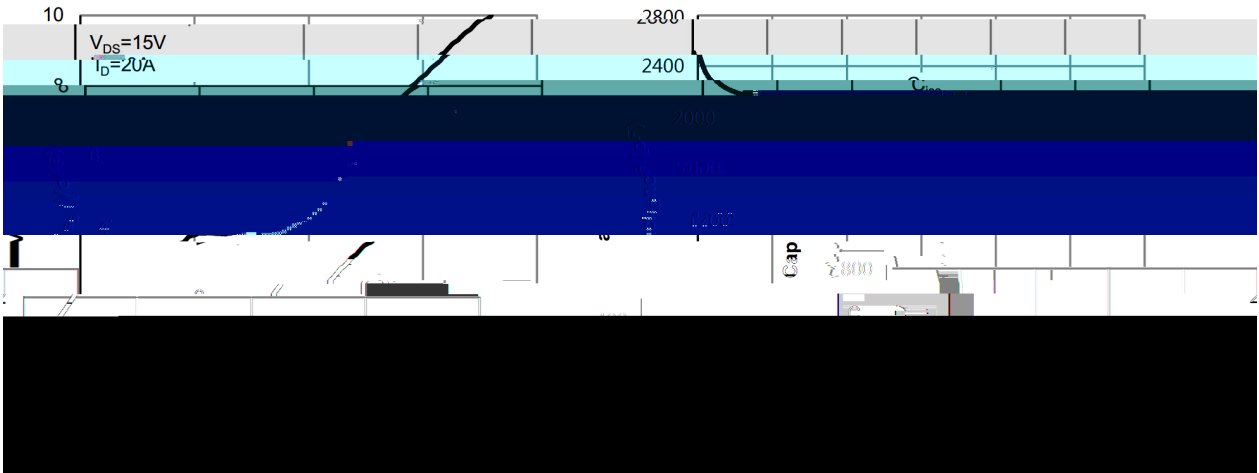

Ø/) ☉ / Package Dimensions

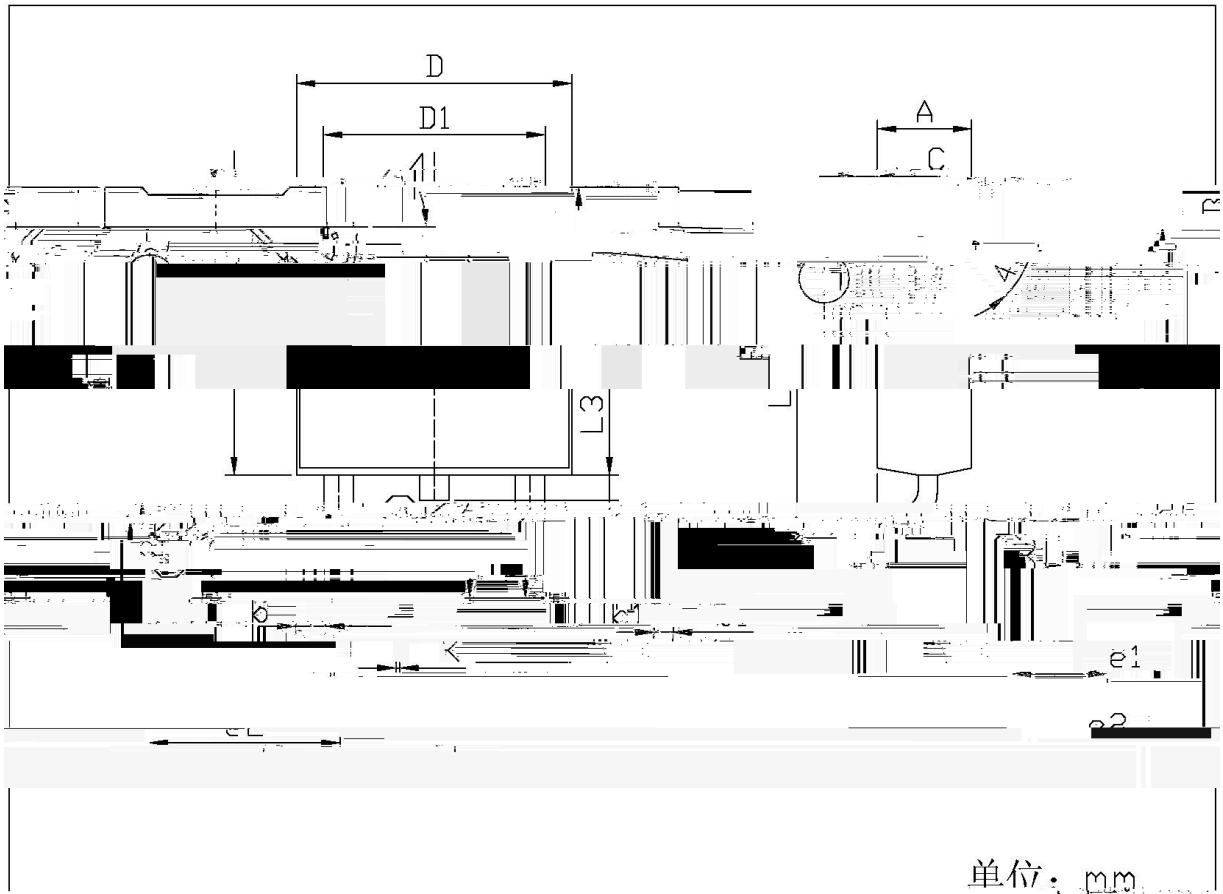


单位: mm

Dimensions		Millimeters		Dimensions		In Millimeters	
Min	Max	Symbol	Min	Max	Symbol	Min	Max
0.25	0.25	A	0.98	1.00	B	0.95	1.00
0.70	0.70	C	2.24	2.34	e1	2.24	2.34
0.55	0.55	D	0.85	0.85	e2	0.85	0.85
0.45	0.45	D1	5.10	5.50	L3	0.60	0.60
0.10	0.10	CL	5.10	5.50	CL	0.60	0.60

TO-252

, M y / Marking Instructions

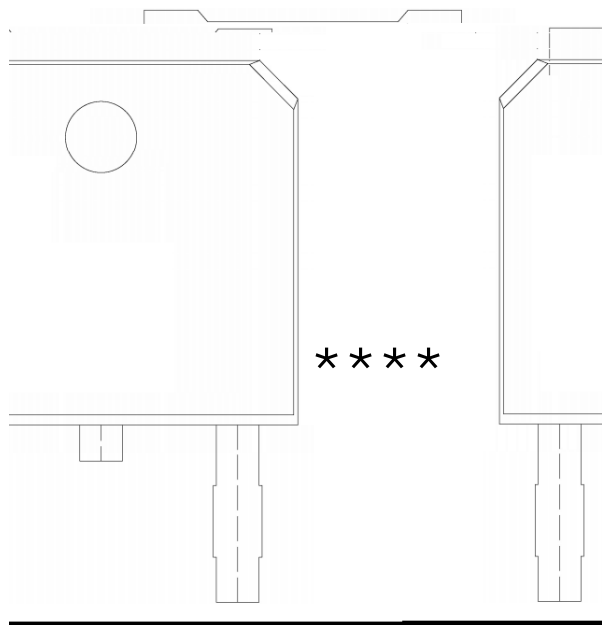

" ¢ y
 y , [W A
 y " Z W A
 y ŷD Z W A k ŷD Z J

BRCS050N03DP