

BRCS050N04YBQ

Rev.A Jan.-2024

BRCS050N04YBQ

Rev.A Jan.-2024



DATA SHEET

Parameter		Symbol	Rating	Unit
Drain-Source Voltage		V_{DSS}	40	V
Drain Current		$I_D(T_C=25^\circ\text{C})$	57	A
Drain Current - Pulsed		I_{DM}	137	A
Gate-Source Voltage		V_{GSS}	± 20	V
Single Pulsed Avalanche Energy		E_{AS}	583.2	mJ
Avalanche Current		I_{AS}	27	A
Power Dissipation		$P_D(T_C=25^\circ\text{C})$	30	W
Operating and Storage Temperature Range		T_J, T_{stg}	-55 to 150	
Junction-to-Ambient	$t \leq 10$	R_{JA}	40	/W
Junction-to-Ambient	Steady-State		75	
Junction-to-Case	Steady-State	R_{JC}	4.2	

BRCS050N04YBQ




Rev.A Jan.-2024



DATA SHEET

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250 A$	40	43		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=40V$ $V_{GS}=0V$			1	A
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 0.1	A
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250 A$	1.0	1.7	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=20A$		4.5	5	m
		$V_{GS}=4.5V$ $I_D=10A$		6.2	10	m
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=1A$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		1300		pF


/ Electrical Characteristic Curve

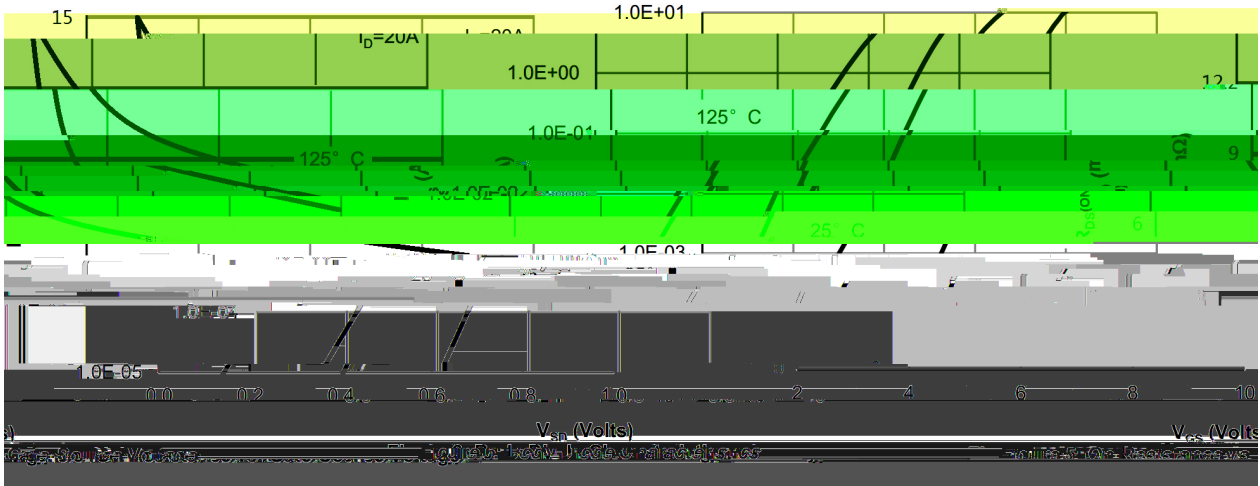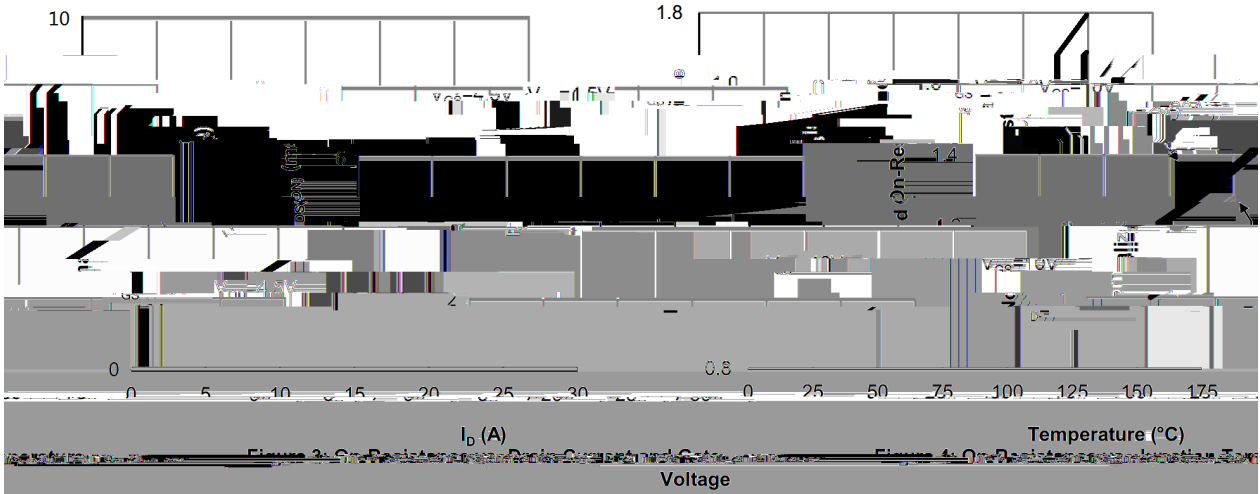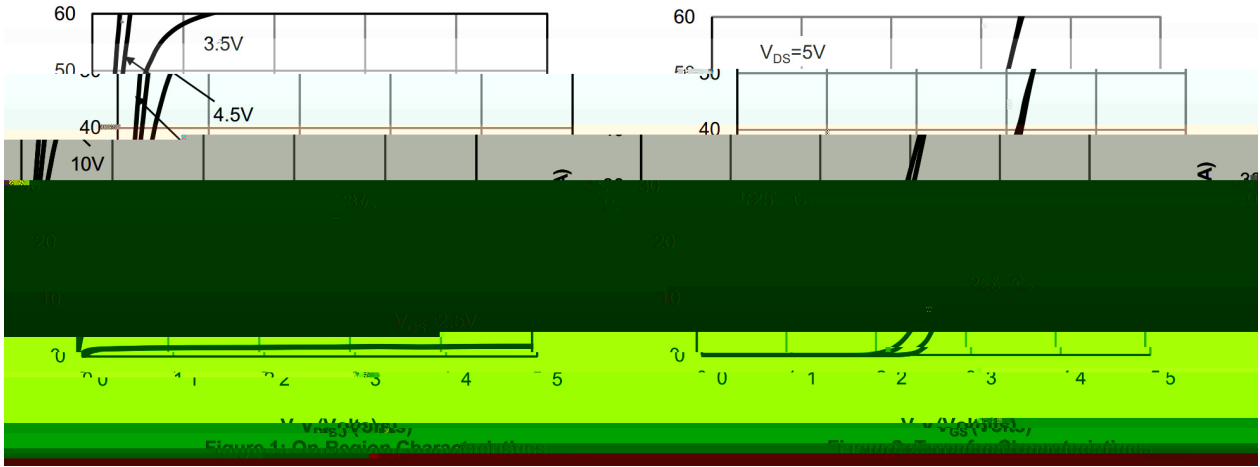

/ Package Dimensions


PDFN3X3A-8L

Unit:mm

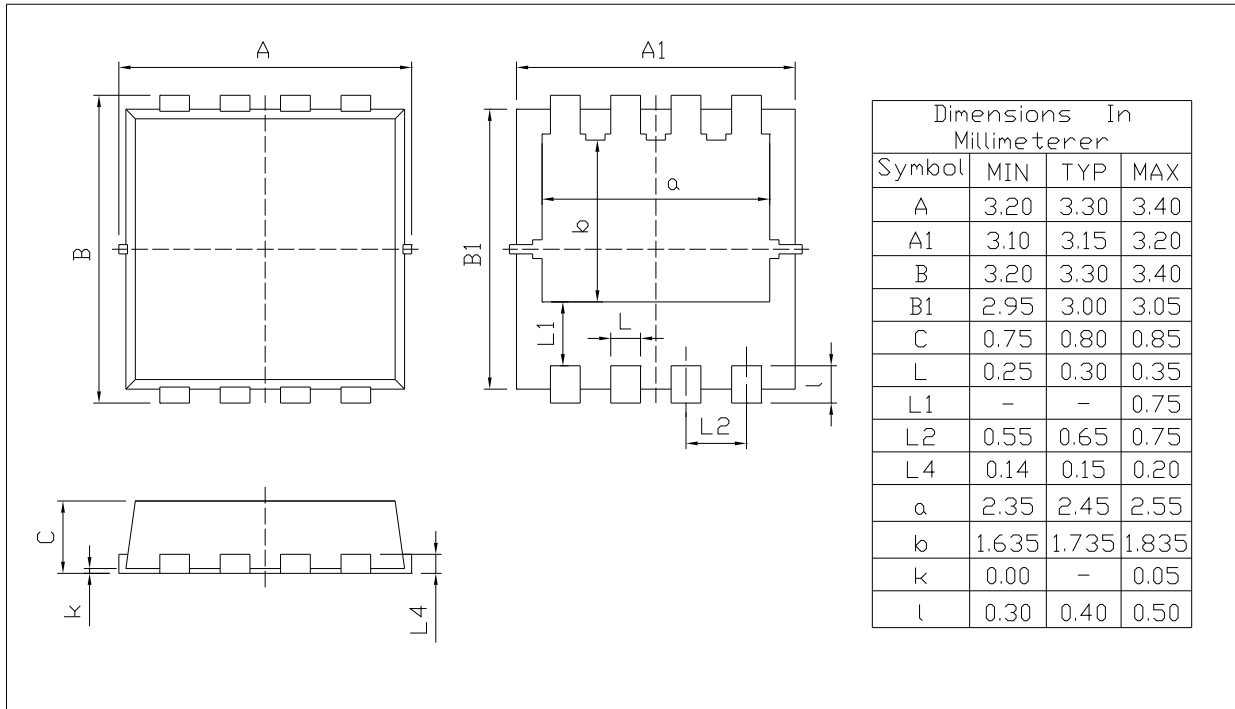

Rev.00 202011

/ Marking Instructions

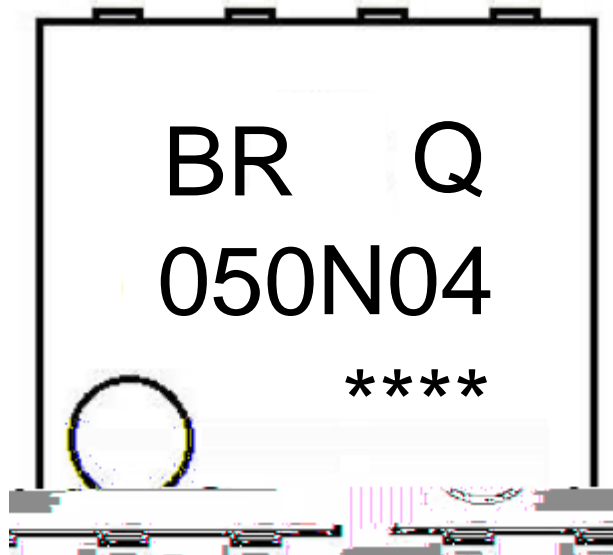

BR

Q

050N04

Note:


BR: Company Code

Q: Automobile halogen-free product Code

050N04: Product Type Code

****: Lot No. Code, code change with Lot No

() /

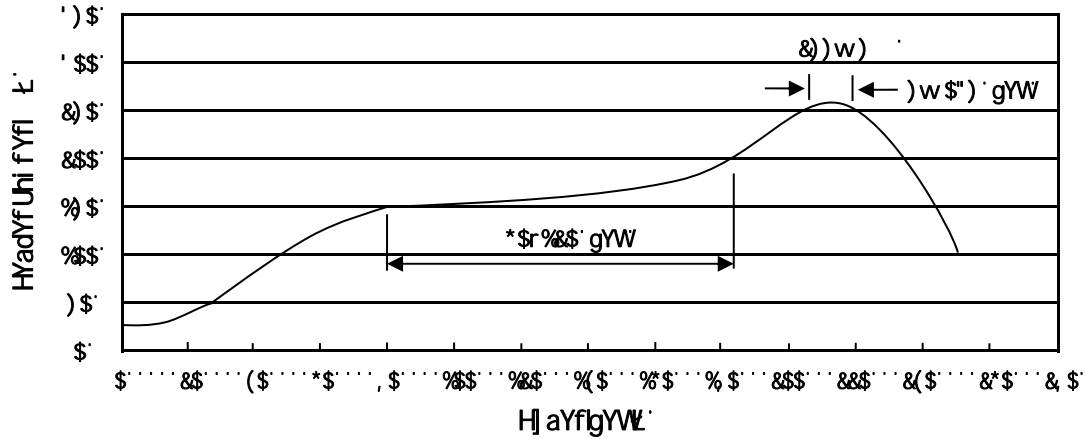

Note:

- 1 150 200 60 120sec; 1.Preheating:150~200 , Time:60~120sec.
- 2 255±5 5±0.5sec; 2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3 2 10 /sec. 3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
PDFN3x3A-8L	5,000	2	10,000	6	60,000	13 x12	360x360x50	380x335x366

/ Notices