




22.

--	--	--	--	--



N MOS


VDS (V) = 30V

ID =67A (VGS = ±20V)

RDS(ON)@10V≤6mR

HF Product.

DC/DC






	i_c		
	i_c		
			$^{\circ}C$
			i_c

B









Tr 00.564 0 000.564 0 015.3415

B




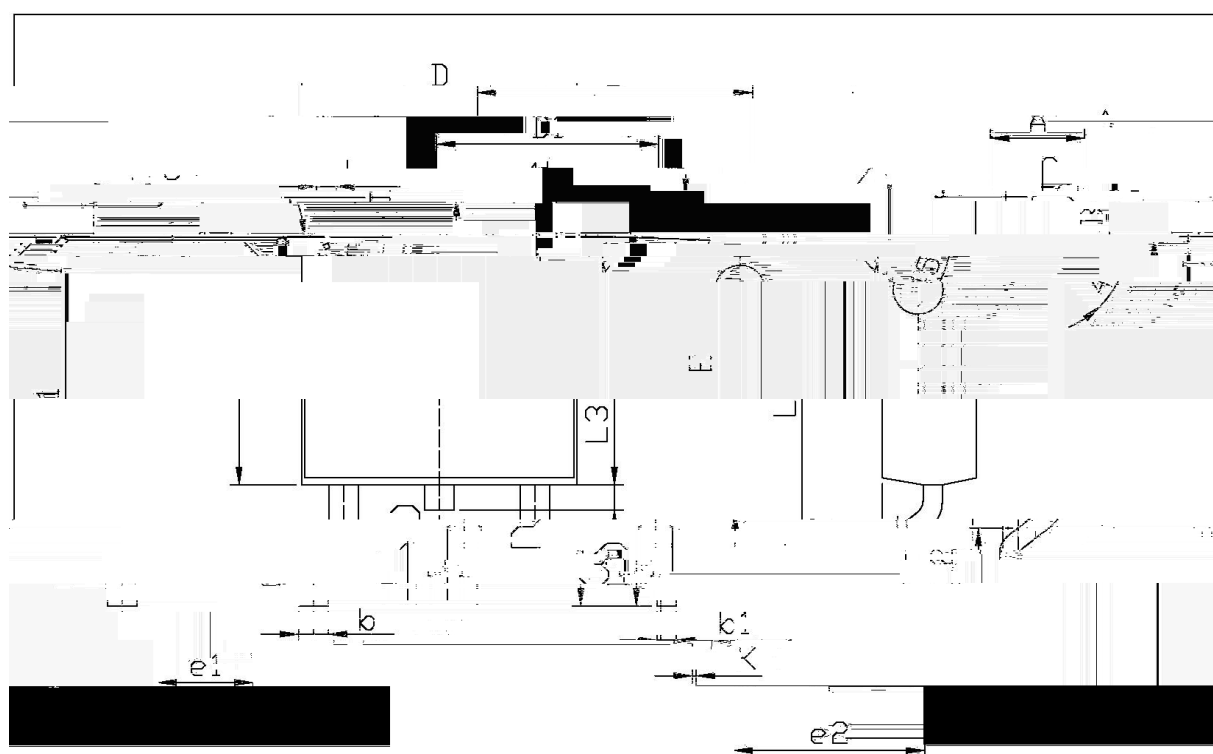

TT-252

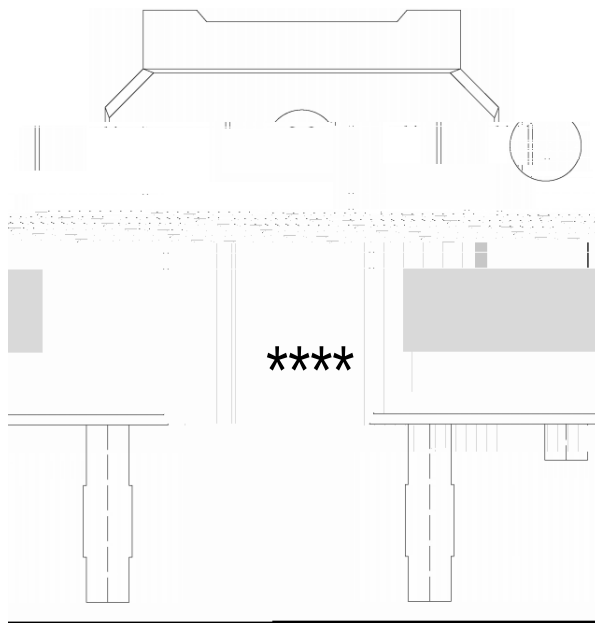

060N03




Temperature Profile for IR Reflow Soldering(Pb-Free)

±

±

±


±



±

±

°C



	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube	Inner Box	Outer Box
TO-251/252	75	28	2,000	5	13,000	526×20.5×5.25	555×164×50	575×290×180

