

/ Descriptions


×

×


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

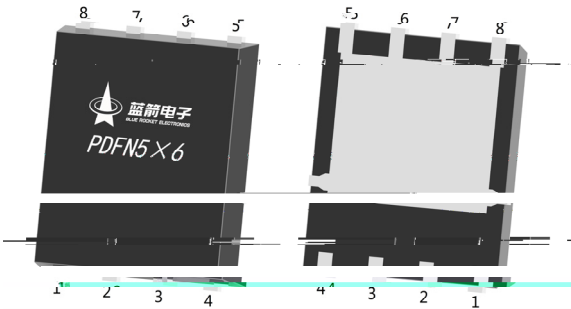

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking




			±	
	≤	θ		
		θ		

					±	
						Ω

/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

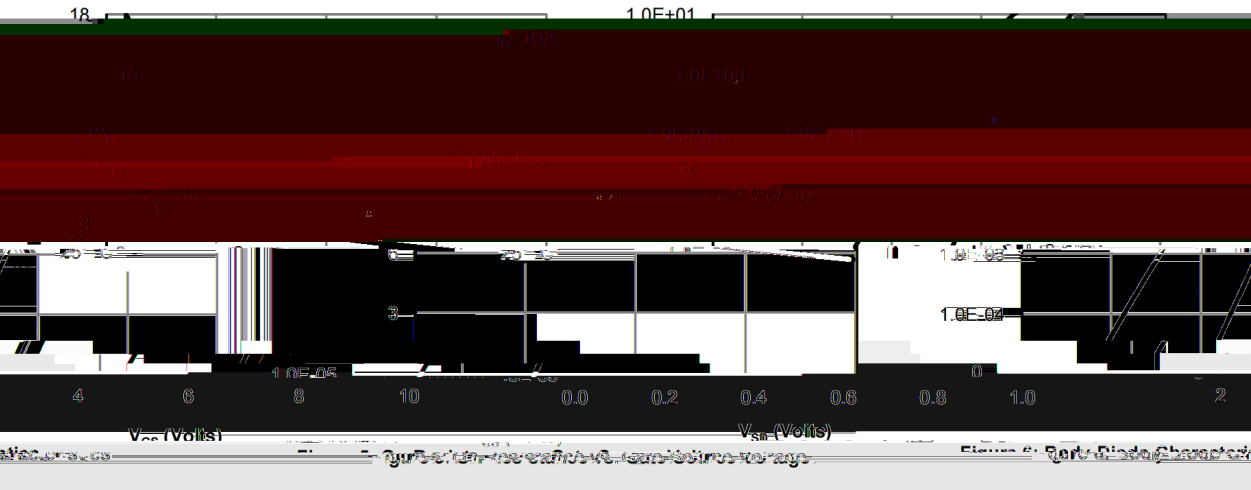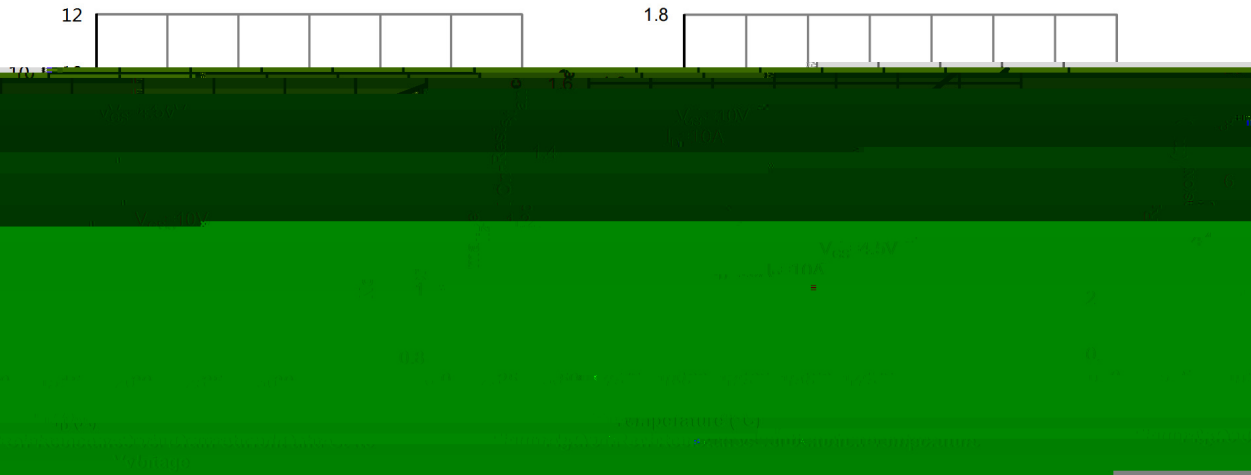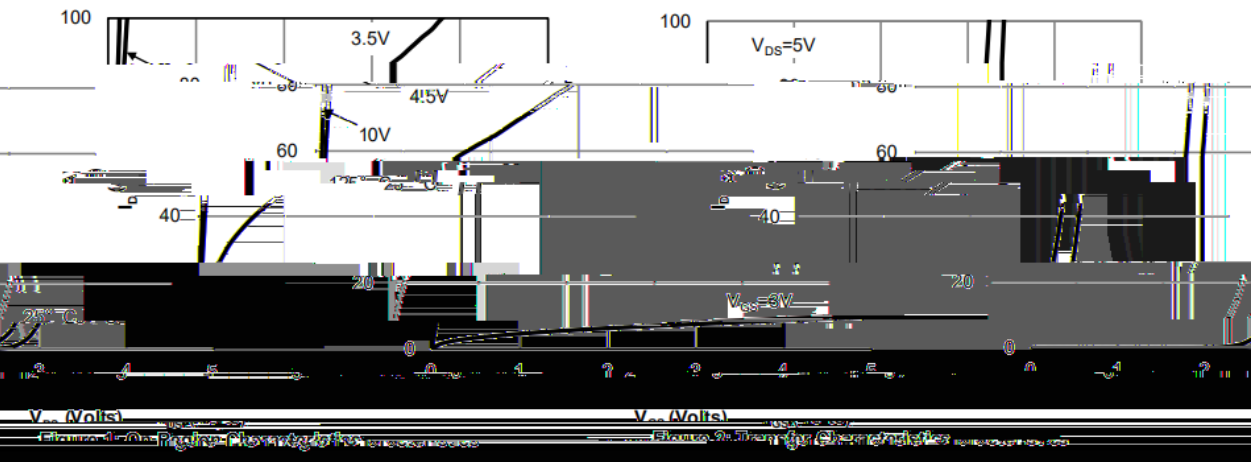

/ Electrical Characteristic Curve

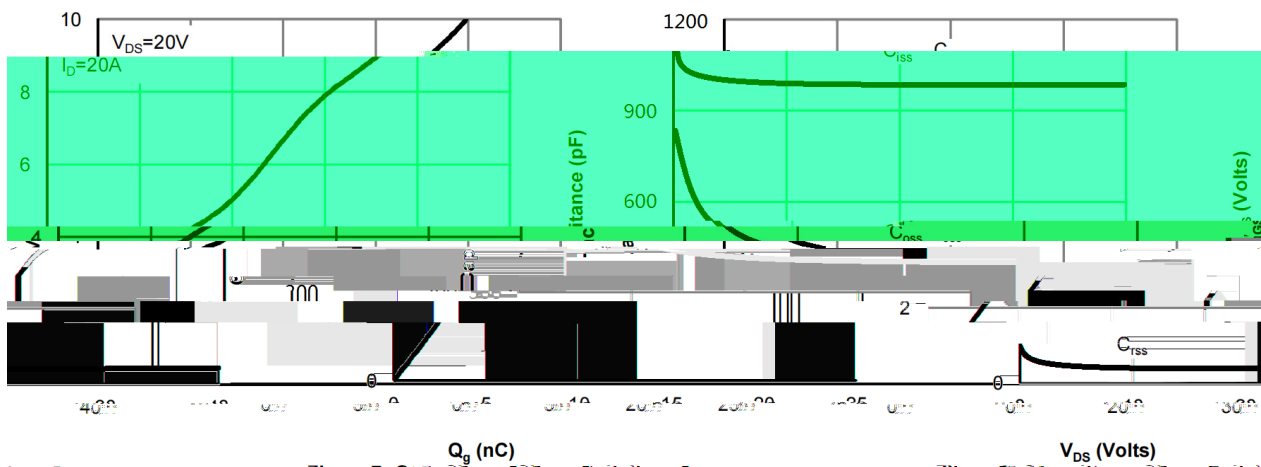


Figure 7: Capacitance Characteristics

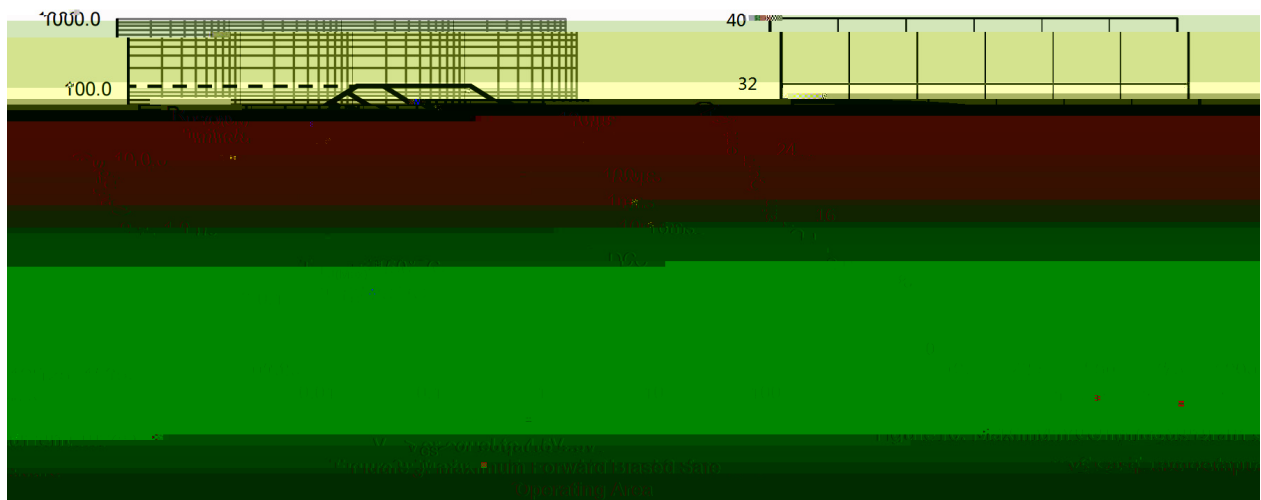


Figure 8: Gate Charge Characteristics


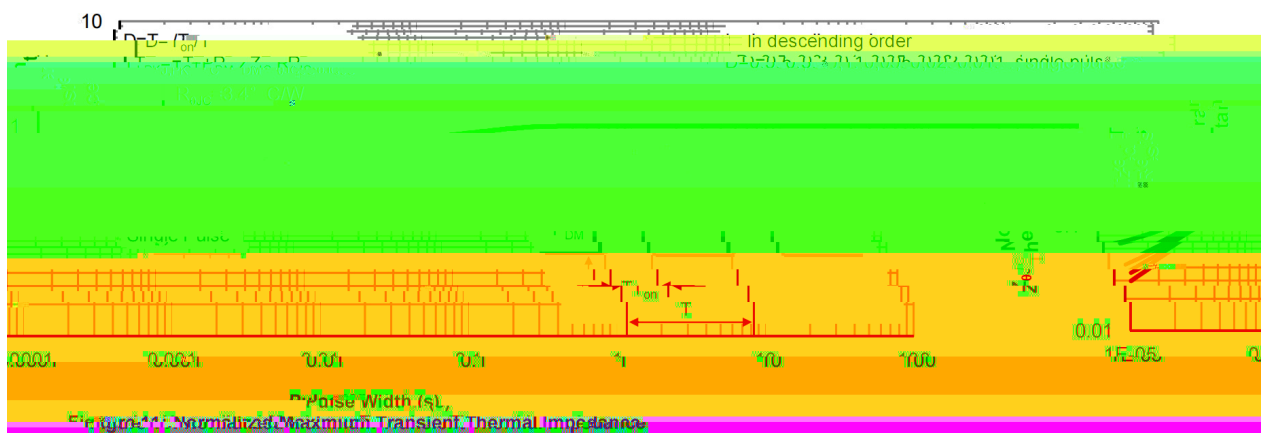


Figure 9: Normalized Maximum Transient Thermal Impedance

/ Package Dimensions



/ Marking Instructions

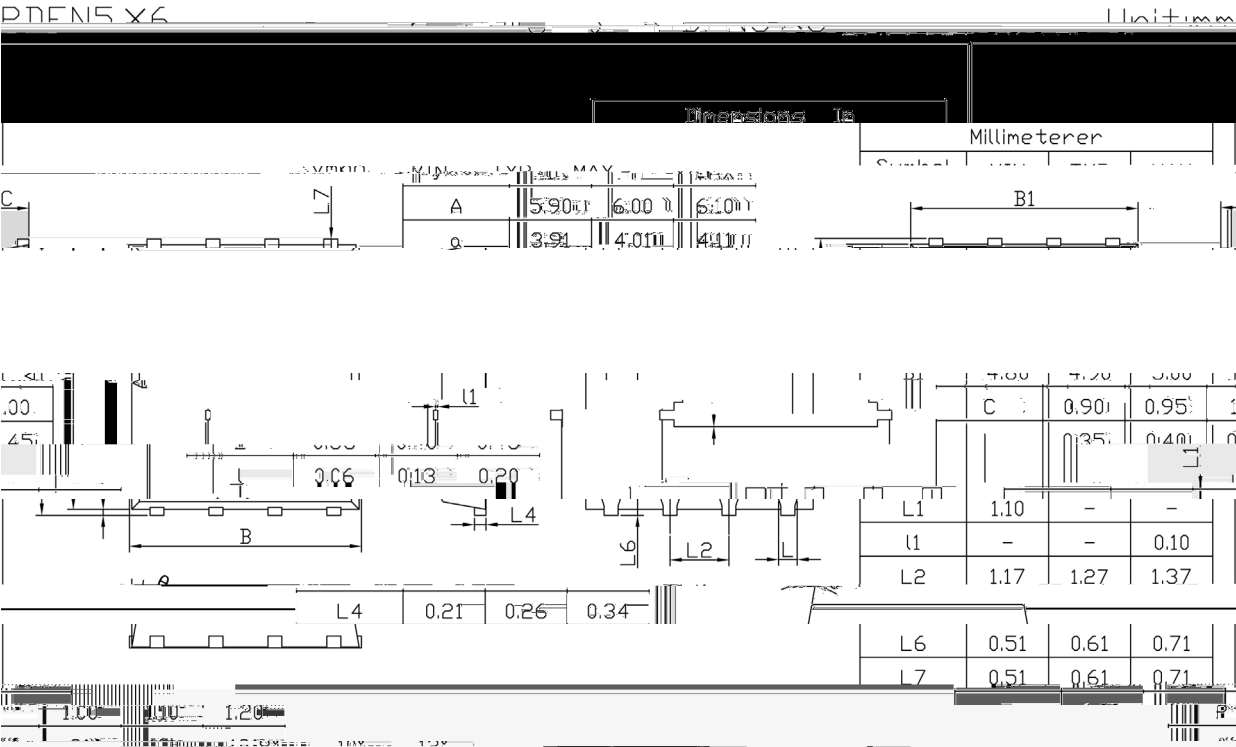

EU

T
