





PDFN5×6 N  
N-Channel MOSFET in a PDFN5×6 Plastic Package.


Low  $R_{DS(ON)}$  to minimize conductive loss;low Gate Charge for fast switching;Low Thermal resistance;HF Product.

MB/NB/UMPC/VGA

Buck

-

Battery Management,High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA,Networking DC-DC Power System,Load Switch.



5 ?

?









Parameter	Symbol	Rating	Unit
Drain-Source Voltage Drain	$V_{DS}$	80	V




Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=40V$ $R_L=2\ \Omega$ $R_{GEN}=3\ \Omega$		7.6		ns
Turn-On Rise Time	$t_r$			4.2		
Turn-Off Delay Time	$t_{d(off)}$			33		
Turn-Off Fall Time	$t_f$			7		



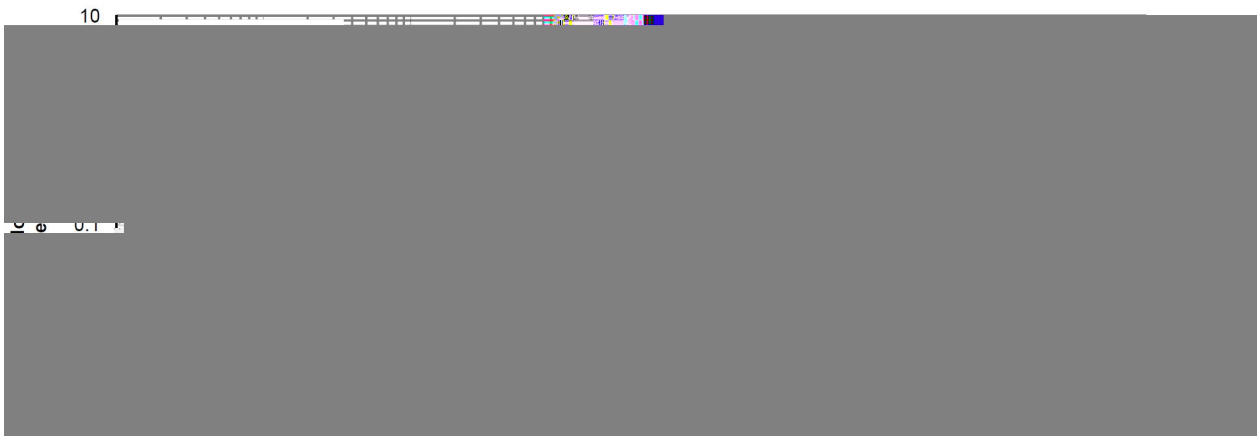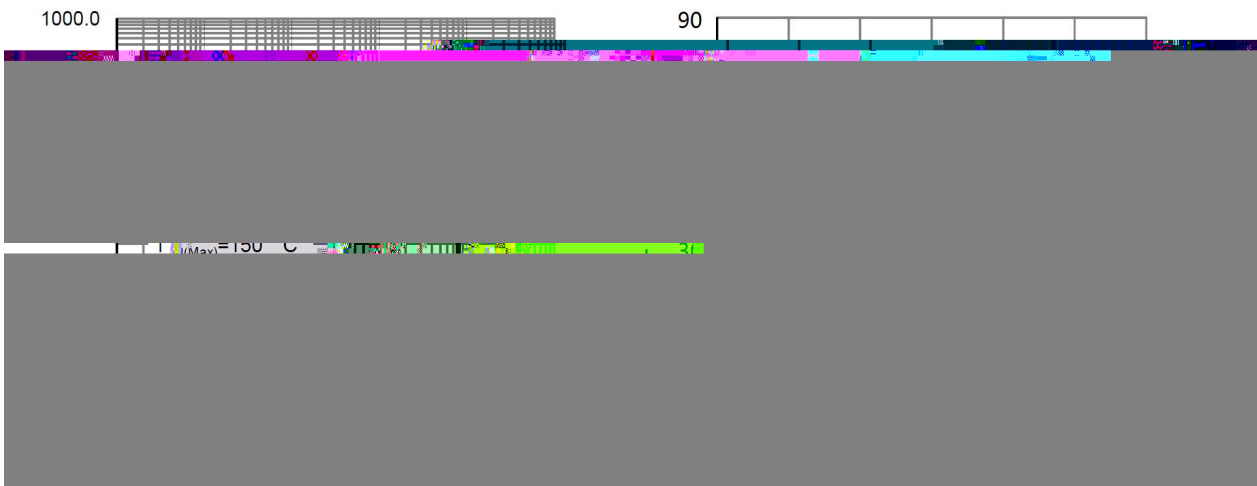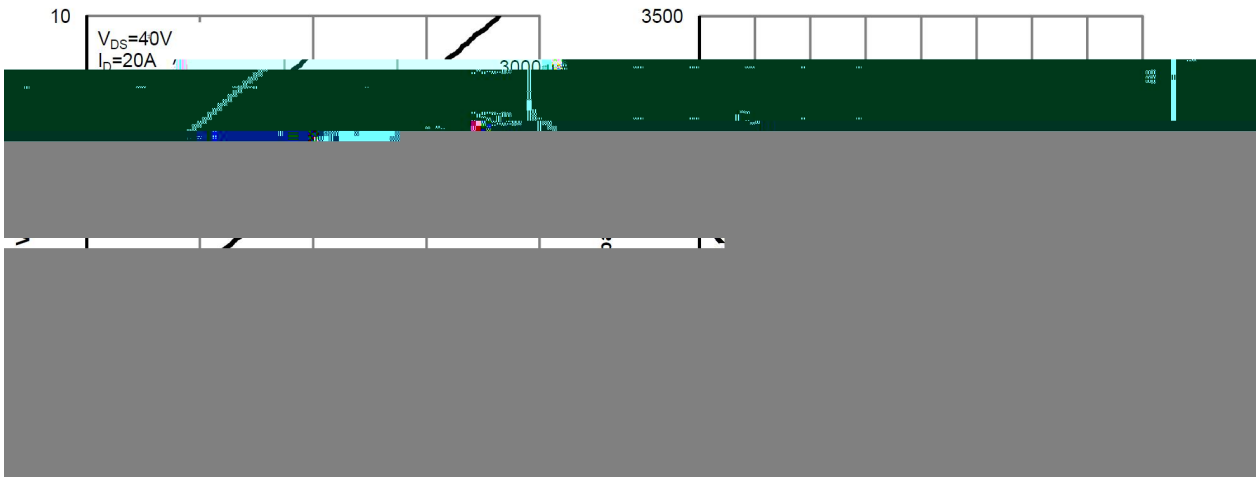

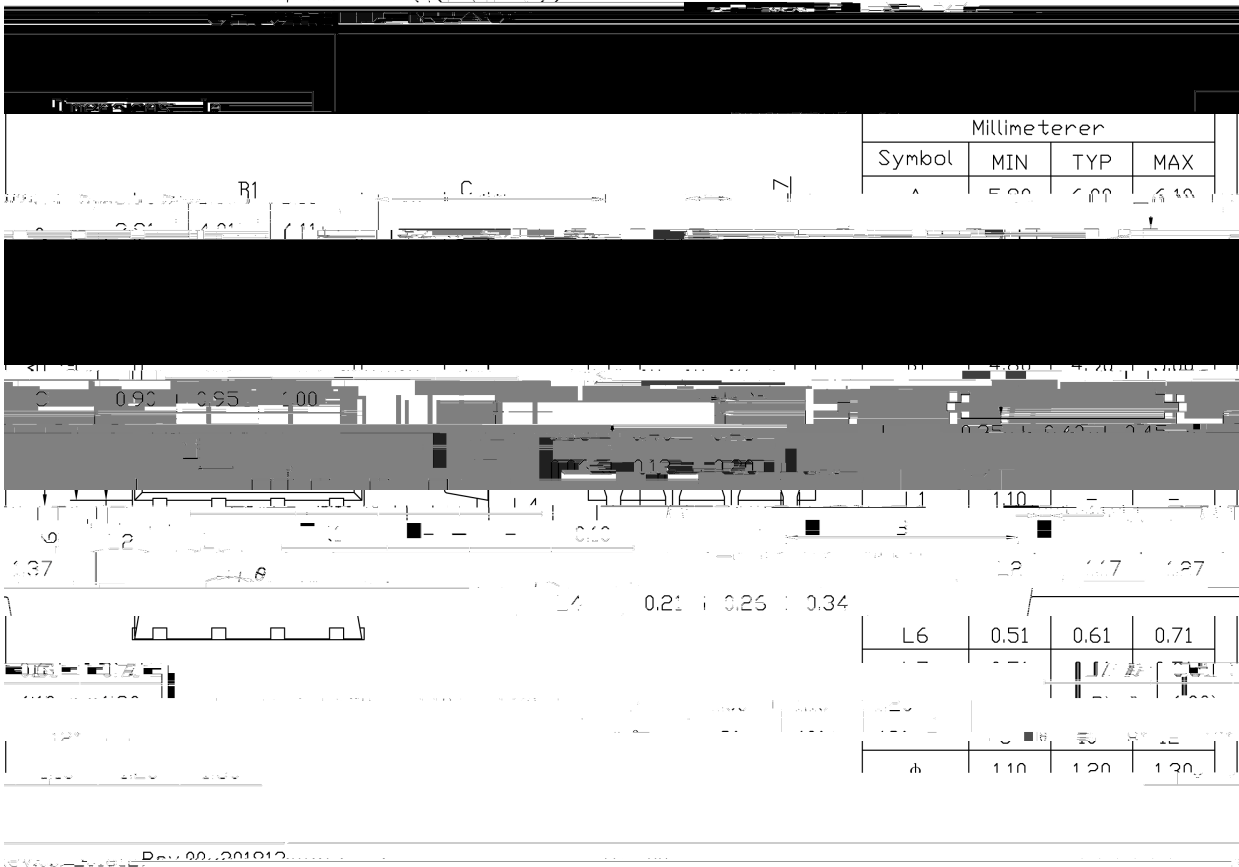



BR  
070N08S  
\*\*\*\*

Note

BR	Company Code
070N08S	Product Type
****:	Lot No. Code, code change with Lot No

