

BRCS100N06BD

/ Absolute Maximum Ratings(Ta=25)







	θ		
	θ		

/ Electrical Characteristics(Ta=25)




						Ω

BRCS100N06BD


/ Electrical Characteristic Curve

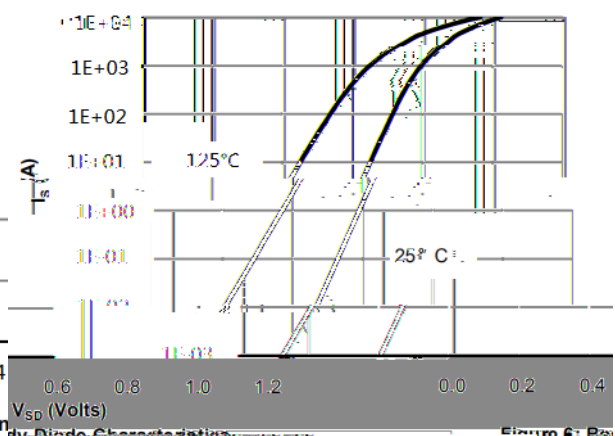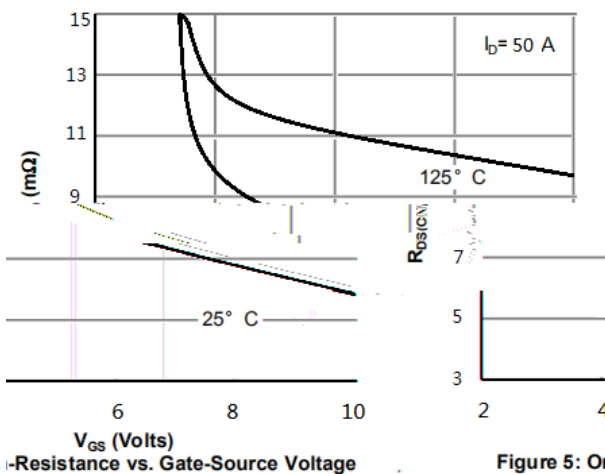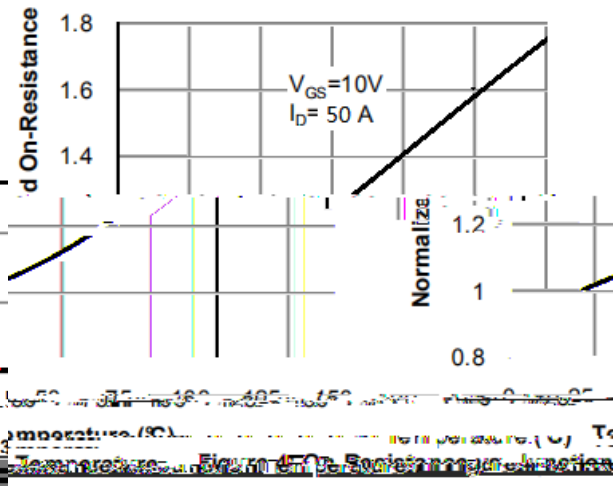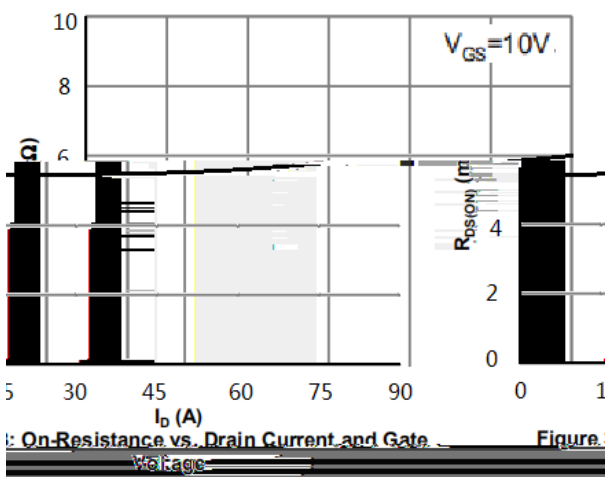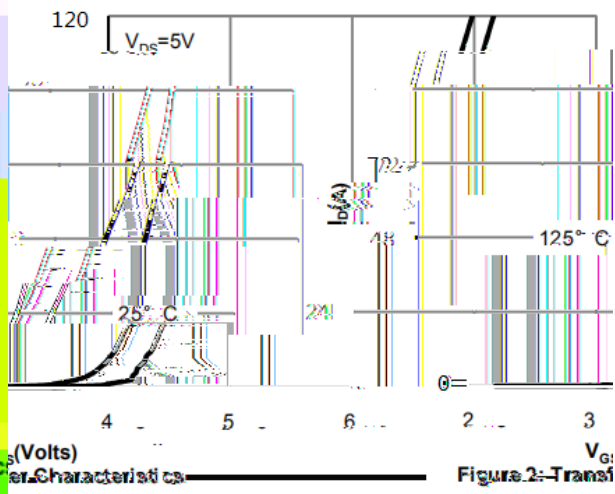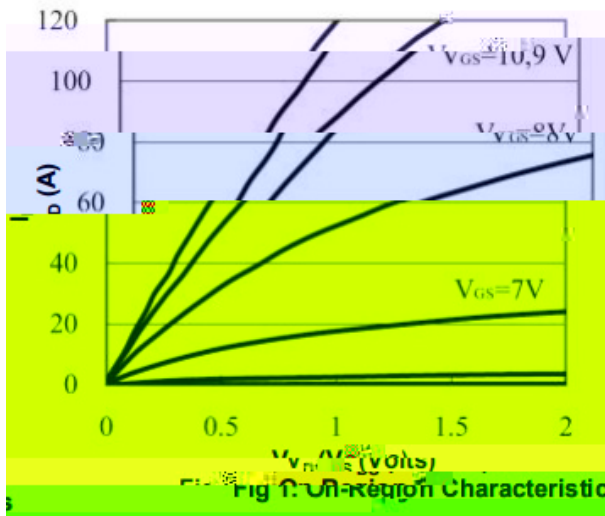

/ Electrical Characteristic Curve

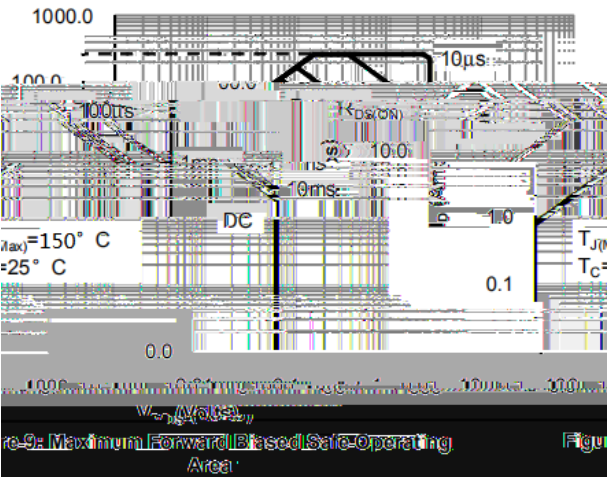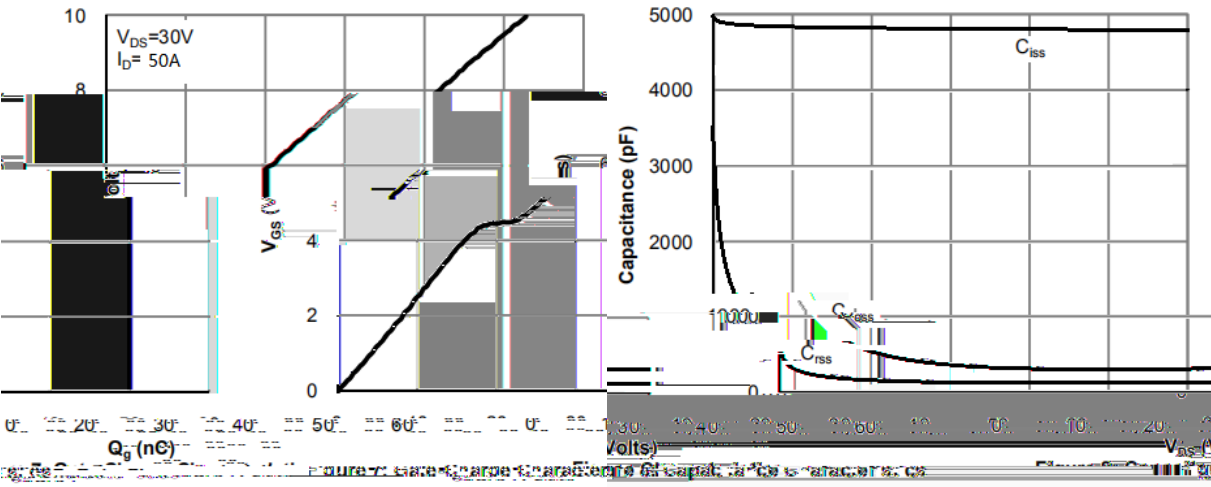


/ Package Dimensions

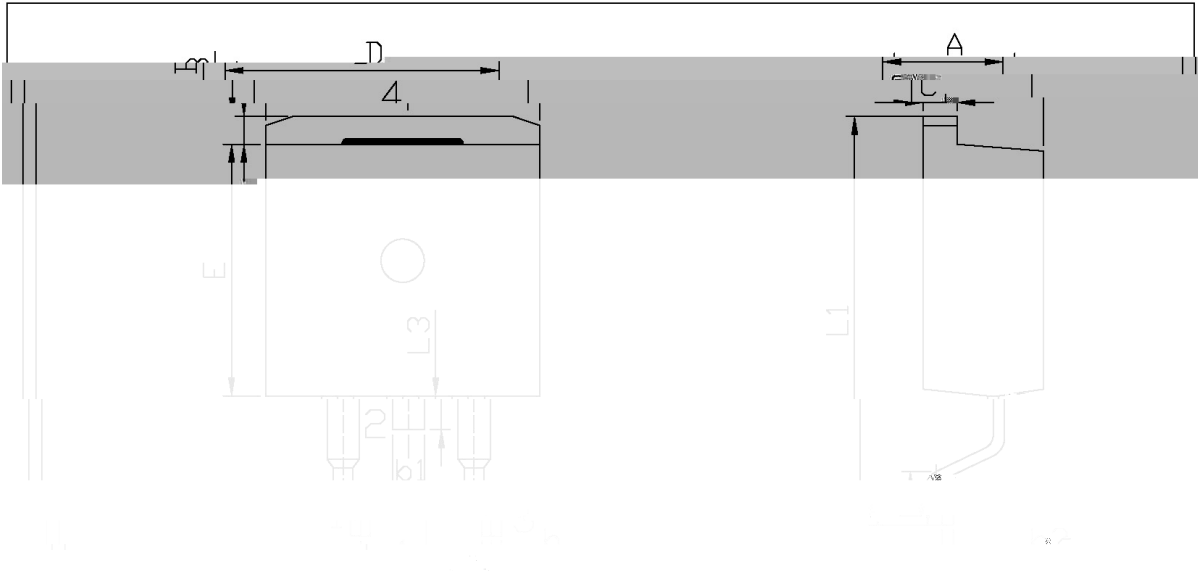


Max	Min	Max	Min
9.40	4.30	4.70	9.00
2.74	1.00	1.40	2.24
16.00	b1	1.15	1.35

/ Marking Instructions

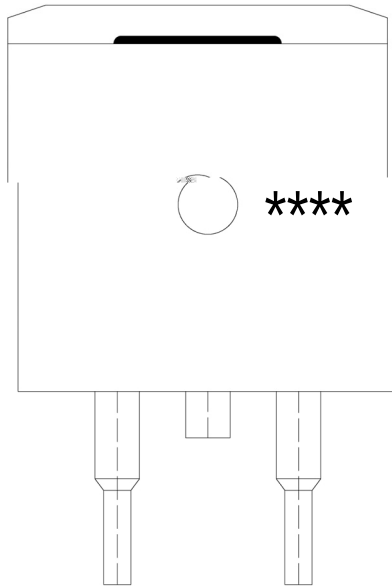

100N06

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

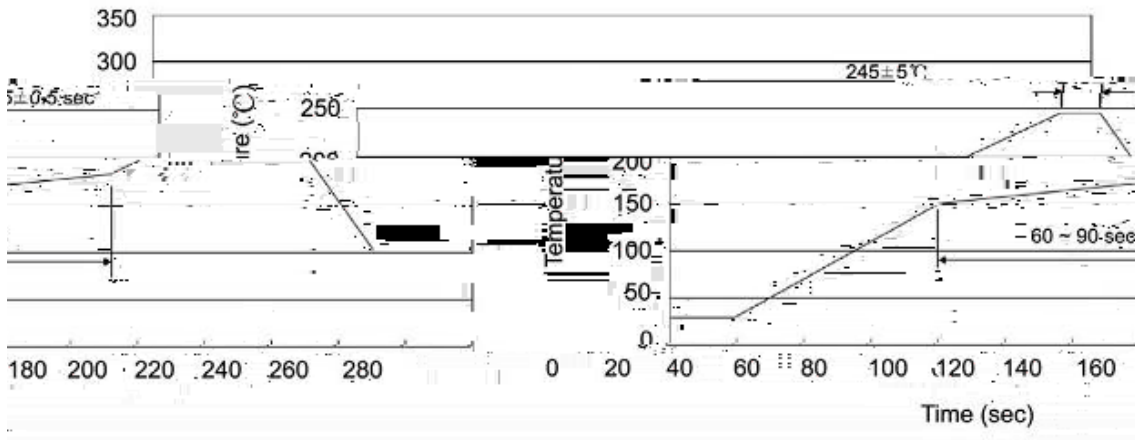

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

g m ô h				g m d Ê	
β m ù ´	Unit Reel / / í	Reel Box / í / ç	Unit Box / ç		!