

BRCS10N60AA



Rev.A Sep.-2017

TO-262 N MOS N-CHANNEL MOSFET in a TO-262 Plastic Package.

Low gate charge, low crss, fast switching.

DC/DC

These devices are well suited for high efficiency switching DC/DC converters .



PIN1 G PIN 2 D PIN 3 S


Rev.A Sep.-2017




<http://www.fsbrec.com>

BRCS10N60AA
Rev.A Sep.-2017

/ Package Dimensions

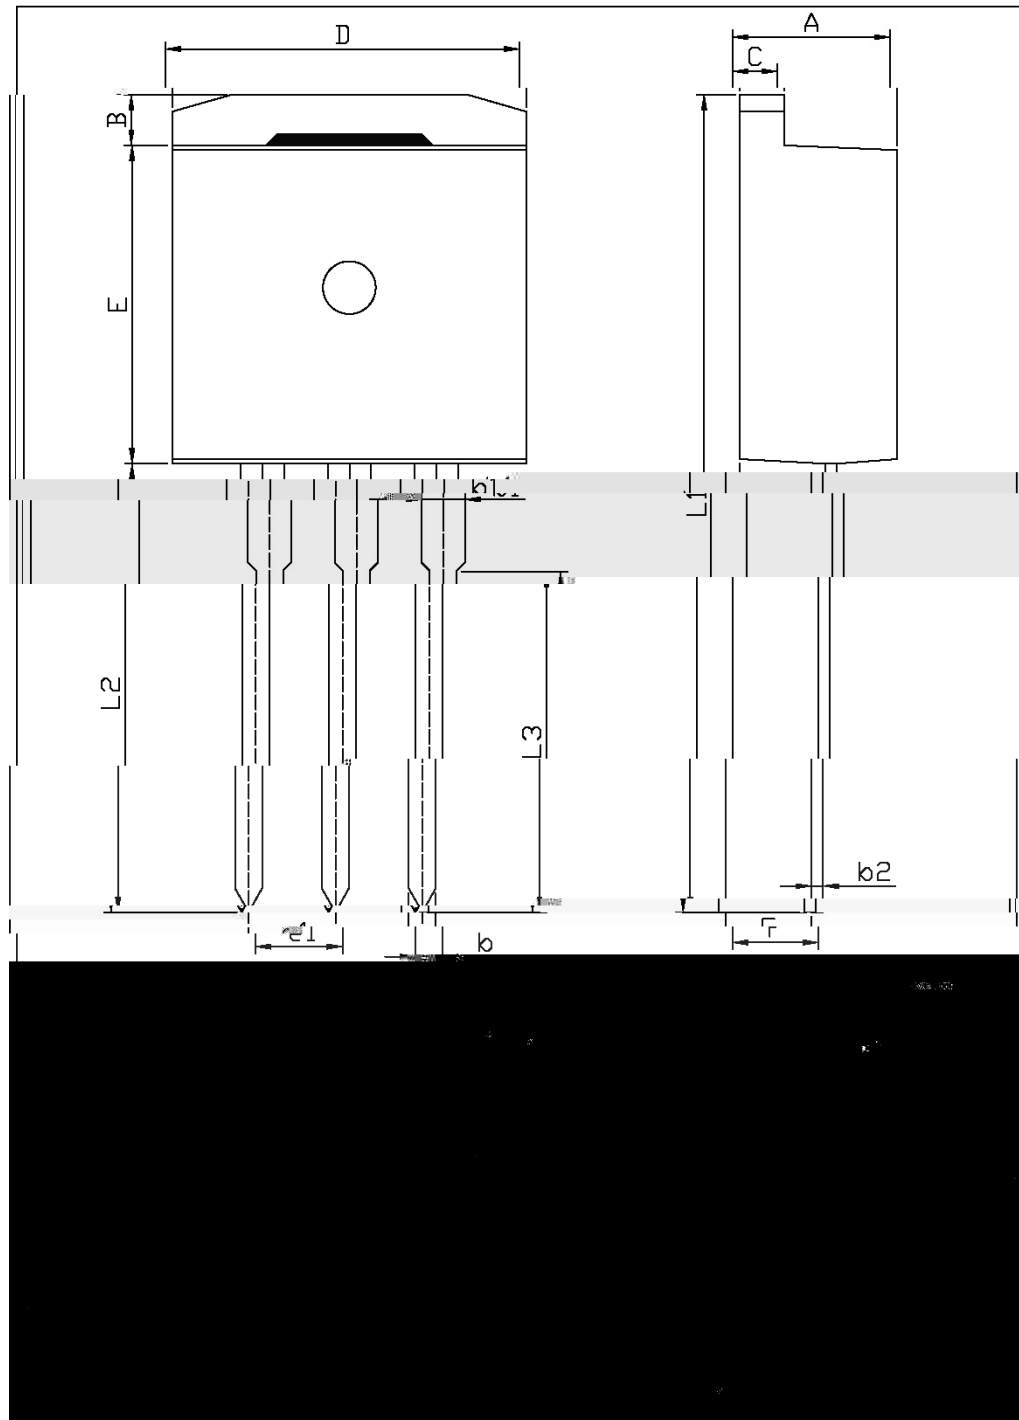

() / Temperature Profile for Dip Soldering(Pb-Free)

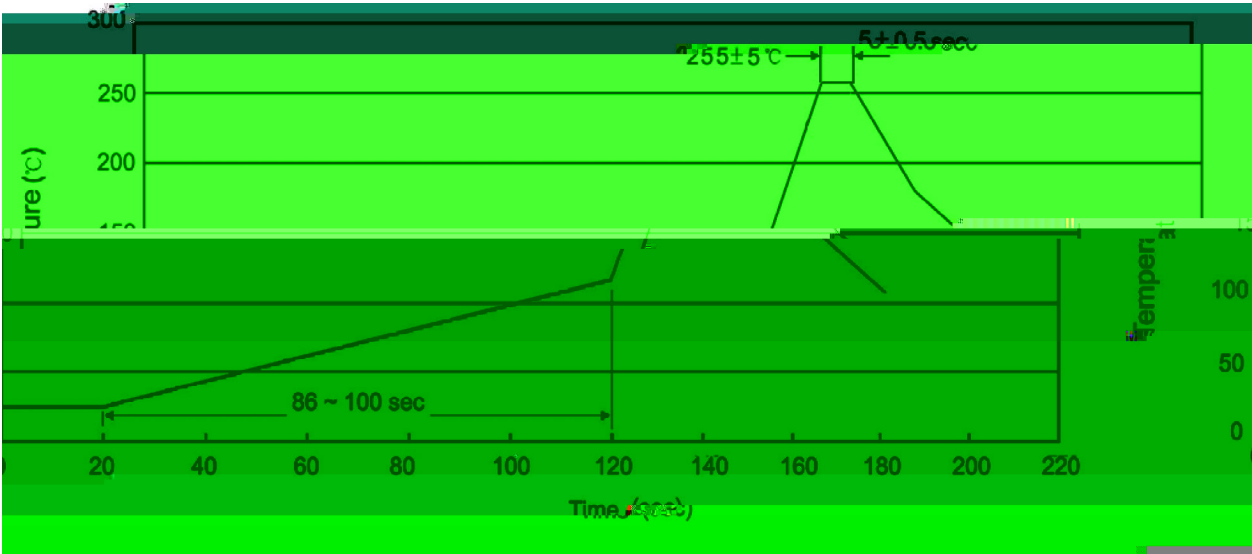

Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices