

--	--	--	--	--	--


A 2018-7

BRCS139WS

Rev.C Oct.-



/ Electrical Characteristic Curve

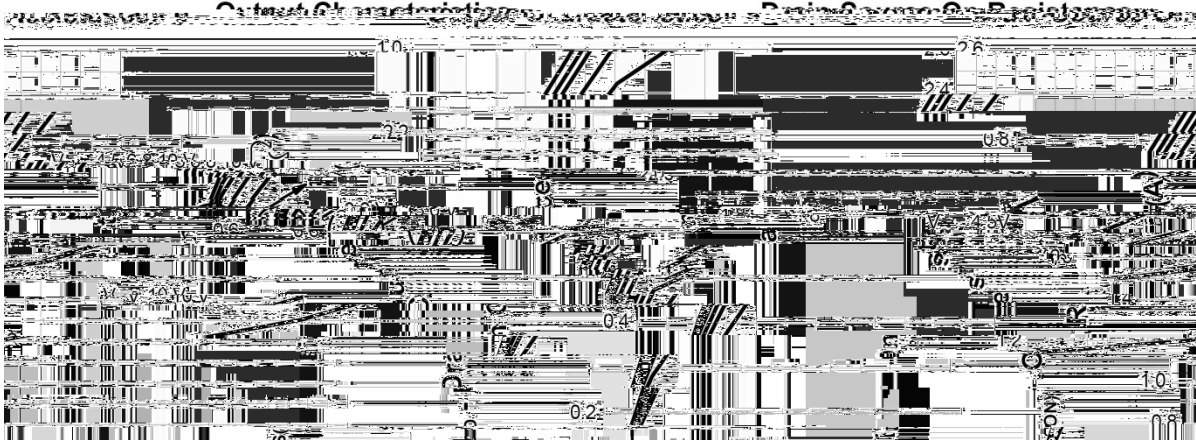

B

S

BRCS139WS
Rev.C Oct.-2021

t



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

- | | | | | |
|---|---------|-----------|-------|--|
| 1 | 150 180 | 60 90sec; | Note: | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C	10±1 sec.	Temp.:260±5°C	Time:10±1 sec
---------	-----------	---------------	---------------

/ Packaging SPEC.

/ REEL