


/ Revised record

	! " #	\$! % & '	! () % * +	, -	. /
A	2022.1.11	All	0 1 AOS-AOT412 2 3 4 5 6 - 7	8 9 :	; < =

BRCS150N12SRA

Rev.A Feb.-2022



DATA SHEET

TO-220 > ? ? @ N A B C D E F G




N-CHANNEL MOSFET in a TO-220 Plastic Package.

测试条件
Test Condition


参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
-----------------	--------------	-------------------------	------------	------------	------------	------------

BRCS

/ Electrical Characteristic Curve

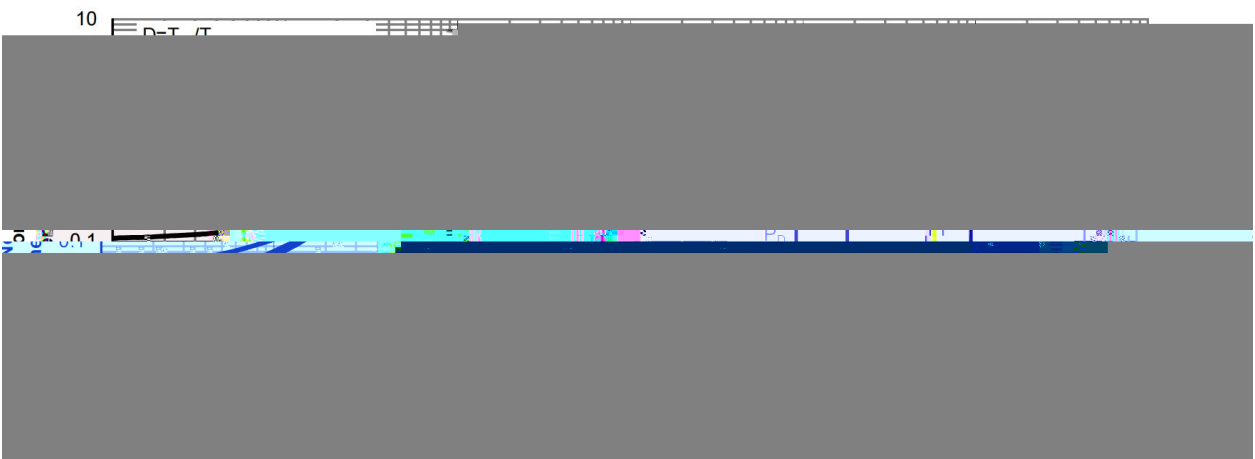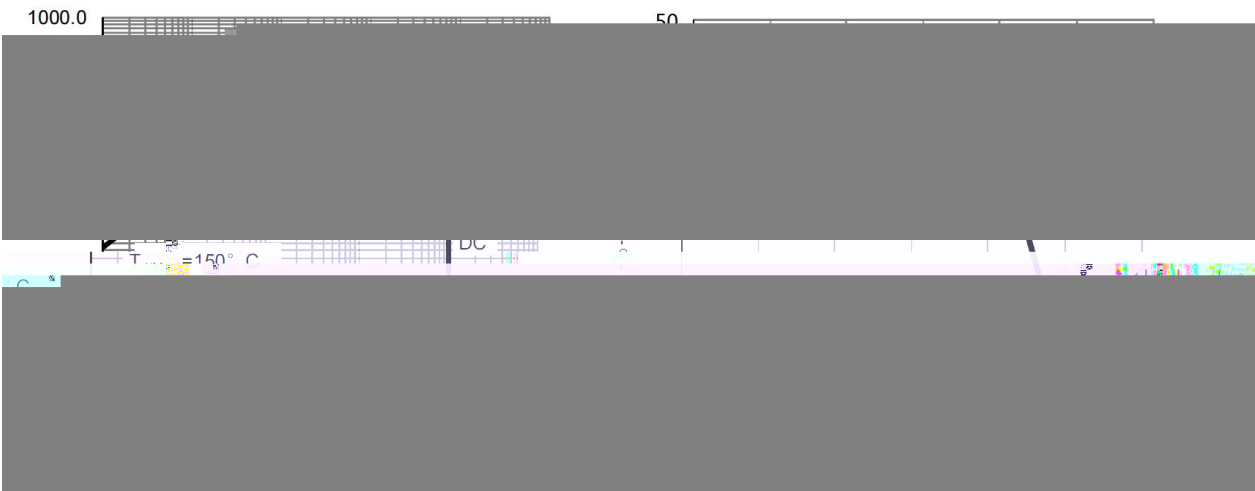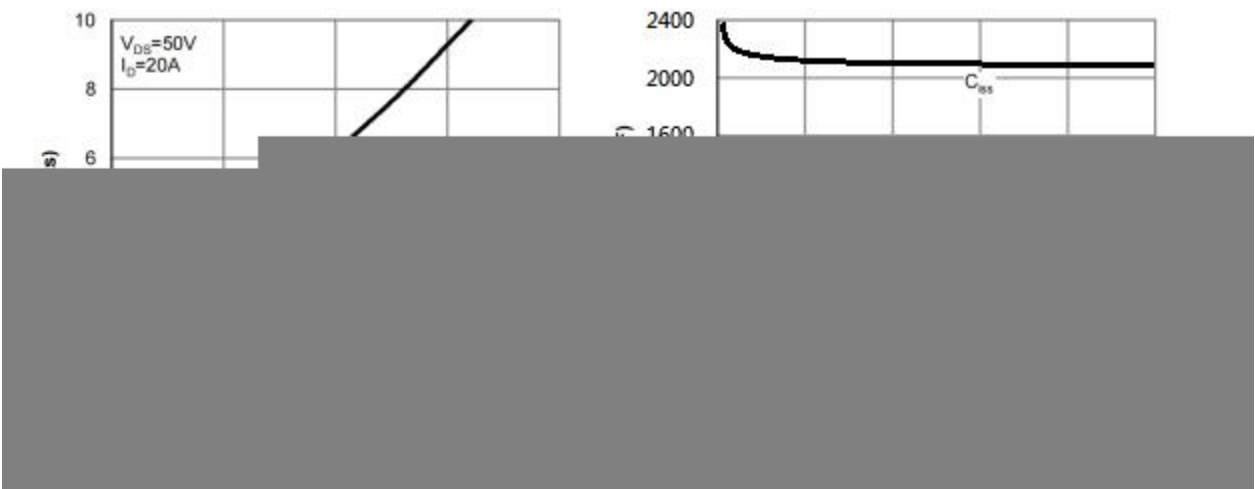

/ Marking Instructions

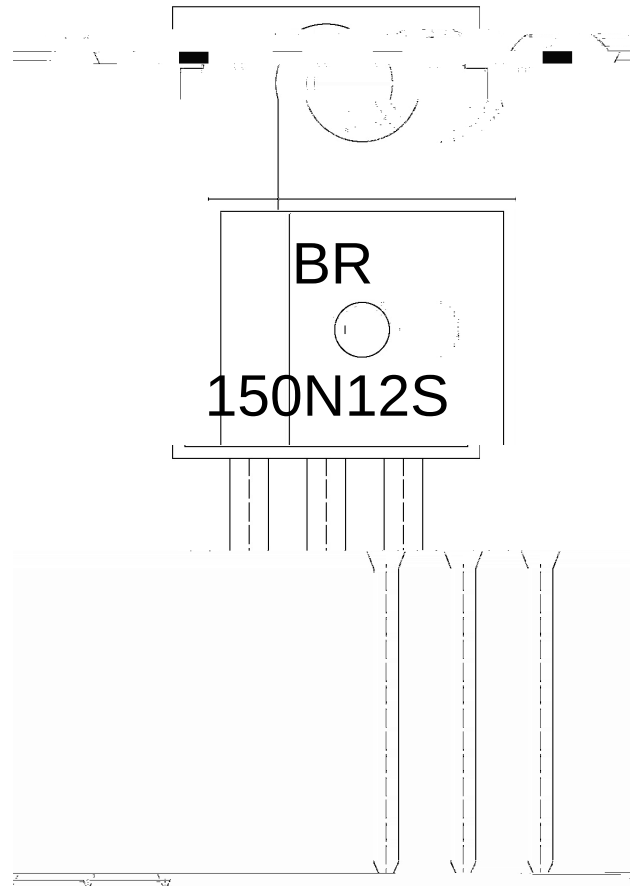

BR

150N12S


Note:

BR: Company Code

150N12S: Product Type

****: Lot No. Code, code change with Lot No

() / Temperature Profile for Dip Soldering(Pb-Free)

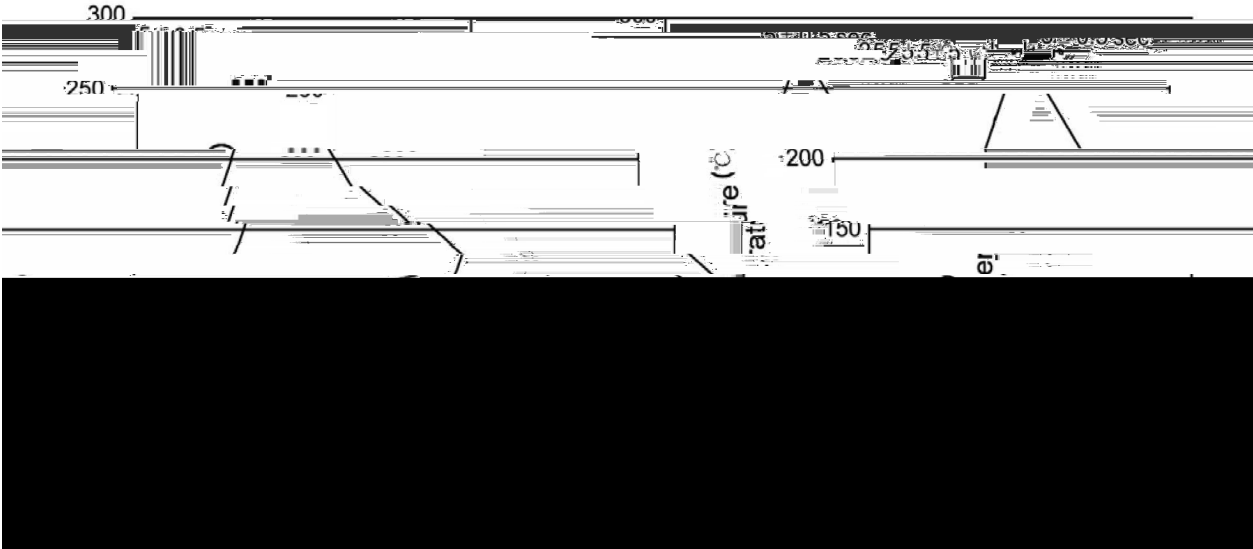

Note:				1.Preheating:25~150°C, Time:60~90sec. ^R 2.Peak Temp.:255±5°C, Duration
1	25	150	60 90sec;	
2	255±5		5±0.5sec;	