
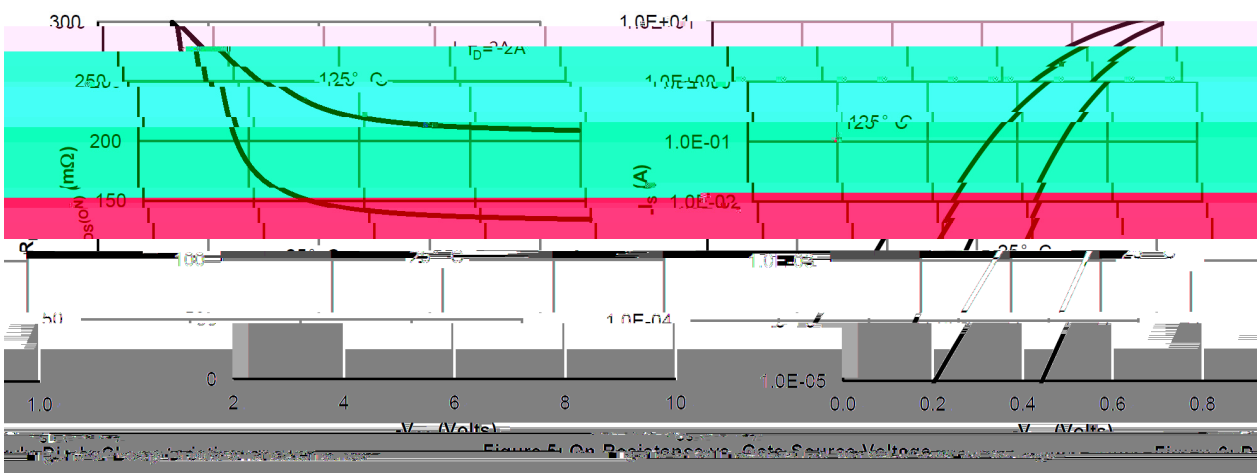
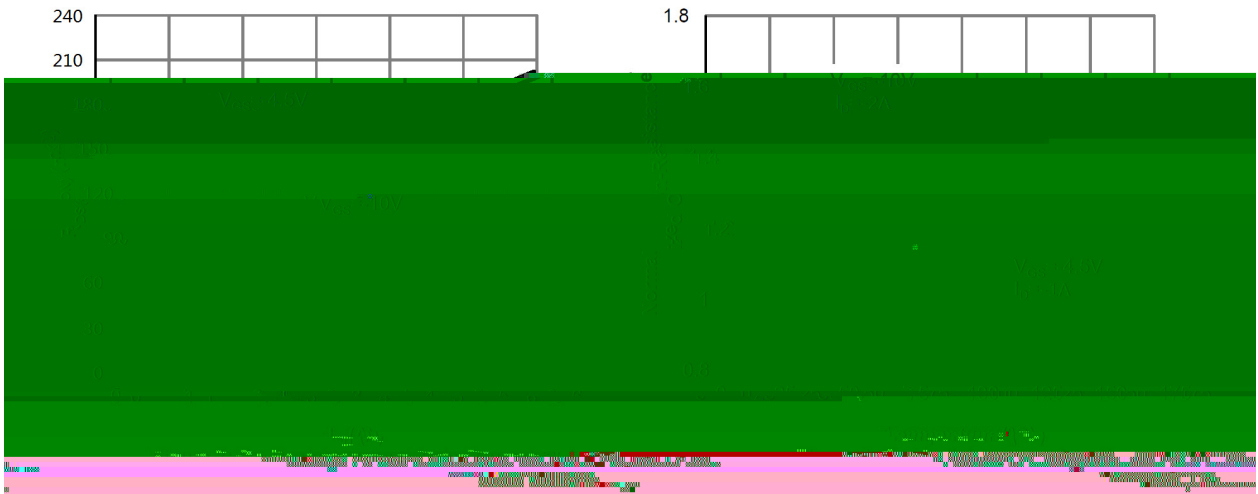





BRCS1C0P06DSC

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V _{DSS}		


/ Electrical Characteristic Curve

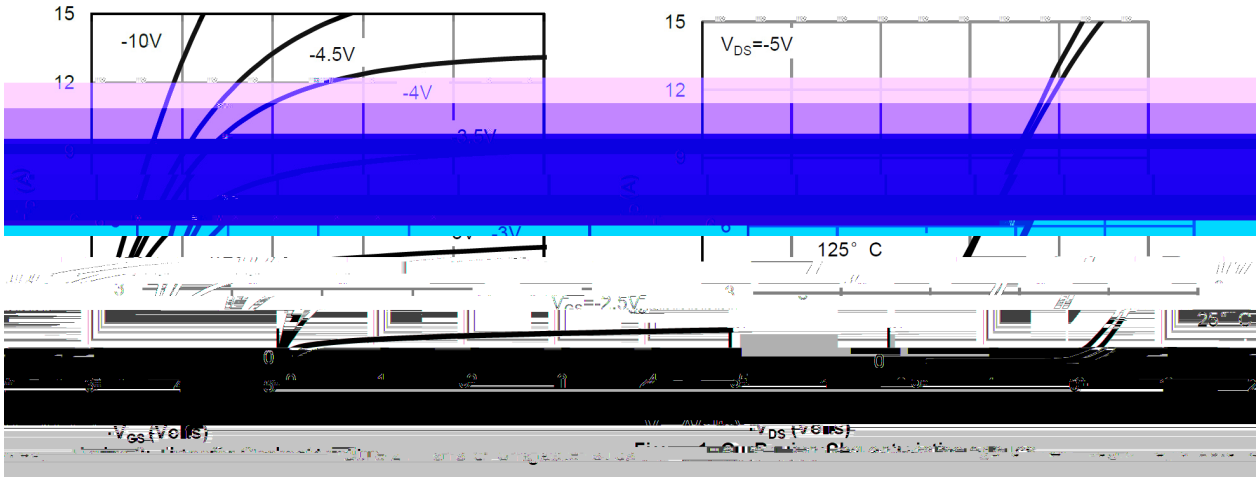


/ Electrical Characteristic Curve

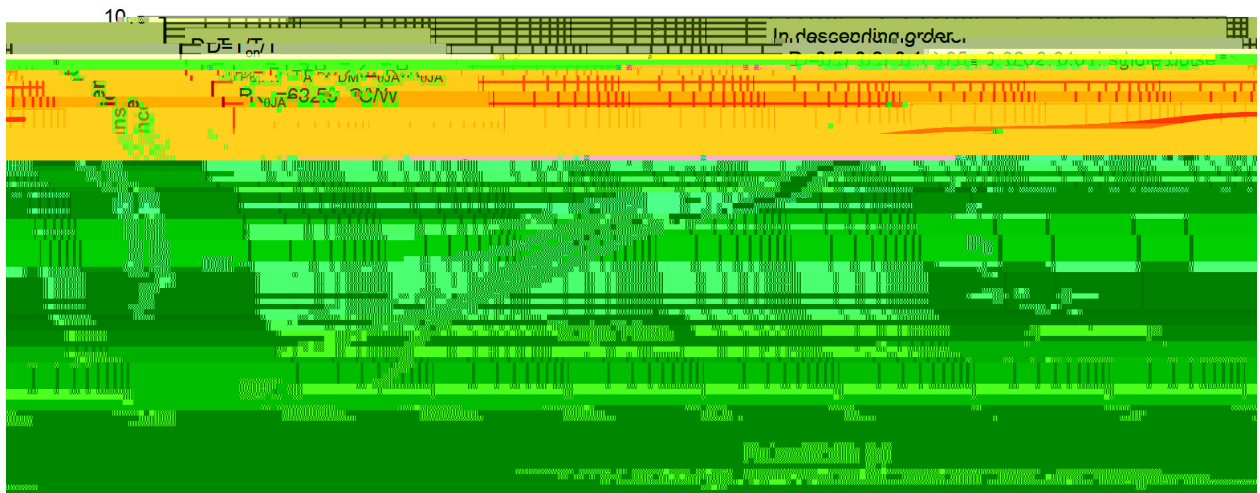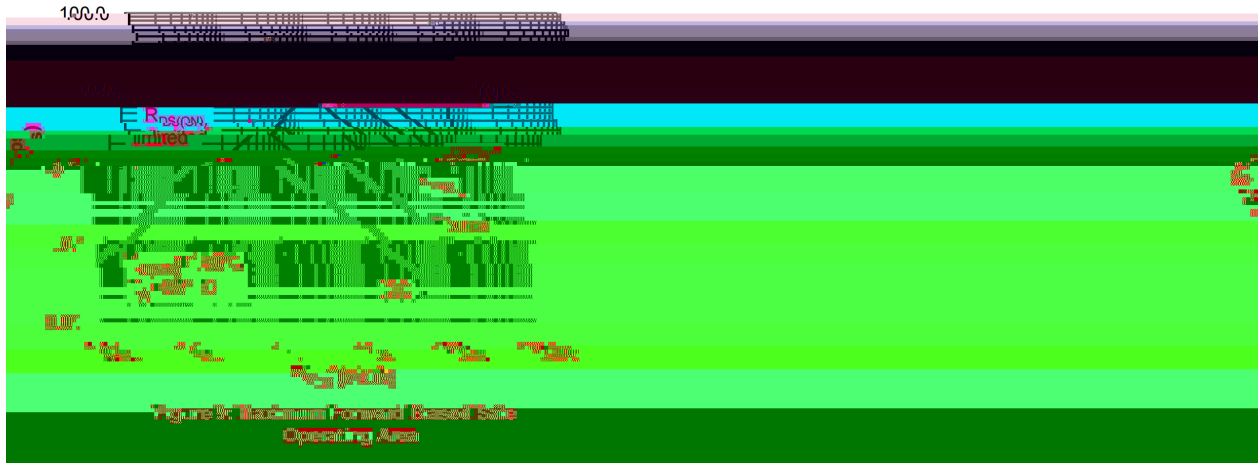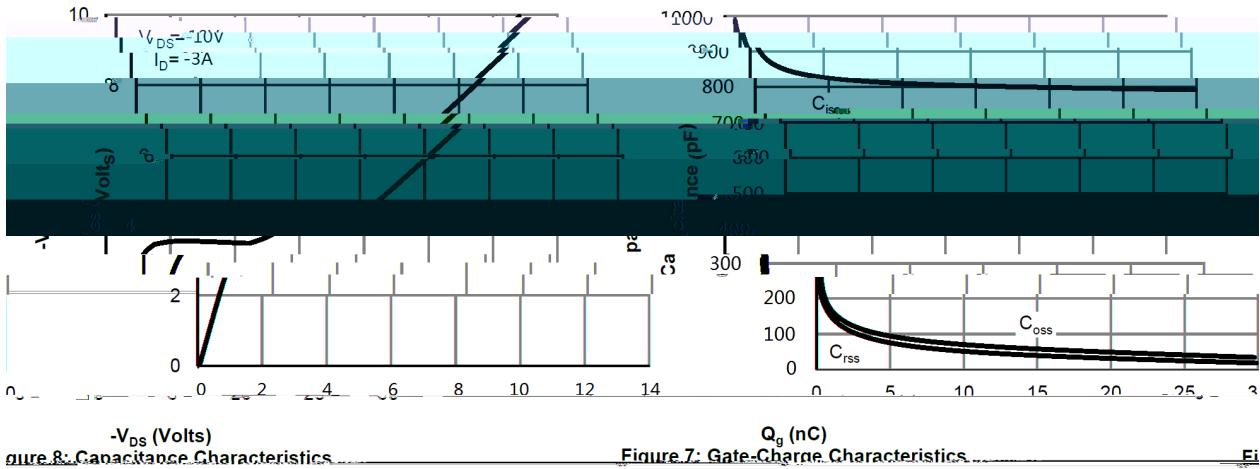

/ Package Dimensions

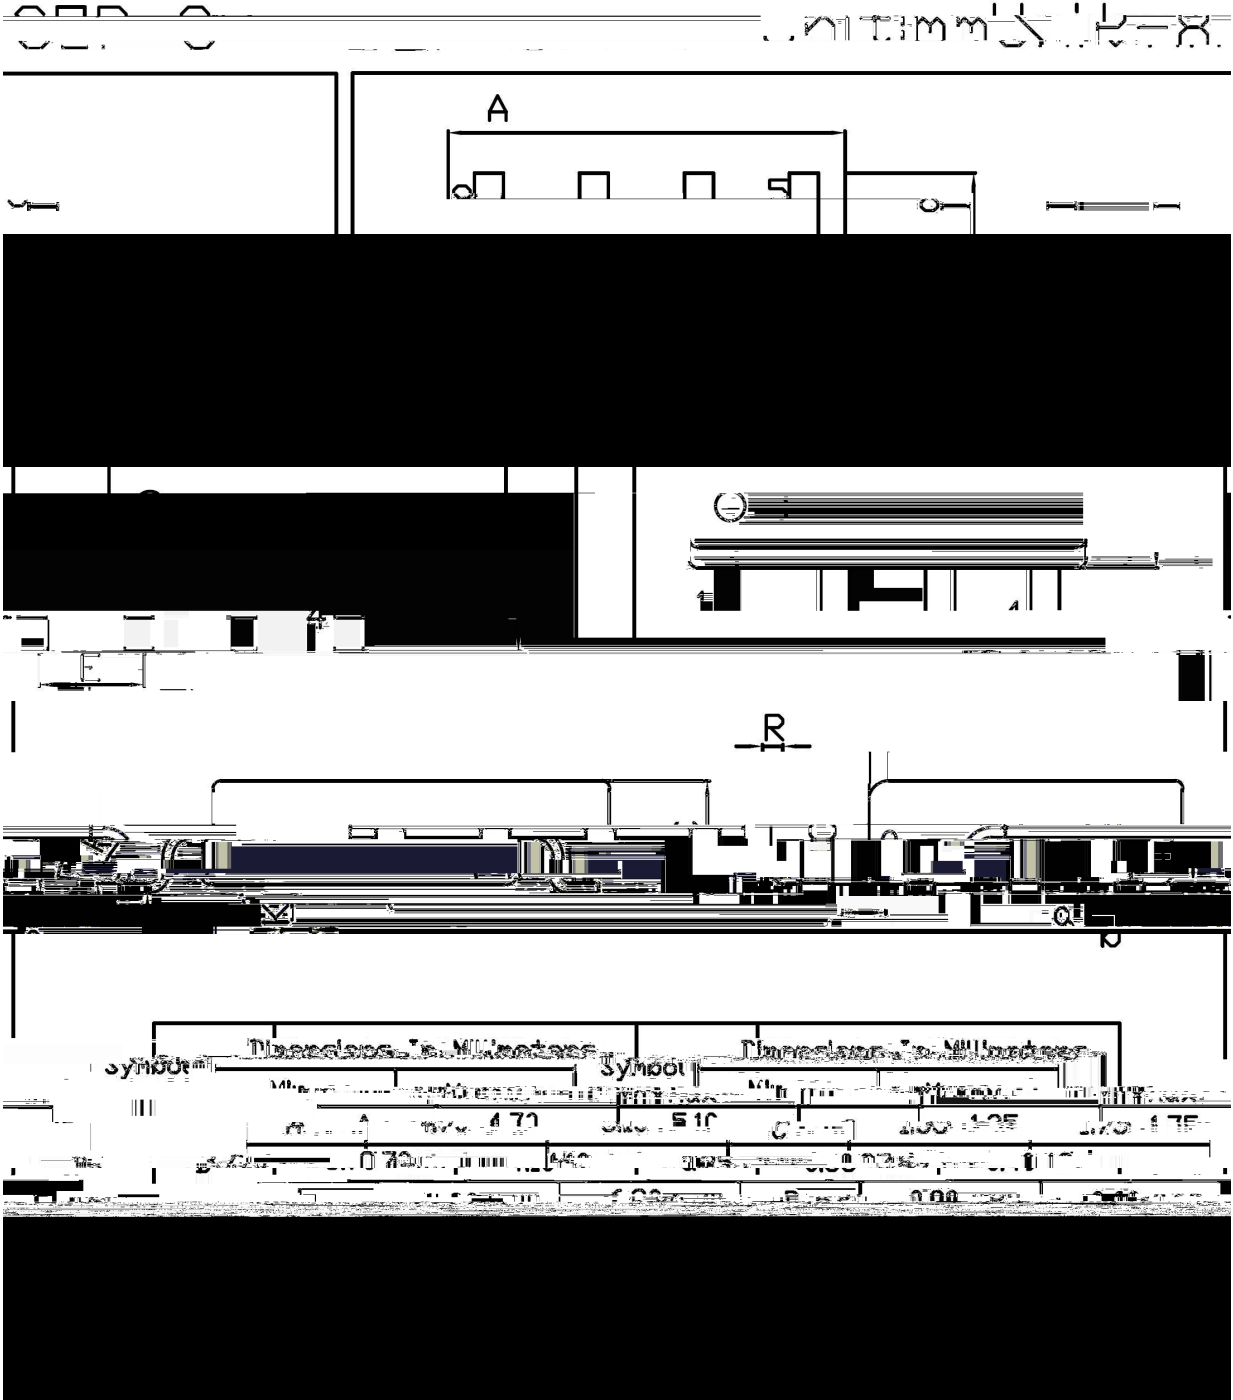

/ Marking Instructions

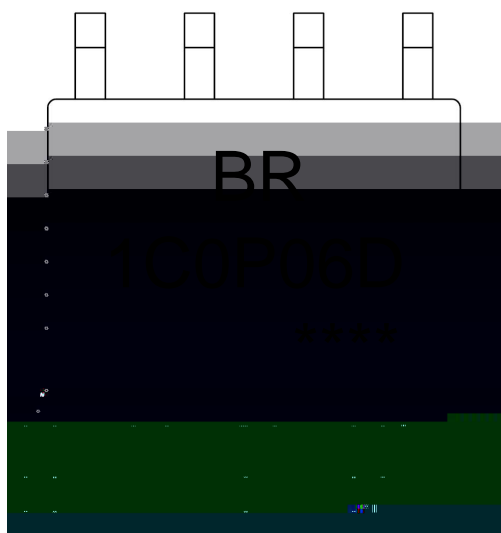

BR

1C0P06D


Note:

BR: Company Code

1C0P06D: Product Type Code

****: Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

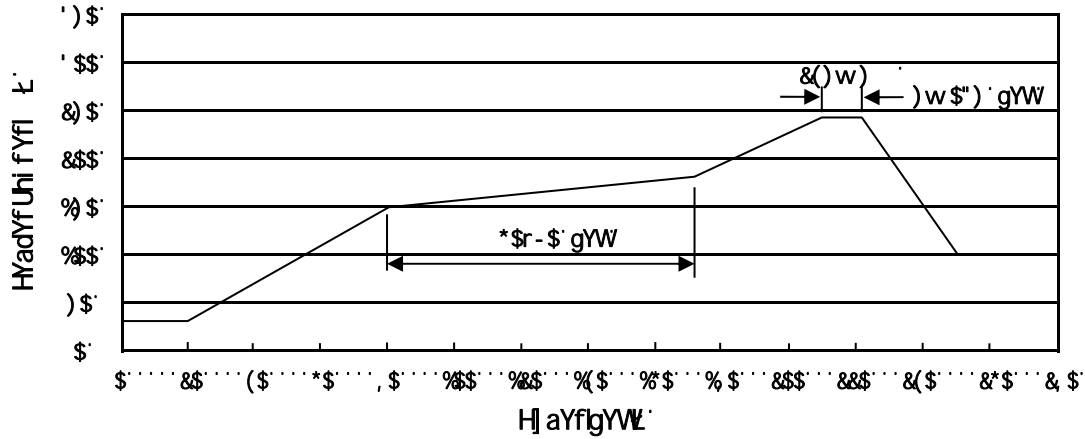

Note:

- 1 150 180 60 90sec; 1.Preheating:150~180 , Time:60~90sec.
- 2 245±5 5±0.5sec; 2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3 2 10 /sec. 3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366

/ Notices