

BRCS200P03YB

Rev.A May.-2022


PDFN3x3A-8L P

P-Channel MOSFET in a PDFN3x3A-8L Plastic Package .

Low $R_{DS(ON)}$ to minimize conductive loss;low Gate Charge for fast switching;Low Thermal resistance;HF Product.

/

Notebook AC-in Load Switch,Battery Protection Charge/Discharge

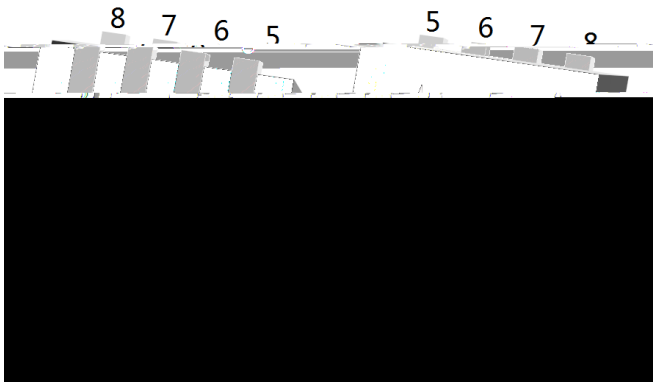

PIN1 2 3 S PIN4 G PIN5 6 7 8 D


/ Absolute Maximum Ratings($T_a=25$)

Parameter	Symbol	Rating	Unit	
Drain-Source Voltage	V_{DS}	-30	V	
Drain Current - Continuous	$I_D(T_c=25)$	-24	A	
Drain Current – Pulsed	I_{DM}	-80	A	
Gate-Source Voltage	V_{GS}	± 20	V	
Power Dissipation	$P_D(T_c=25)$	20	W	
Single Pulse Avalanche Energy(L=0.5mH)	E_{AS}	152	mJ	
Avalanche Current(L=0.5mH)	I_{AS}	19.5	A	
Junction and Storage Temperature Range	T_j, T_{stg}	-55 to 150		
Thermal resistance, junction - ambient	t 10s	R_{JA}	30	/ W
	Steady-State		65	
Thermal resistance, junction - case	Steady-State	R_{JC}	7	

/ Electrical Characteristics($T_a=25$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=-250$ A $V_{GS}=0V$	-30	-33		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-30V$ $V_{GS}=0V$			-1.0	μA
Gate-Body leakage current	I_{GSS}	$V_{DS}=0V,$ $V_{GS}=\pm 20V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=-250$ A	-1.0	-1.3	-3.0	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=-10V,$ $I_D=-10A$		17.5	20	m
		$V_{GS}=-4.5V,$ $I_D=-10A$		25.5	30	
Diode Forward Voltage	V_{SD}	$I_S=-1A,$ $V_{GS}=0V$			-1.2	V
Input Capacitance	C_{iss}	$V_{DS}=-25V$ $V_{GS}=0V$ $f=1.0MHz$		1430		pF
Output Capacitance	C_{oss}			580		
Reverse Transfer Capacitance	C_{rss}			350		
Gate resistance	R_g		$V_{GS}=0V$ $V_{DS}=0V$ $f=1MHz$		13	
Total Gate Charge	$Q_{g(10V)}$	$V_{GS}=-10V,$ $V_{DS}=-15V,$ $I_D=-9.7A$		20		nC
Total Gate Charge	$Q_{g(4.5V)}$			9.5		
Gate Source Charge	Q_{gs}			3.5		
Gate Drain Charge	Q_{gd}			4.5		


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=-10V$ $V_{DS}=-15V$ $R_L=1.5$ $R_{GEN}=3$		10		ns
Turn-On Rise Time	t_r			5.5		
Turn-Off Delay Time	$t_{d(off)}$			26.1		
Turn-Off Fall Time	t_f			9.1		


BRCS200P03YB

0859(.7c207Ac2159(2e)2250)218#.42e)2252eA

/ Electrical Characteristic Curve

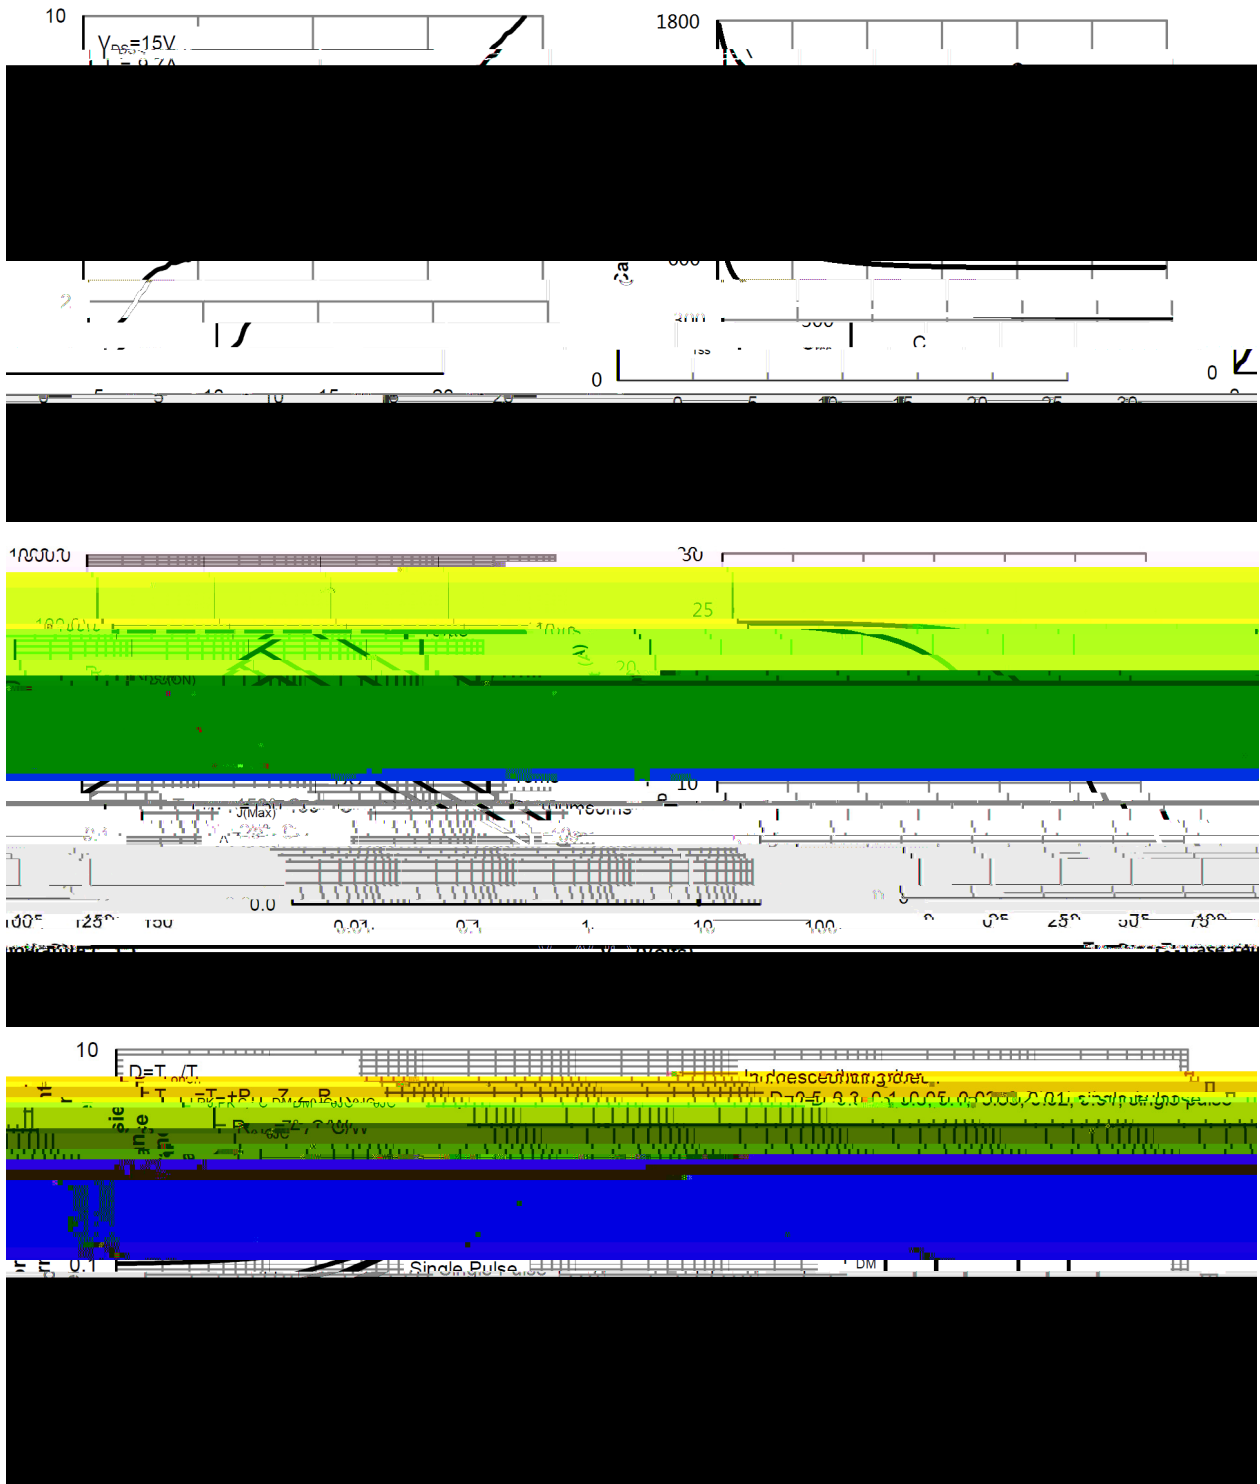

/ Marking Instructions

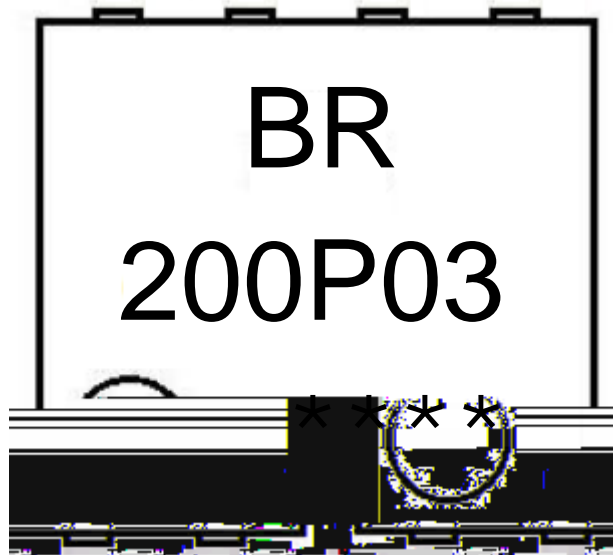

BR

200P03

Note:

BR: Company Code.

200P03: Product Type Code

****: Lot No. Code, code change with Lot No

BRCS200P03YB

Rev.A May.-2022

() /

Note:

- | | | | |
|---|---------|-----------|---|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box