






f

Parameter

Symbol





fi fi "fi fi ! 6#)3(%) . 6fi ' ? . ( . ) 3#(%&3%) fi ' 5(\$#fi

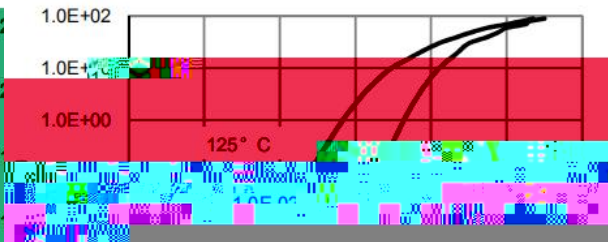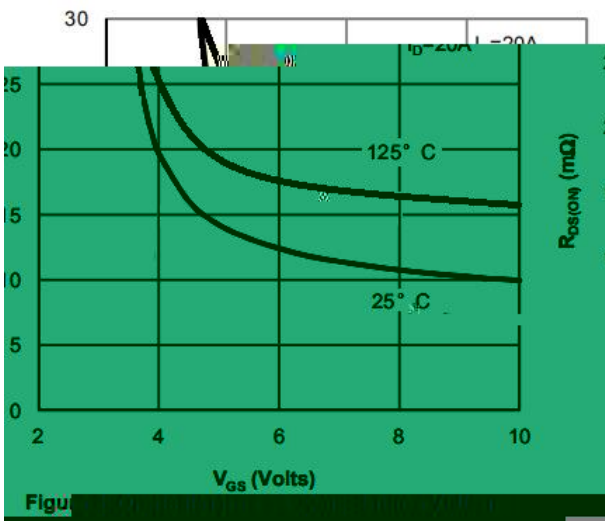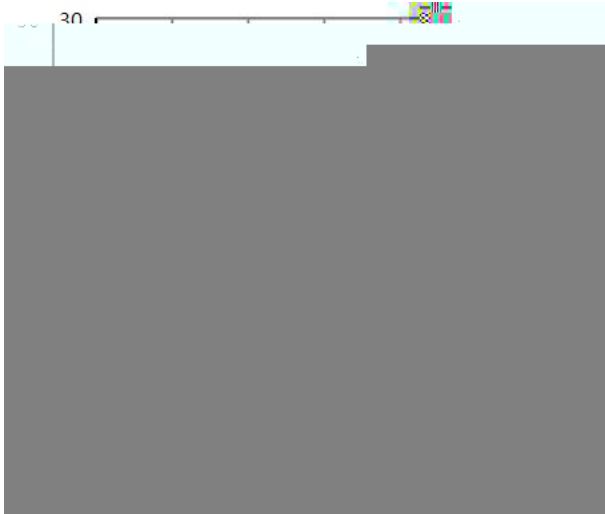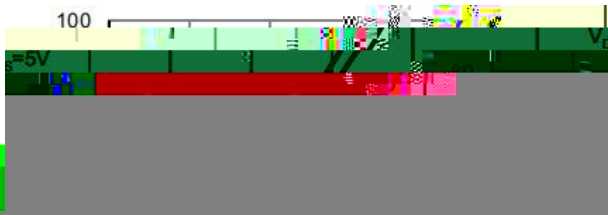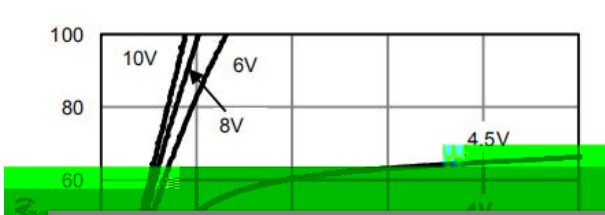




łłł"łłł!6#)3(%).6łł`?.(.)3#(%&3%)łł`5(\$#łł

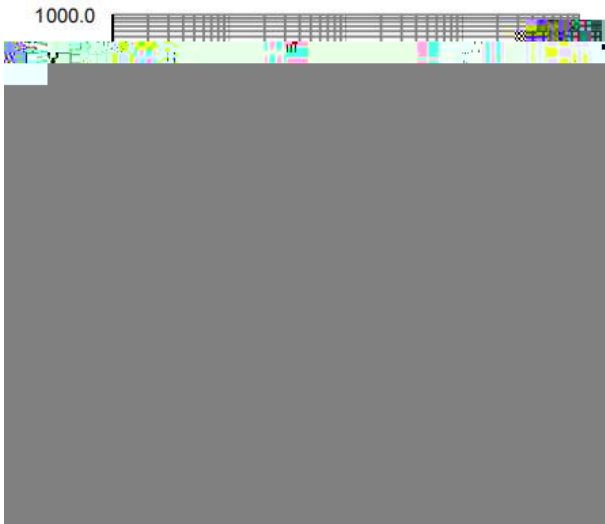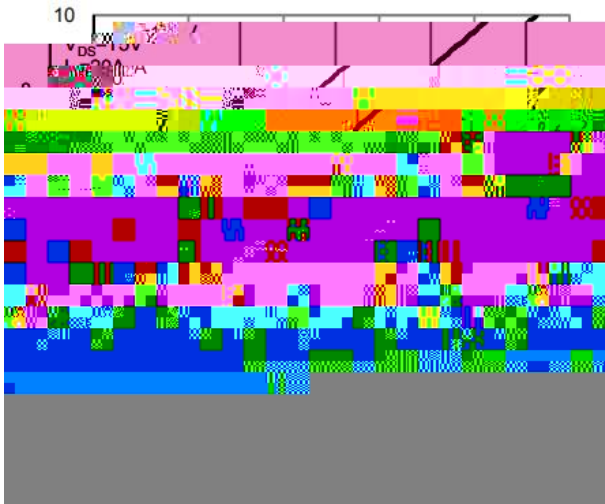


Technical drawing title bar with Chinese characters.

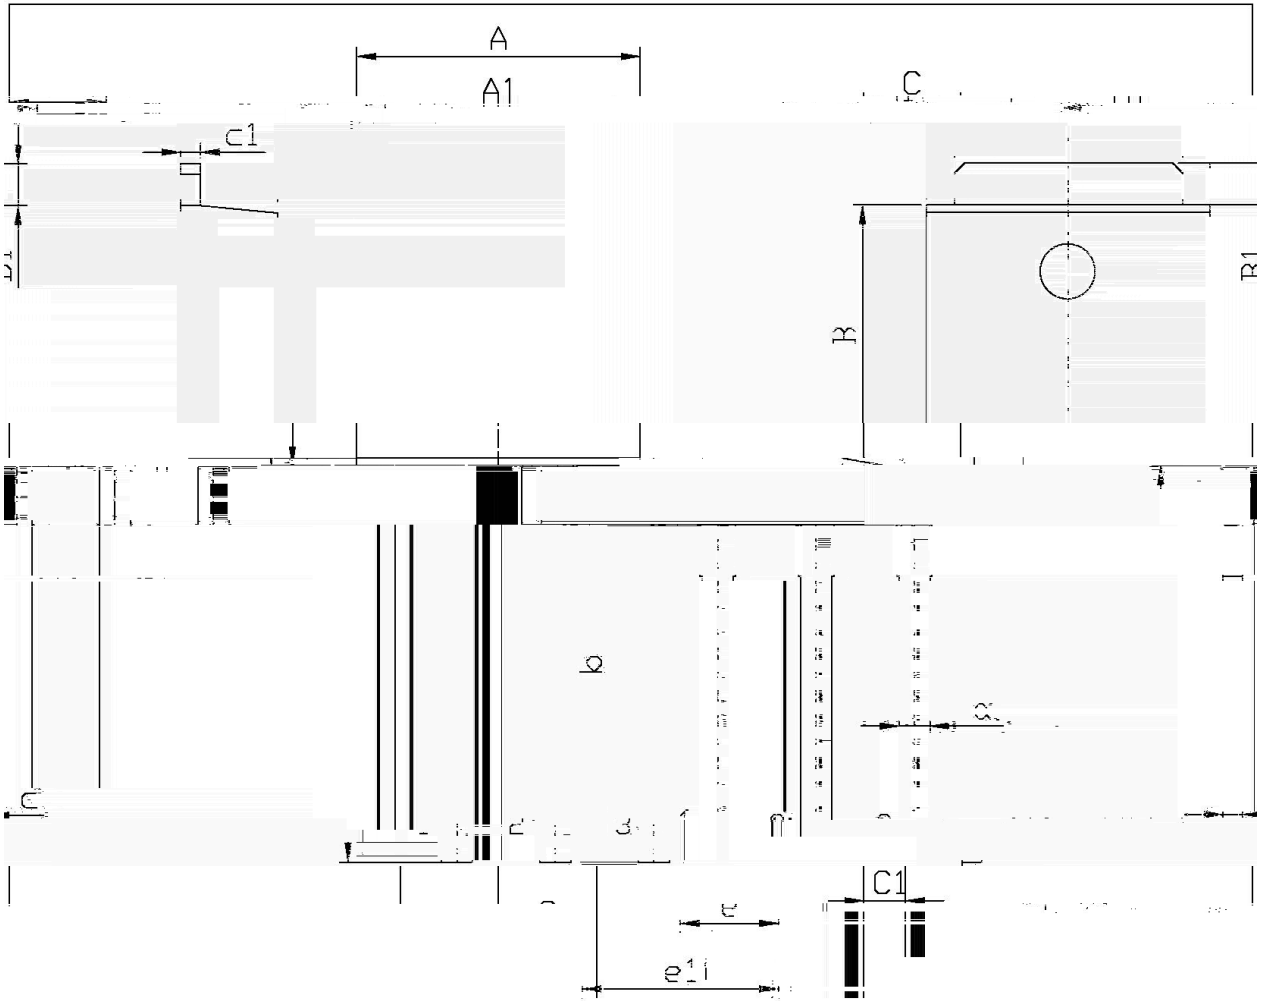

mm



单位.

Max	Symbol	Min	Max	Symbol	Min
6.75	a	0.50	6.75	A	6.45
5.10	5.50	b	9.00	9.40	A1
		B	5.95	6.25	c
	R1	0.95	1.25	0.45	0.55
			0.20	0.40	0.24
			0.25	0.35	

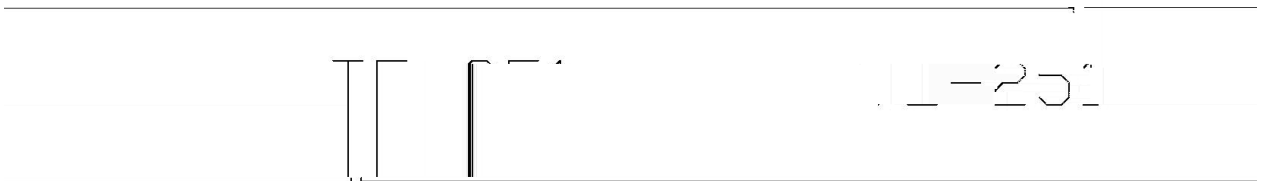



; >fl fl "fl fl Ž# : 2#( .35(#flfi( \*C%6#flC\*(flŁ%2fl ° \*6' #(%01;fi8D4(##>fl

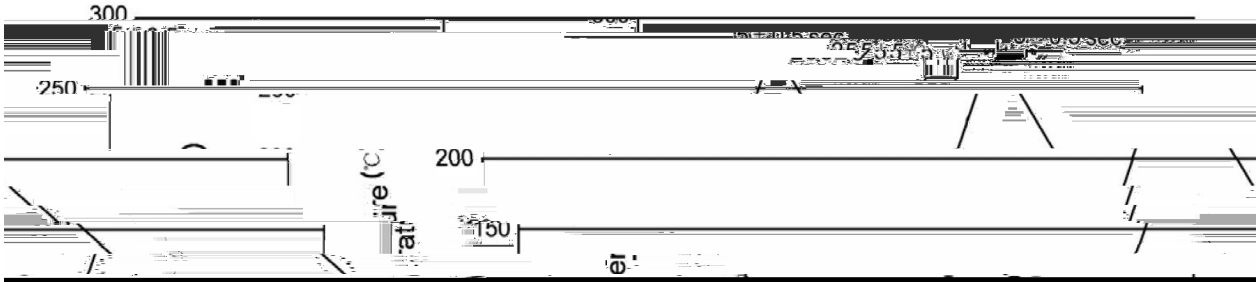

- |   |        |           |   |
|---|--------|-----------|---|
| 1 | 25 150 | 60 90sec; | Note:<br>1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5  | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec.       |
| 3 | 2 10   | /sec.     | 3. Cooling Speed: 2~10 /s□                    |