

Rev.A Jun.-2022




Rev.A Jun.-2022

SOT-23 N MOS
N- CHANNEL MOSFET in a SOT-23 Plastic PackageA






Rev.A Jun.-2022


Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	20	V
Gate-Source Voltage	V_{GSS}	± 8	V
Drain Current – Continuous	I_D	3.0	A
Pulsed Drain Current	I_{DM}	10	A
Continuous Source Current	I_S	0.95	A
Power Dissipation	P_D	0.9	W
Storage Temperature			



Rev.A Jun.-2022

PLANO DE DETALHE DO PISO DE CONCRETO ARMADO

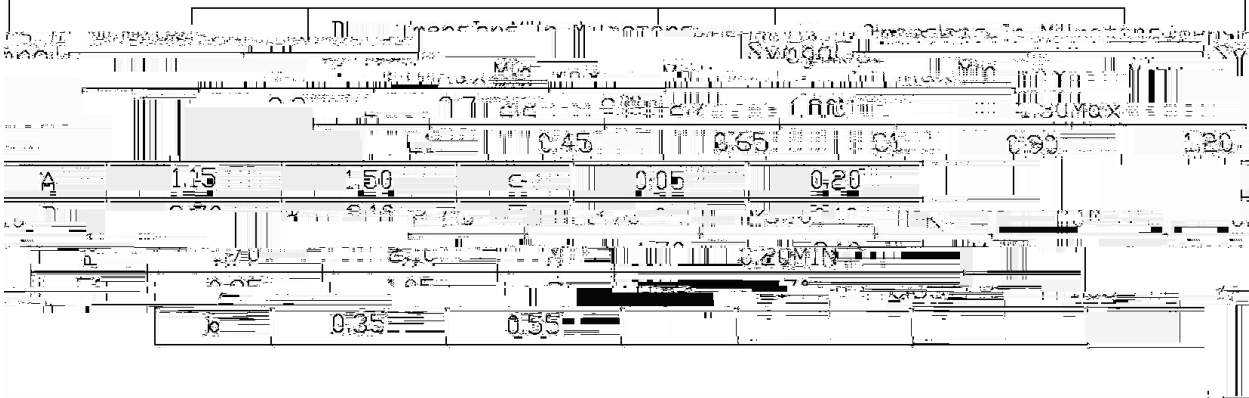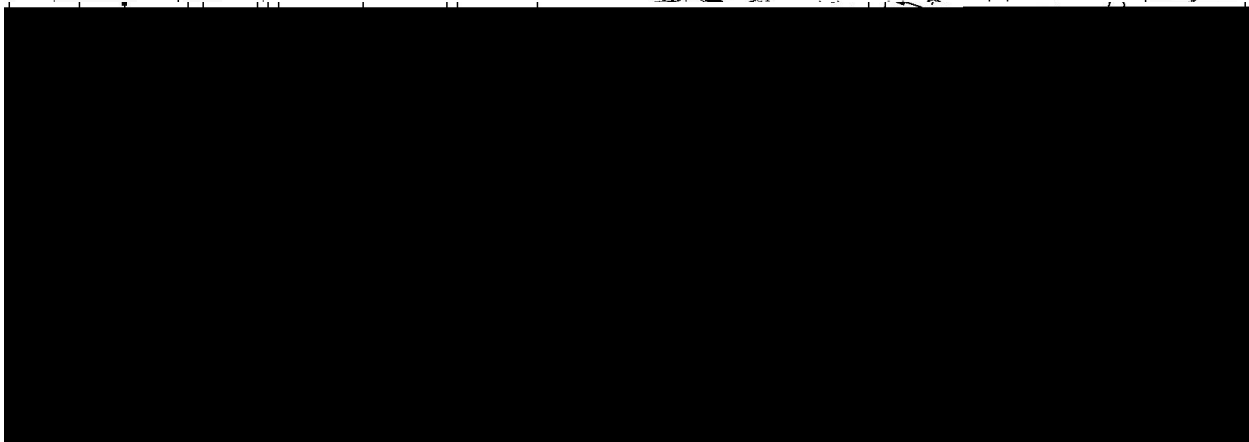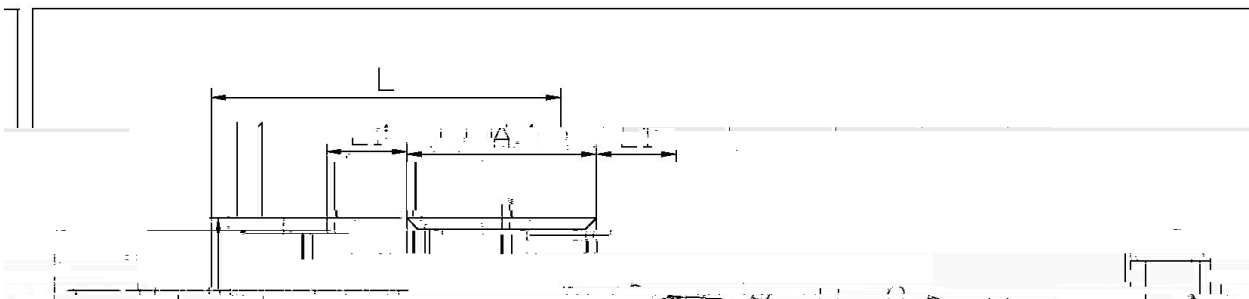

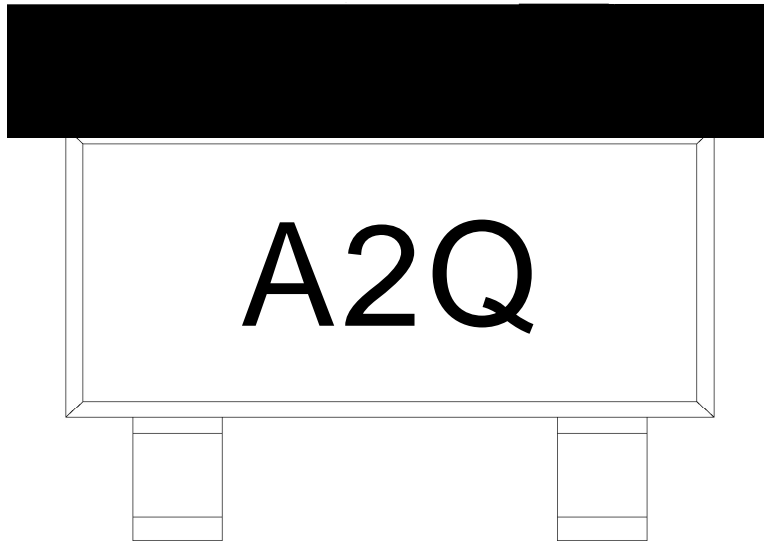

A2:

Q

Note:

A2 Product Type Code

Q: Automobile halogen-free product Code



kgdl Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- 1 150 200 60 120sec; 1.Preheating:150~200°C, Time:60~120sec.
- 2 255±5 5±0.5sec; 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
- 3 2 10°C/sec. 3. Cooling Speed: 2~10°C/sec.

7 J T J E 4 0 9 I 5 9 5 . 2 0 . 0 9 4 6 0 0 T m / F 8