



		fi	fl t i t ž	ž !	" #
			\$ % *	! & ~ ' () + , -	. / 0

Rev.A Jun.-2022

http://



Sl



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	100	109		V



/

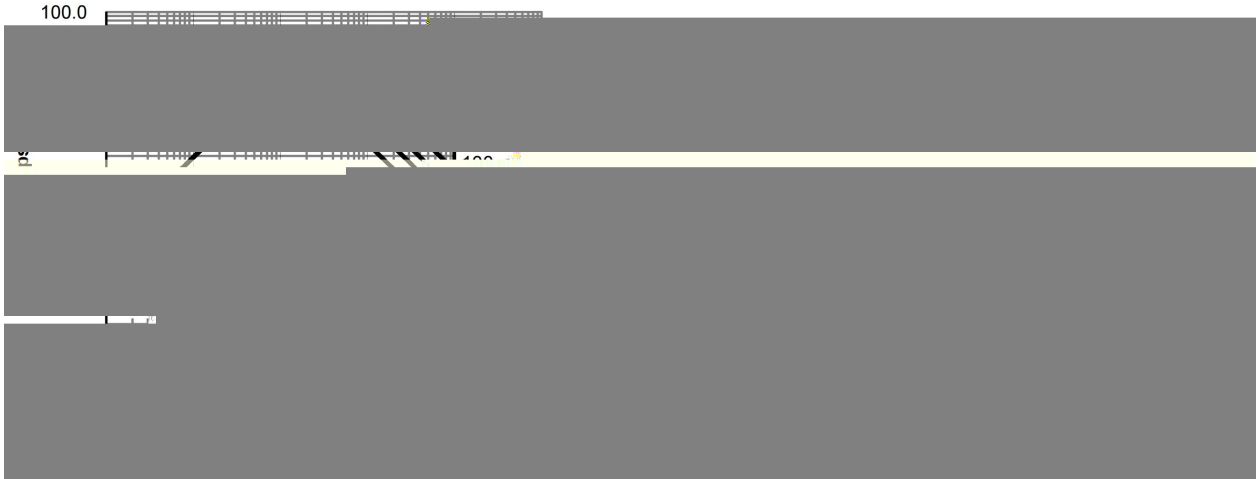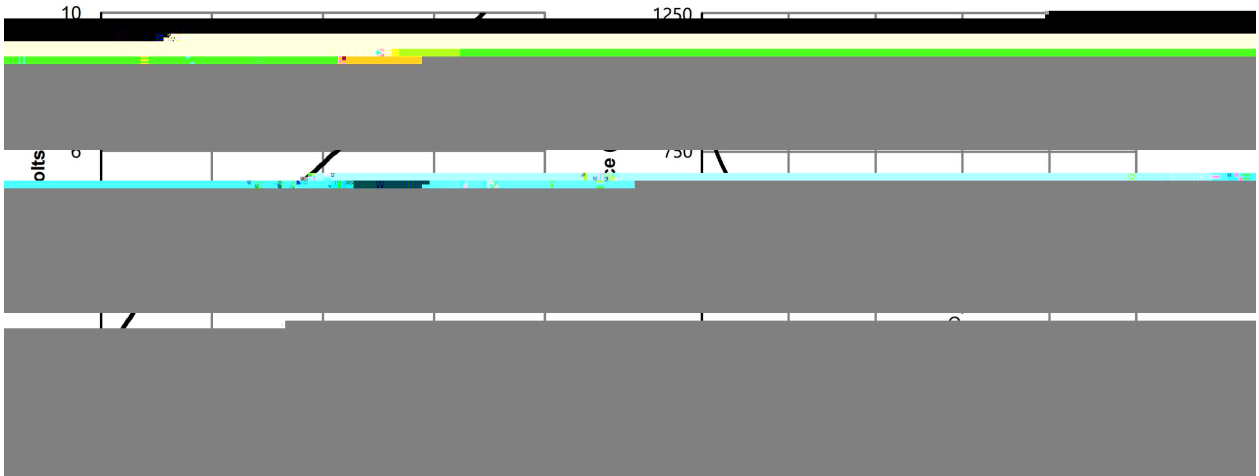

Rev.A Jun.-2022



PDFN3X3A

Unit:mm



BR 250N10S

BR

250N10S

Note:

BR: Company Code

250N10S: Product Type Code

****: Lot No. Code, code change with Lot No



Temperature Profile for IR Reflow Soldering(Pb-Free)

- | | | | | | | |
|---|-------|-----|----|-----------|-------|--|
| 1 | 150 | 180 | 60 | 90sec; | Note: | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | | 2 | 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

260±5