

BRCS350P06DP



DATA SHEET

P

±

		μ				
		μ				

BRCS350P06DP

/ Electrical Characteristic Curve






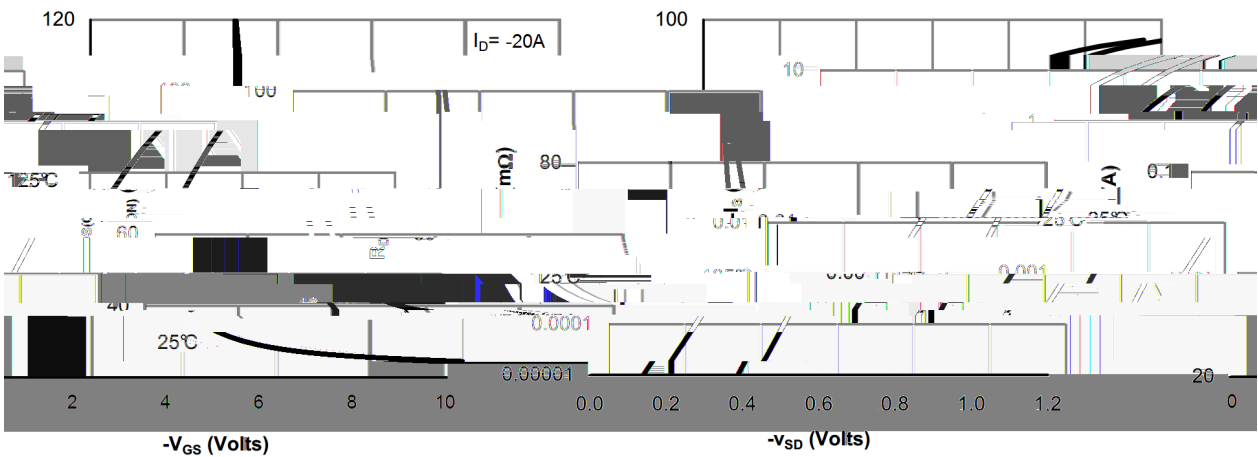



Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics

/ Electrical Characteristic Curve

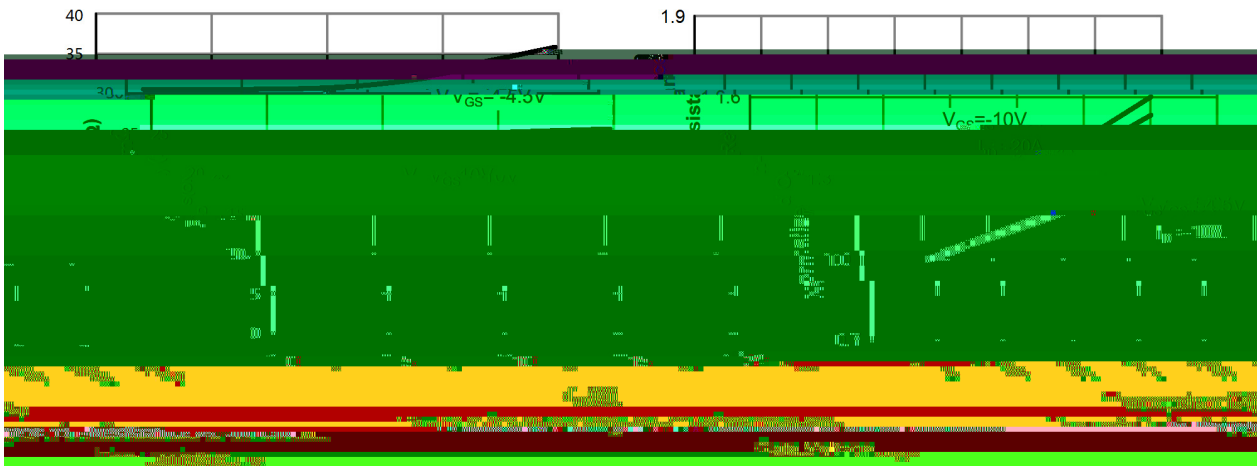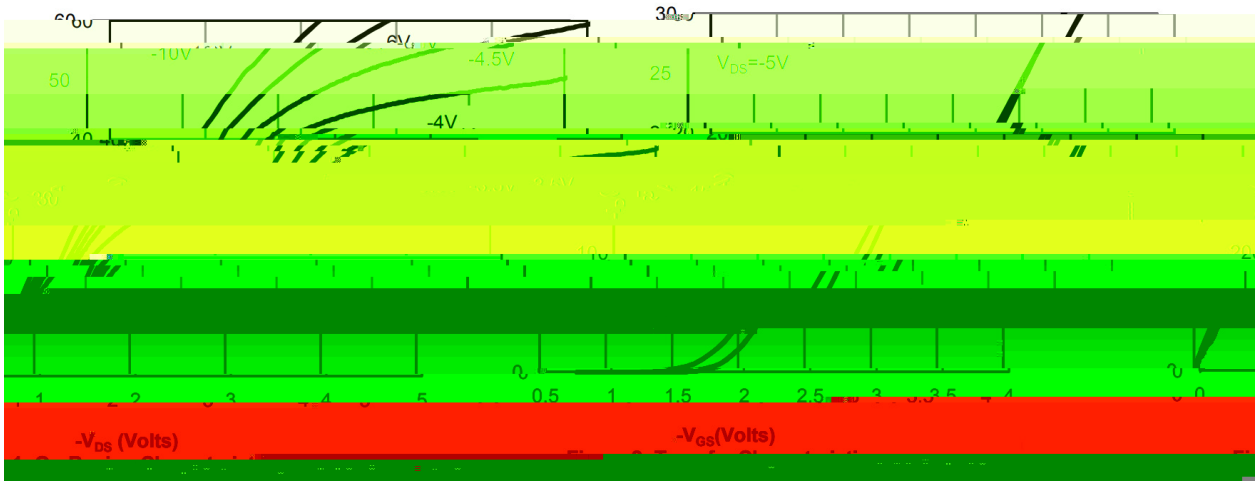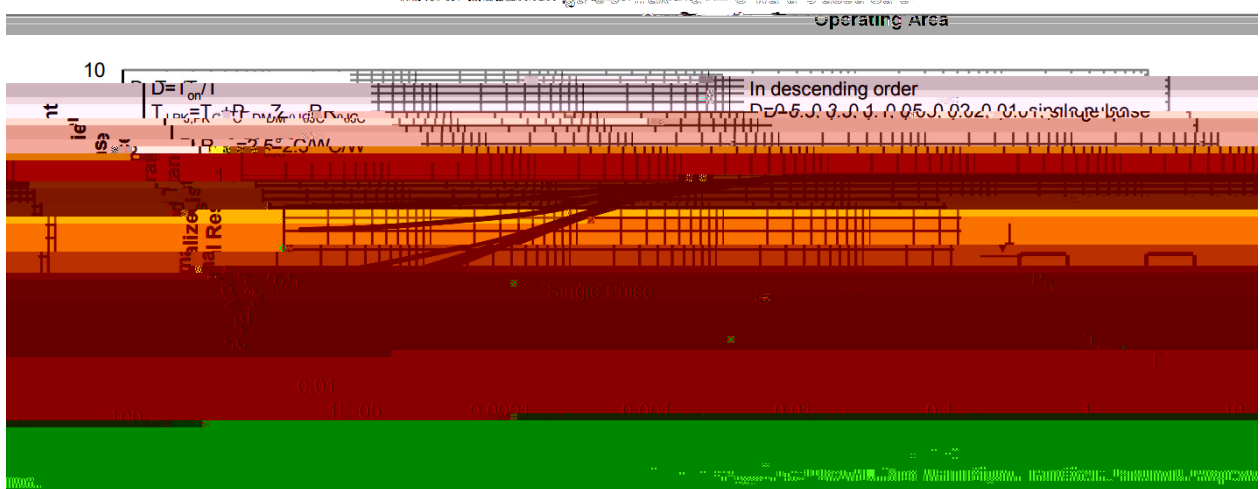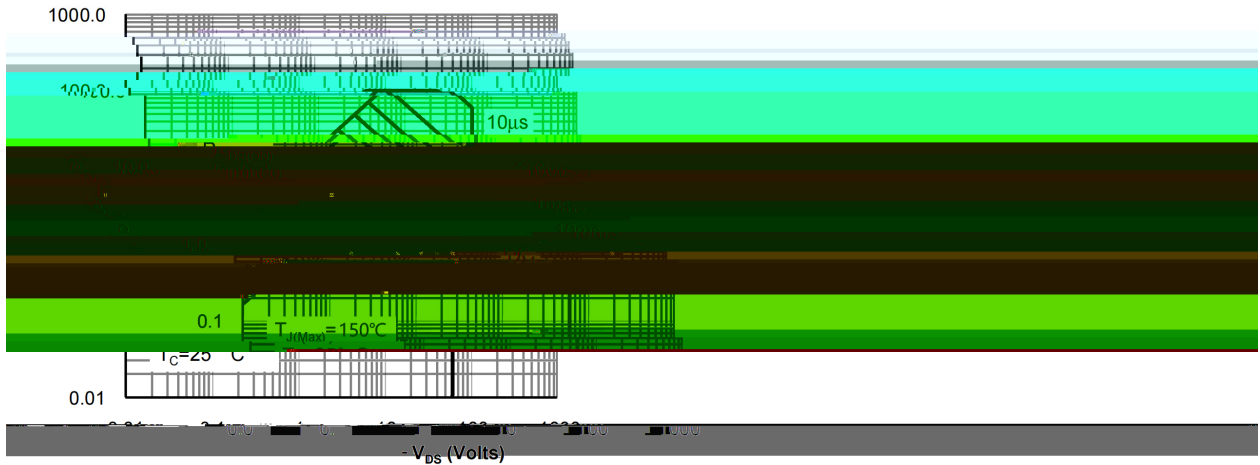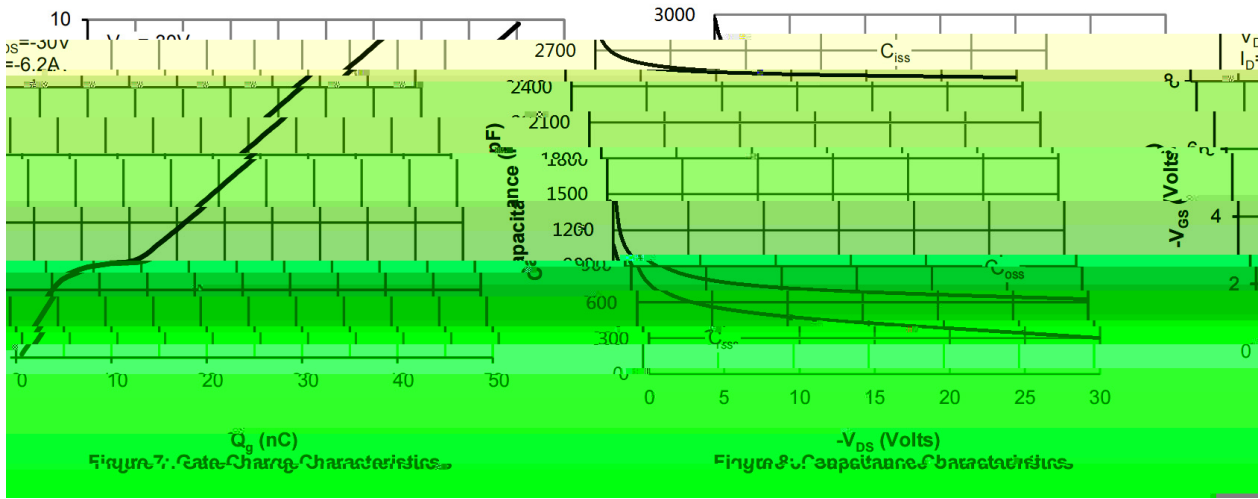

/ Package Dimensions

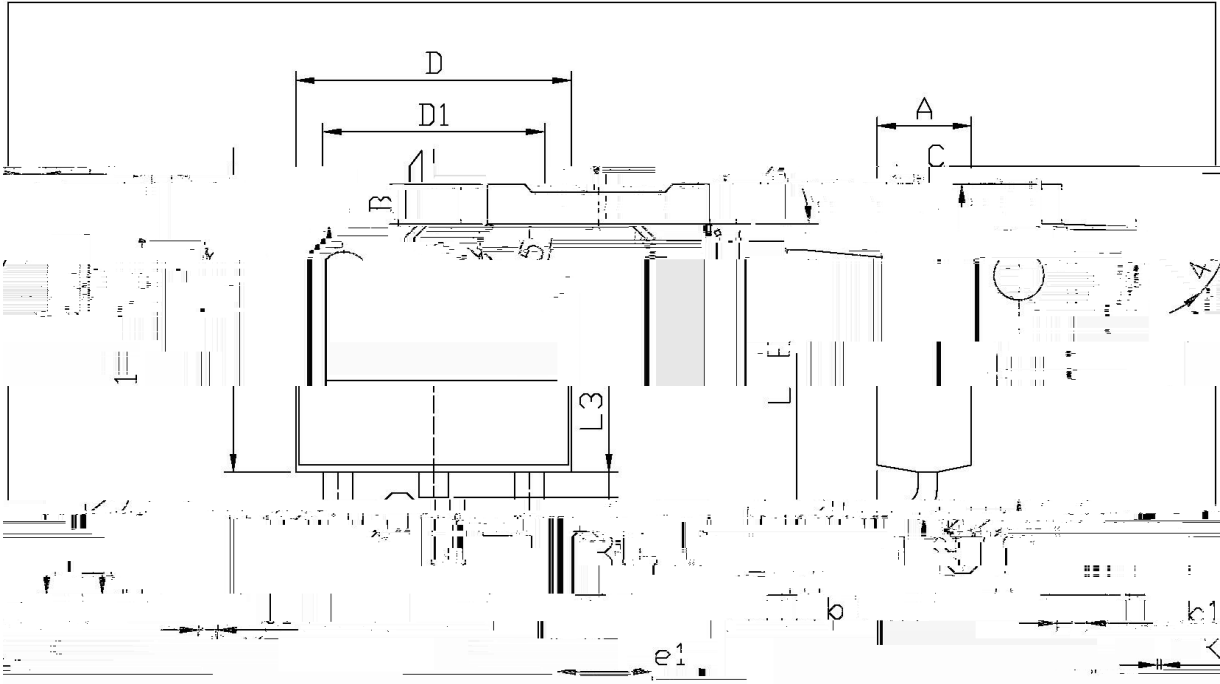


单位: mm

Dimensions, Millimeters		Symbol		Dimensions, In Millimeters		Symbol	
Min	Max	Min	Max	Min	Max	Min	Max
2.24	2.34	B	0.95	1.25	e1	4.73	4.73
4.73	4.73	b1	0.45	0.55	e2	5.50	5.50
0.00	0.10	CL	6.75	6.75	0.60	0.60	
0.00	0.10		0.00	5.10	5.50		

-252


T0

/ Marking Instructions

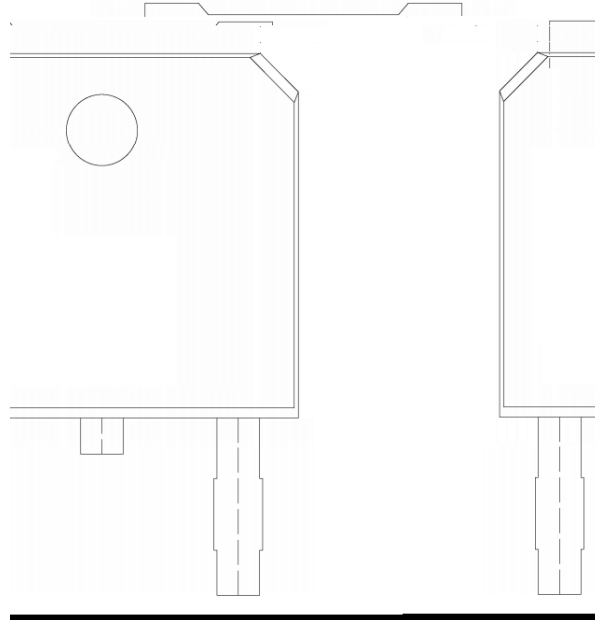

350P06

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

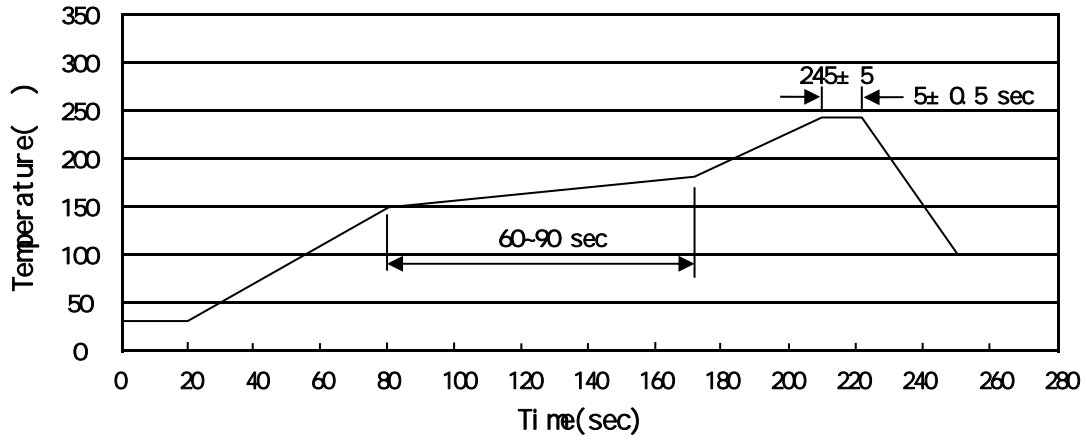

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices