



TO-252 N MOS N-CHANNEL MOSFET in a TO-252 Plastic Package.


Fast switching, low on resistance, low gate charge, low reverse transfer capacitances.


Used in various power switching circuit for system miniaturization and higher efficiency .



PIN1 G PIN 2 D PIN 3 S PIN 4 D

See Marking Instructions.

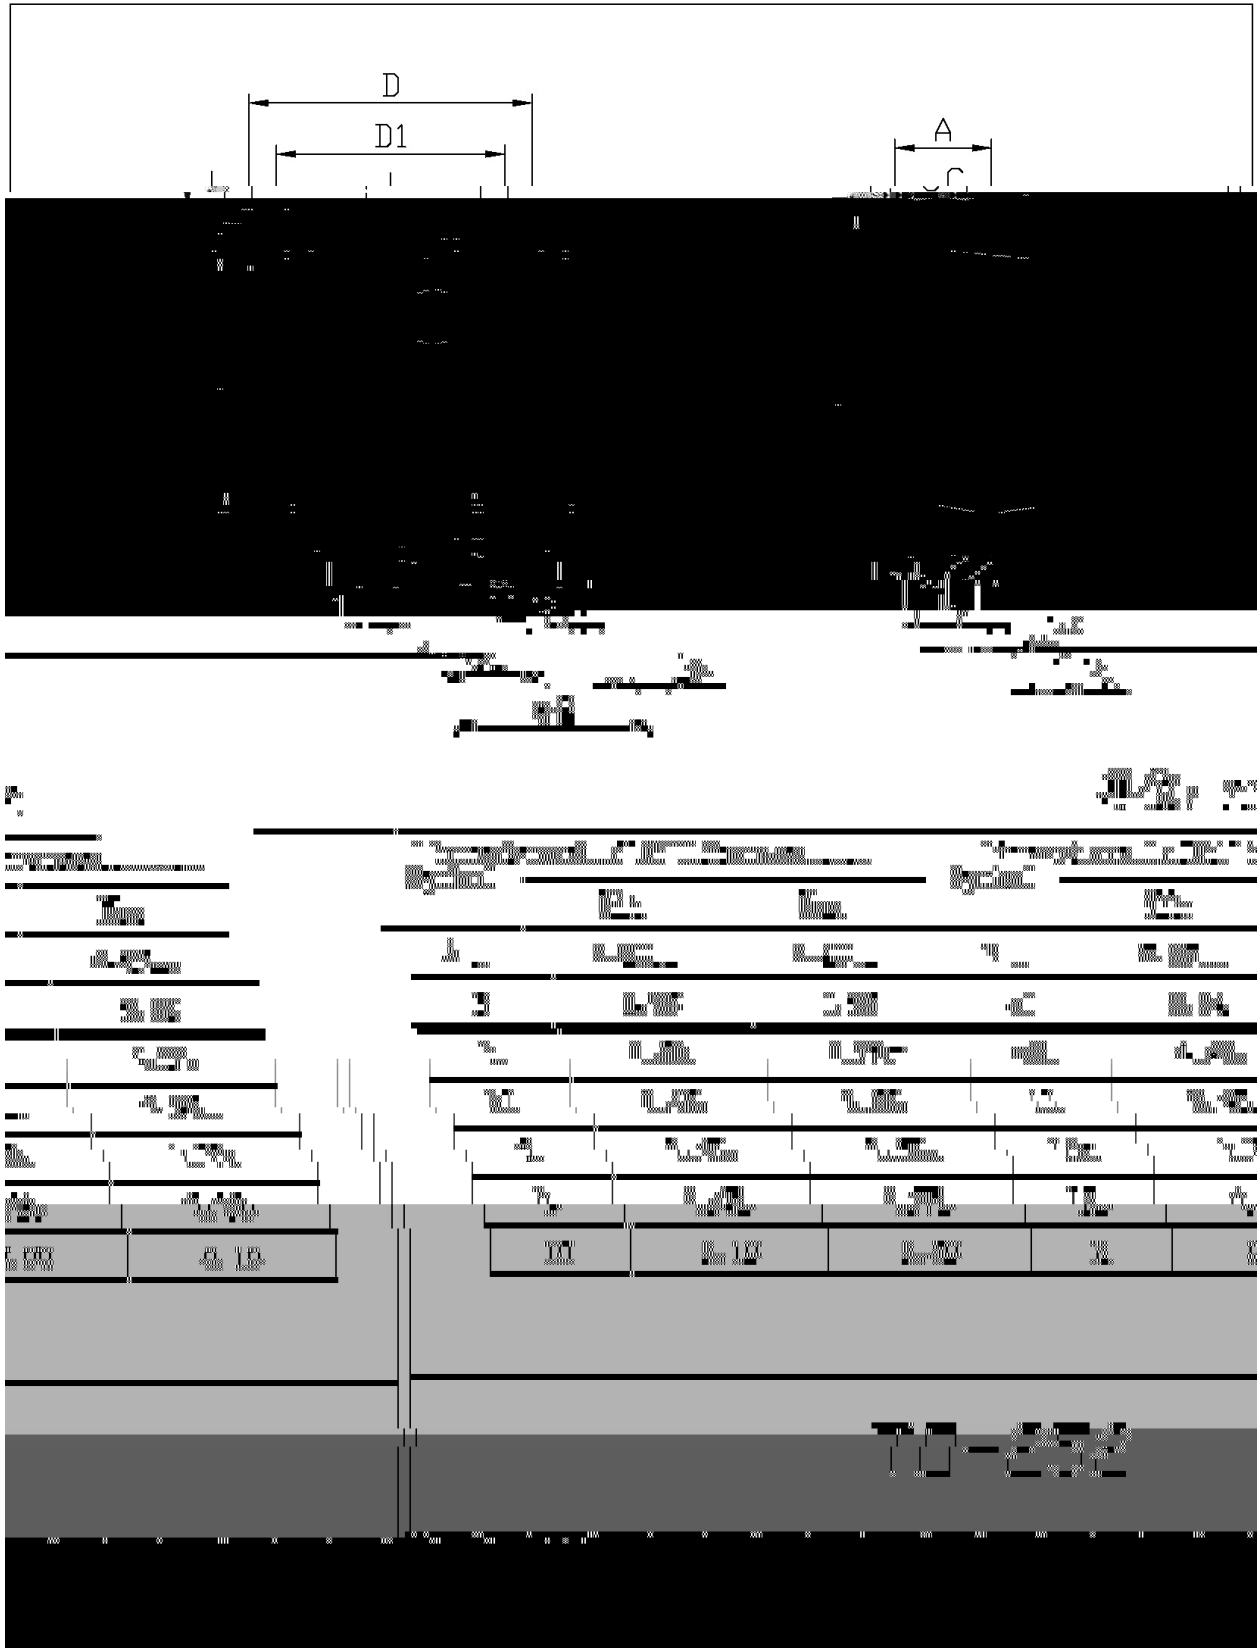

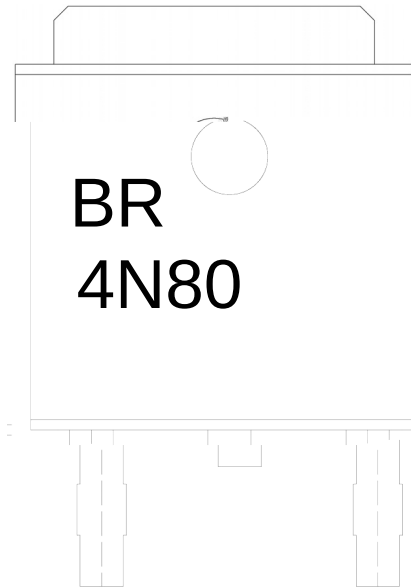


BR
4N80

Note:

BR: Company Code

4N80: Product Type.

****: Lot No. Code, code change with Lot No.

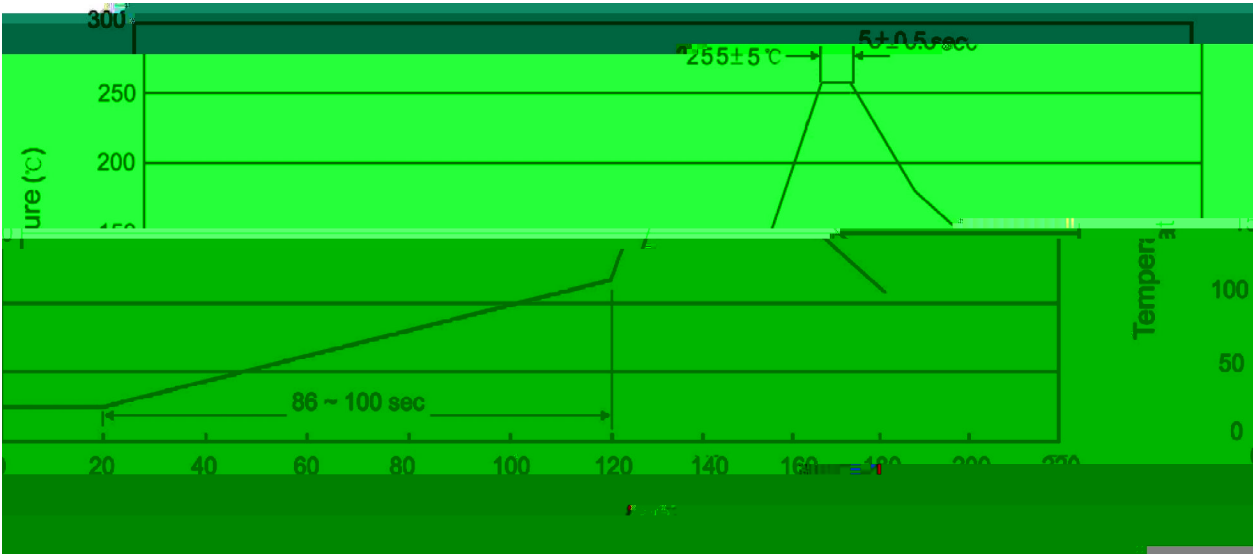

Note:

- | | | | | | |
|---|-----|-----|----|---------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255 | 5 | 5 | 0.5sec; | 2.Peak Temp.:255 5 , Duration:5 0.5sec. |
| 3 | | | | | |