

**BRCS50N06DP**



/ Electrical Characteristics(Ta=25 )


/ Electrical Characteristic






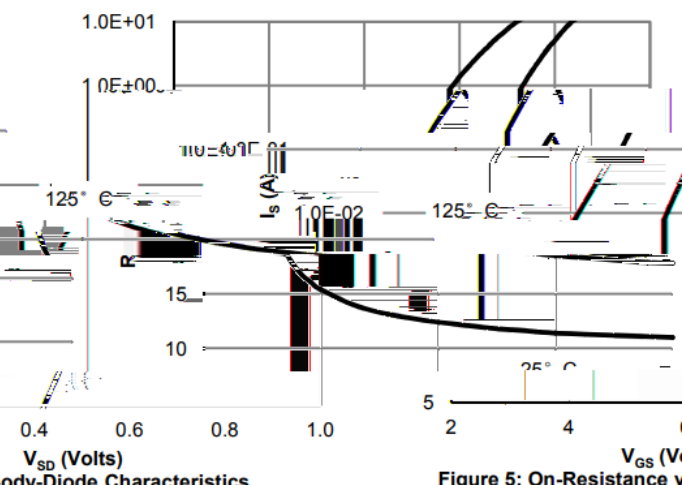


Figure 5: On-Resistance vs. Gate-Source Voltage


Figure 6: Body-Diode Characteristics

Figure 5: On-Resistance vs. Gate-Source Voltage

/ Electrical Characteristic Curve

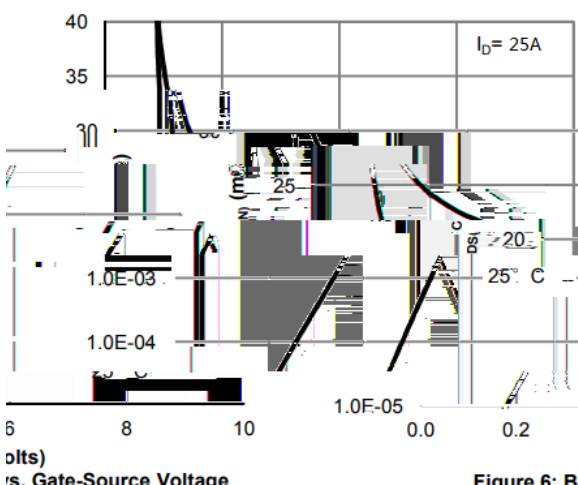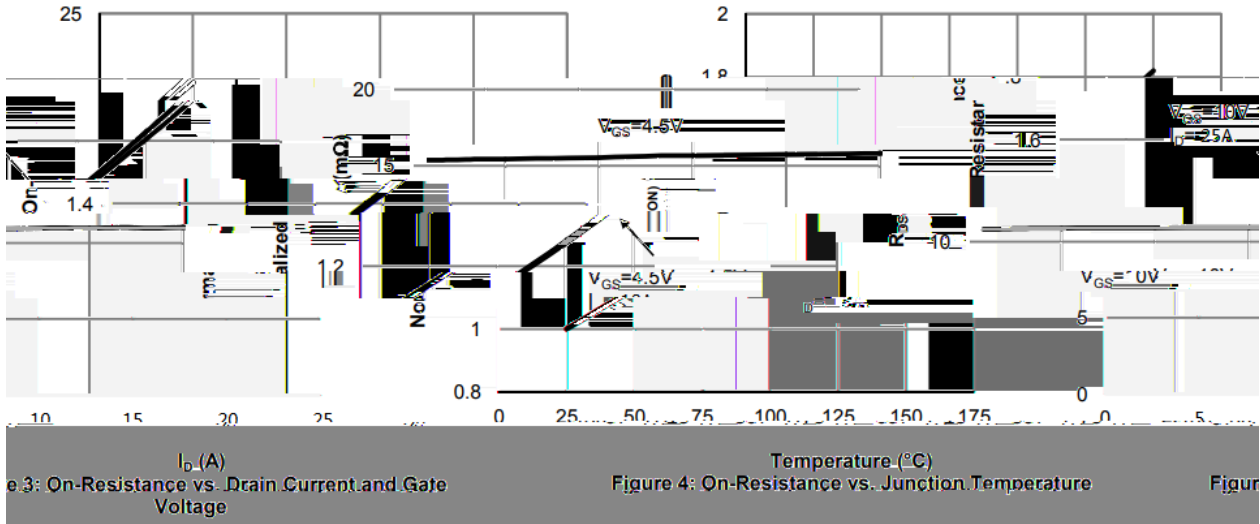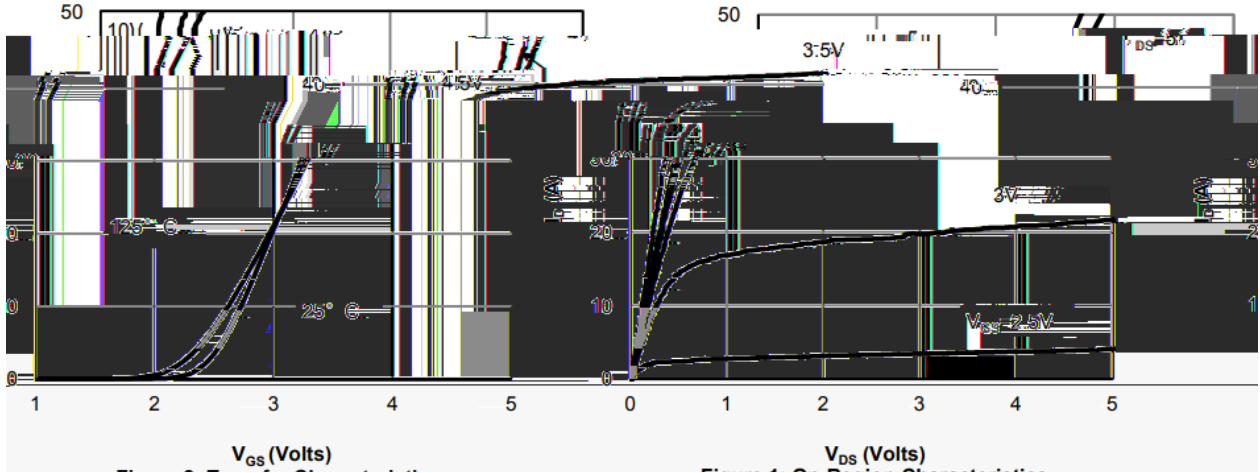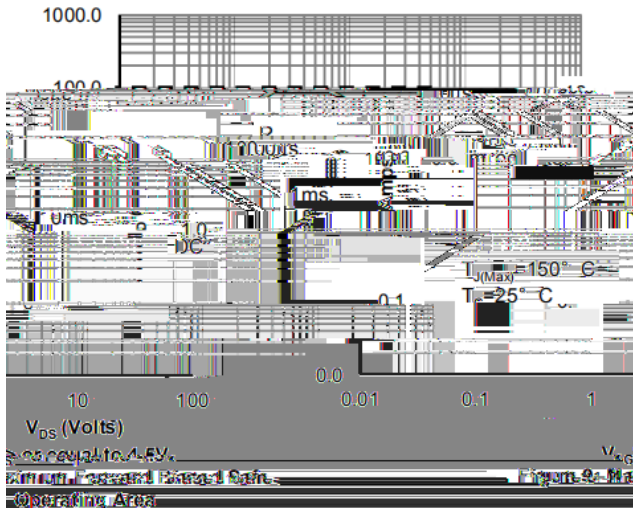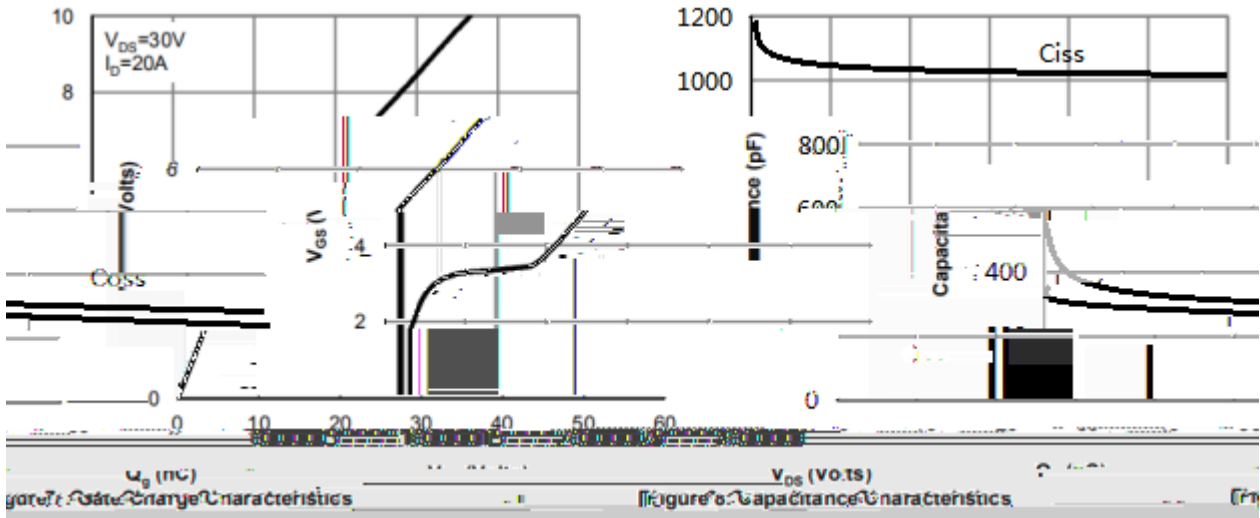

/ Package Dimensions

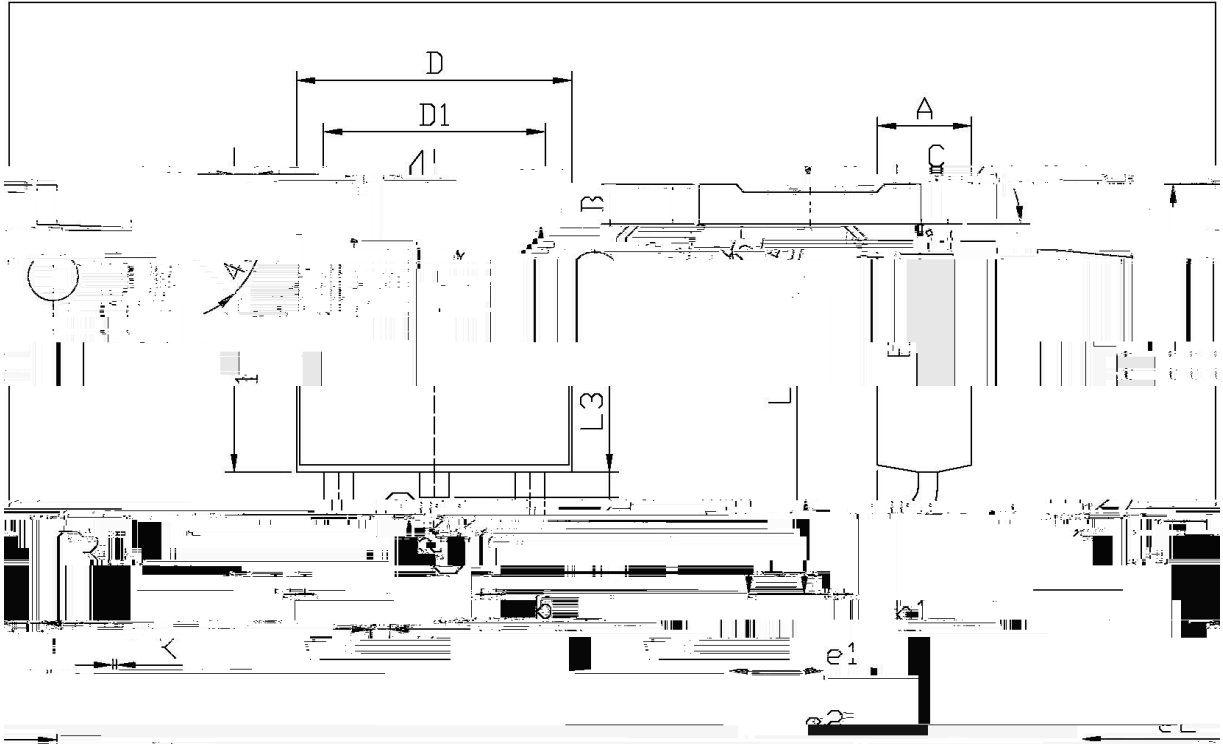


单位: mm

Dimensions		Millimeters		Dimensions		In Millimeters	
Min	Max	Symbol	Min	Max	Symbol	Min	Max
2.24	2.34	B	0.95	1.25	e1		
4.39	7.3	h1	0.70	0.90			
10.35		h2	0.45	0.55			0.85
0.60	0.60		6.25	6.75	D1	5.10	

T0-252

/ Marking Instructions

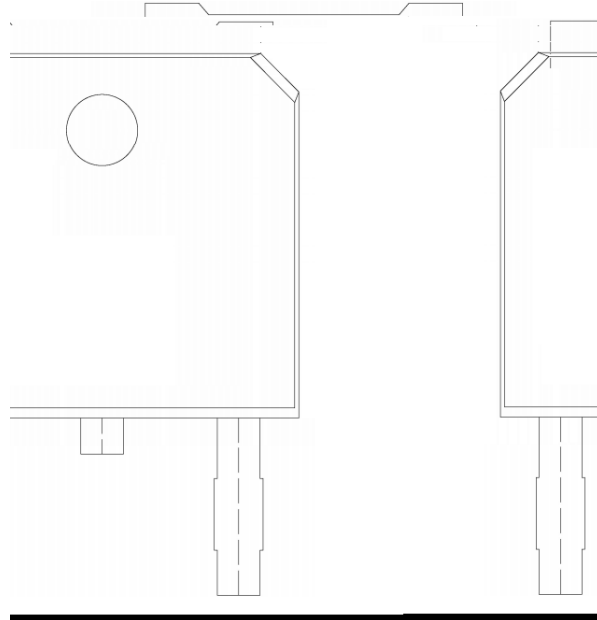

**BRCS50N06DP**