




BRD3N50

#


BRD3N50

BRD3N50

/ Electrical Characteristic Curve

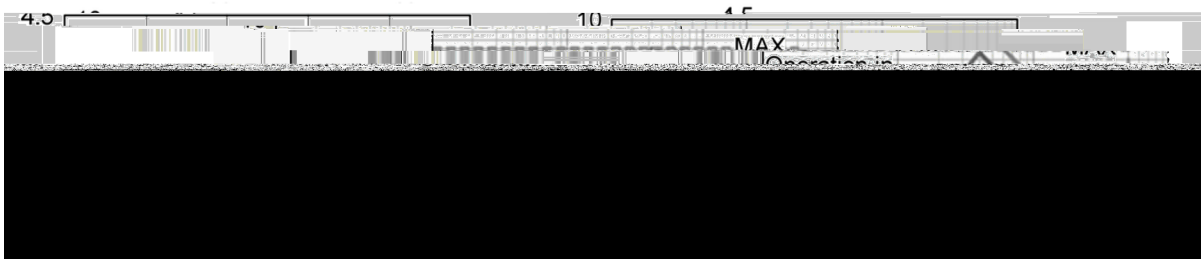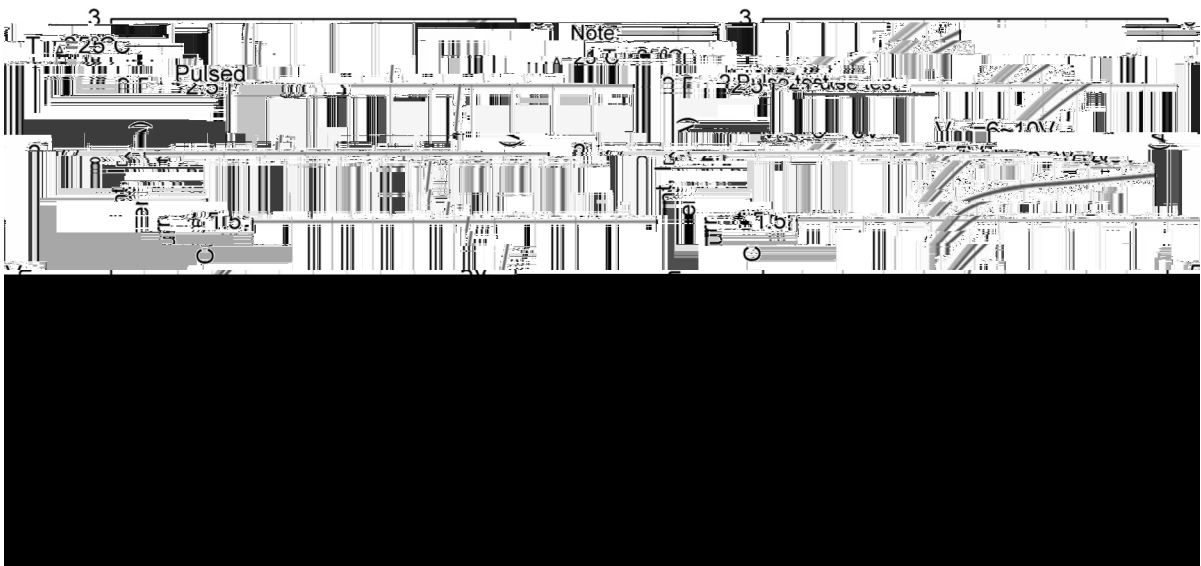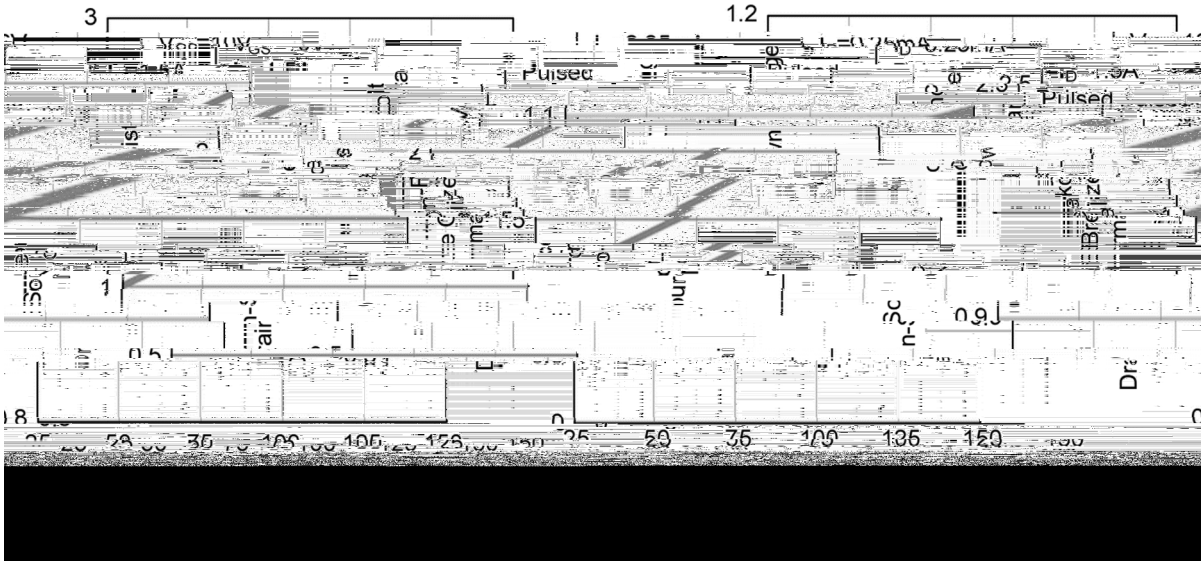

/ Package Dimensions

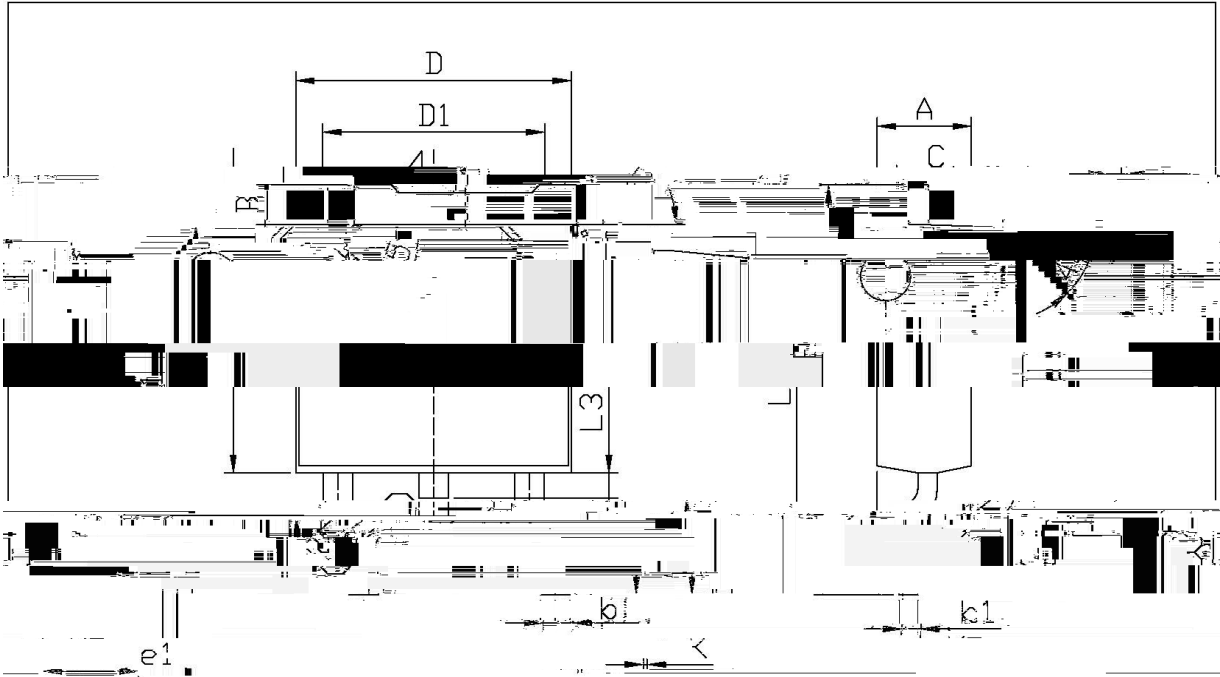


单位: mm

Dimensions, Millimeters		Dimensions, In Millimeters	
Min	Max	Min	Max
2.34		0.95	1.25
0.72		0.70	0.88
0.75		0.75	0.95
0.45		0.55	1.50
6.25	6.75	0.60	0.00
D1	5.10	5.50	K
		0.70	0.10

T0-252

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

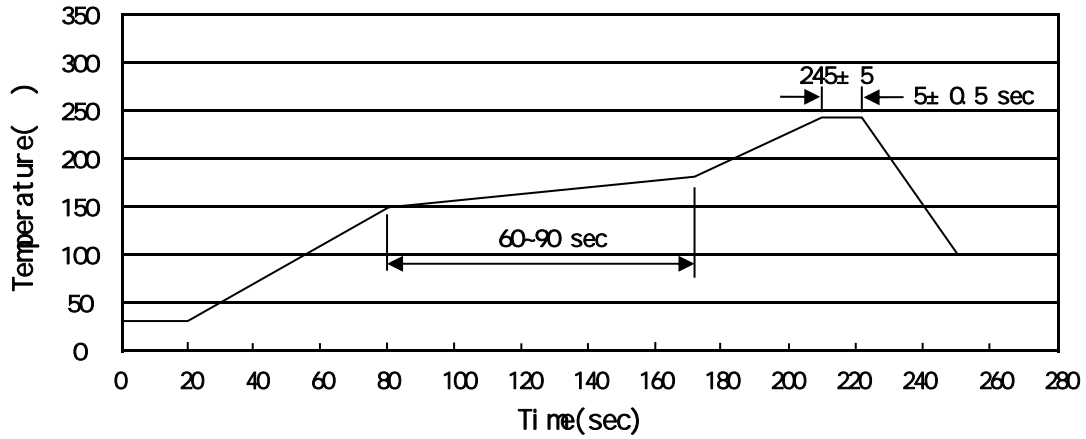

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			

	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
	/	/	/	/	/			

/ Notices