



BRES3V3X1C2ZA

--	--	--	--


DFN0603	ESD
---------	-----

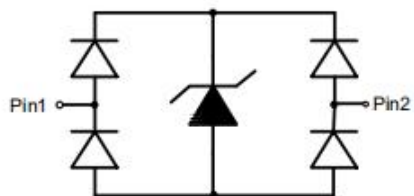

1 8

BRESD3V3X1C2ZA

/ Electrical Characteristics(Ta=25)

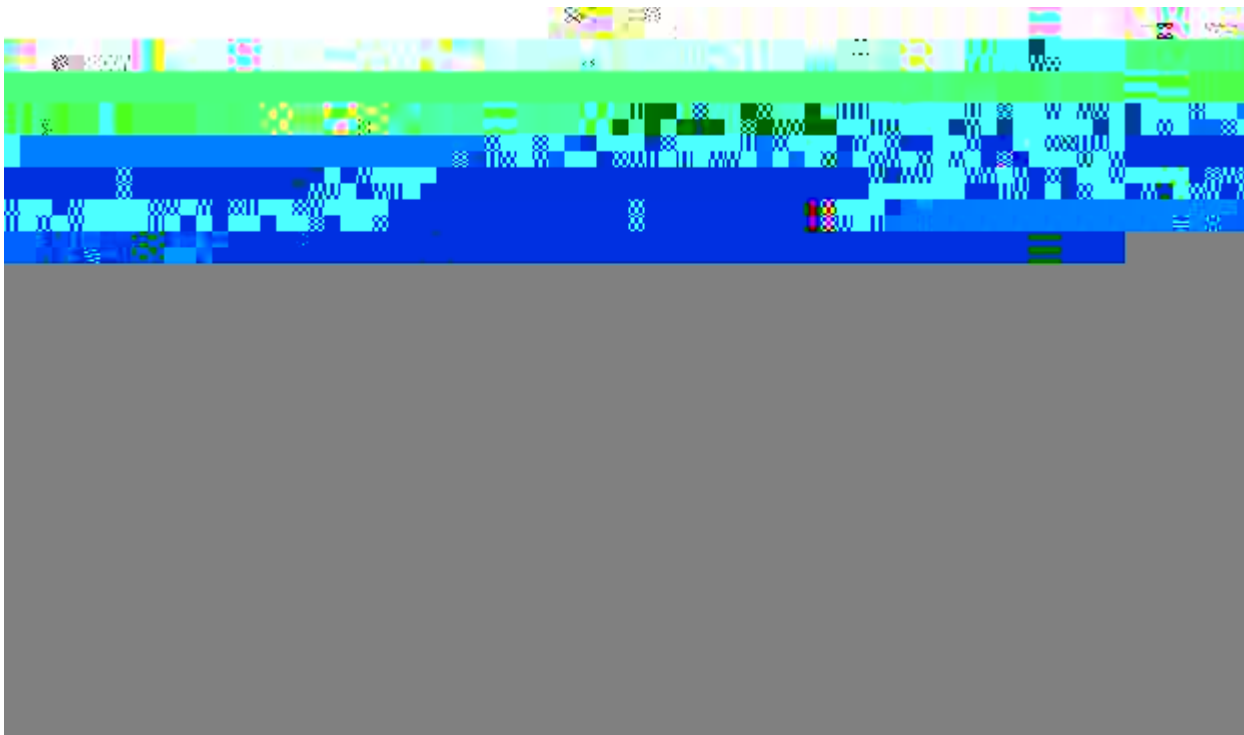



Definitions of electrical characteristics

- Notes:
- 1) TLP parameter: $Z0 = 50\Omega$, $tp = 100ns$, $tr = 2ns$, averaging window from 60ns to 80ns. RDYN is calculated from 4A to 16A.
 - 2) Contact discharge mode, according to IEC61000-4-2.
 - 3) Non-repetitive current pulse, according to IEC61000-4-5.

/ Electrical Characteristic Curve(Ta=25)



/ Electrical Characteristic Curve(Ta=25)

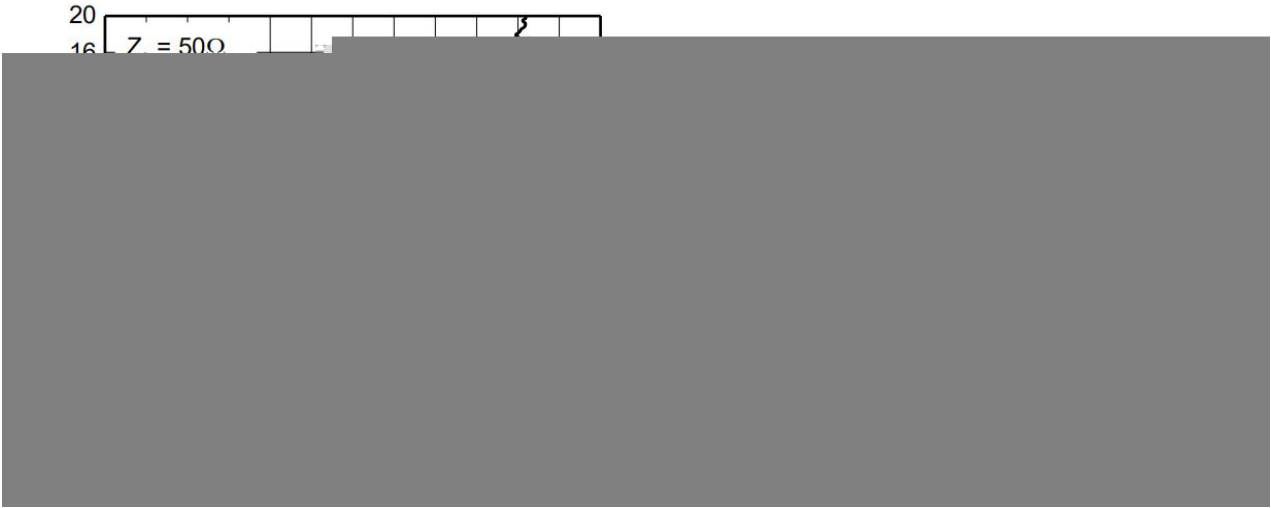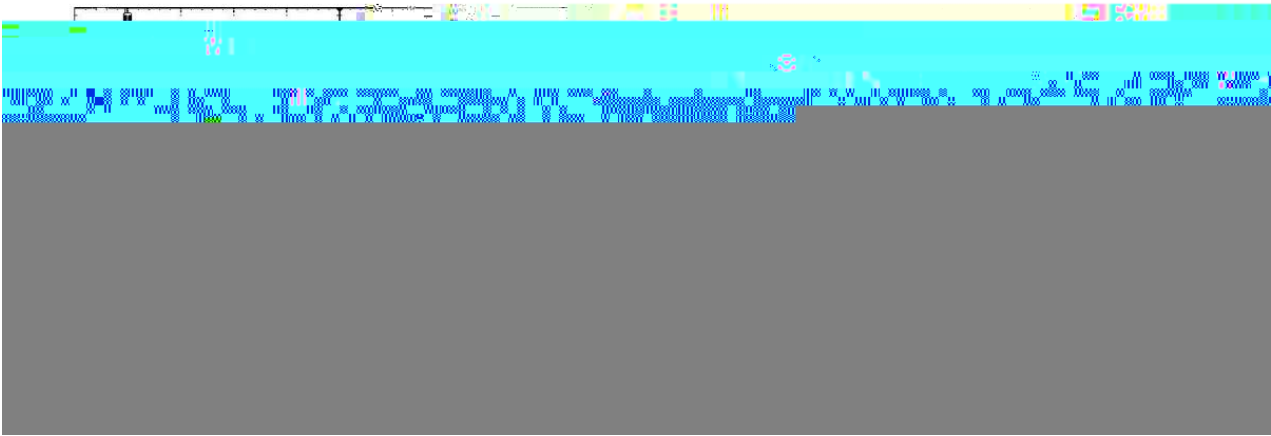


BRESD3V3X1C2ZA

DATA SHEET

/ Marking Instructions

U3
*

U

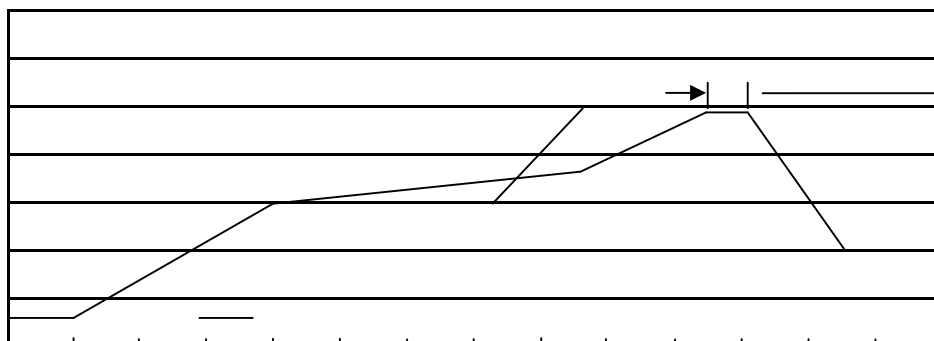
$$\begin{array}{ccccccc} & & & & ^\circ\text{C} & & \\ \pm & & \pm & & \pm & ^\circ\text{C} & \pm \\ & ^\circ\text{C} & & & & ^\circ\text{C} & \\ & & & & & & \end{array}$$
$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$

封装形式	包装数量					包装尺寸		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box 盒	Outer Box 箱
DFN0603-2L		10	100,000	6	600,000	7" × 8	180×120×180	390×385×205

8 8