

BRES D5V0L1B2Z-02

©2022



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

5 Ø / Dp

* , 4 . > / / x + 9 * 8 â o

603

60

/ " / Fb

Ý4 / x k 3 o 4 9 TYk t . æ 1 < Y k ' / +) . + 9 *
¾) k) í D } o

61

61000

6 > 3

61

]4]2 60,

61000

60

— ÷ / Ap

9 ô Ñ " ò 3 6 ny o A , Ñ ' Ô g ç i o

61

61


61

61

^ W] Ô • / EtCu



Û- æ / Pg

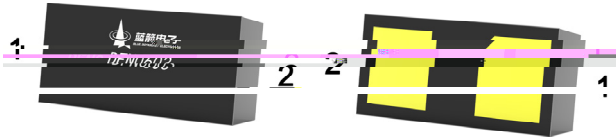

, M V / Mg

- ~ " Ç o 61

BRES5V0L1B2Z-02

©2022

Symbol	Parameter	Value	Unit
P_K	Power Dissipation	69	W
I_P	Peak Current	5.5	A
V_B	Base Voltage	-3	V
		-3	
T_J	Junction Temperature	100	°C

BRES5V0L1B2Z-02

©2022



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

0? d / EIC



BRES5V0L1B2Z-02

©2022



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

Ø/ =) ¢ / P Pin

DFN0603

Unit:mm



BRES5V0L1B2Z-02


©2022

DATA SHEET

BRES5V0L1B2Z-02

©2022

WD t ¢ (x /) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXO

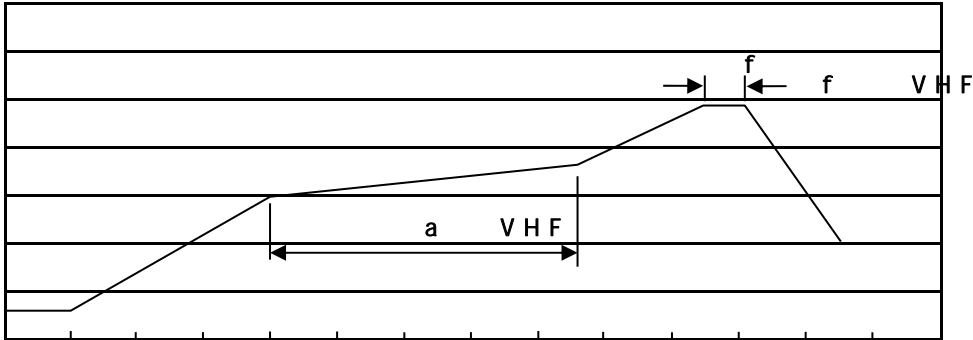

w WEF' %yb@

- 1. 10% - k 60% 1. 10% - k 60%
- 2. 24% - k 40% 5 r0. 2. 24% - k 40% 5 r0. 2.
- 3. 2% - k 2% 3. 2% - k 2%

D /C^a p fl »] / RESISTANCE

y 260 r5 - y 10 r1 s 260 ± 10 ±

G P Æ / PISPEC.

2 & x / R

7>B E	Units/Reel					Units/Outer Box		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
DFN0603-2L	15	10	150,000	4 000	600,000	s×8	210×205×205	445×230×435

— y / Nb