

DFN0603

ESD

DFN0603 Plastic Package 1-Line,Bi-directional , ESD Protection Diode.

Stand-off voltage: $\pm 5V$ Max.

Transient protection for each line according to:

IEC61000-4-2(ESD): $\pm 30kV$ (contact).

IEC61000-4-4 (EFT): 40A (5/50ns).

IEC61000-4-5(surge): 8A (8/20 μs).

Ultra-low capacitance: $C_J = 10pF$ typ.

Low leakage current.

Low clamping voltage: $V_{CL} = 10.0V$ typ. @ $I_{PP} = 16A$ (TLP).

Solid-state silicon technology.

HF Product.



Cellular handsets.

Tablets.

Laptops.

Other portable devices.


Network communication devices.

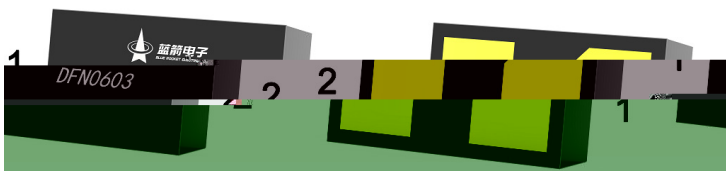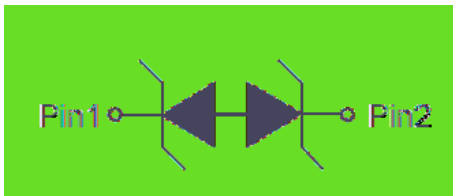


See Marking Instructions.

Parameter	Symbol	Rating	Unit
Peak Pulse Power($t_p = 8/20\mu s$)	P_{PK}	35	W
Peak Pulse Current($t_p = 8/20\mu s$)	IPP	8	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	KV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	125	
Operating temperature	T_{OP}	-40~85	
Lead temperature	T_L	260	
Storage Temperature	T_{STG}	-55~+150	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

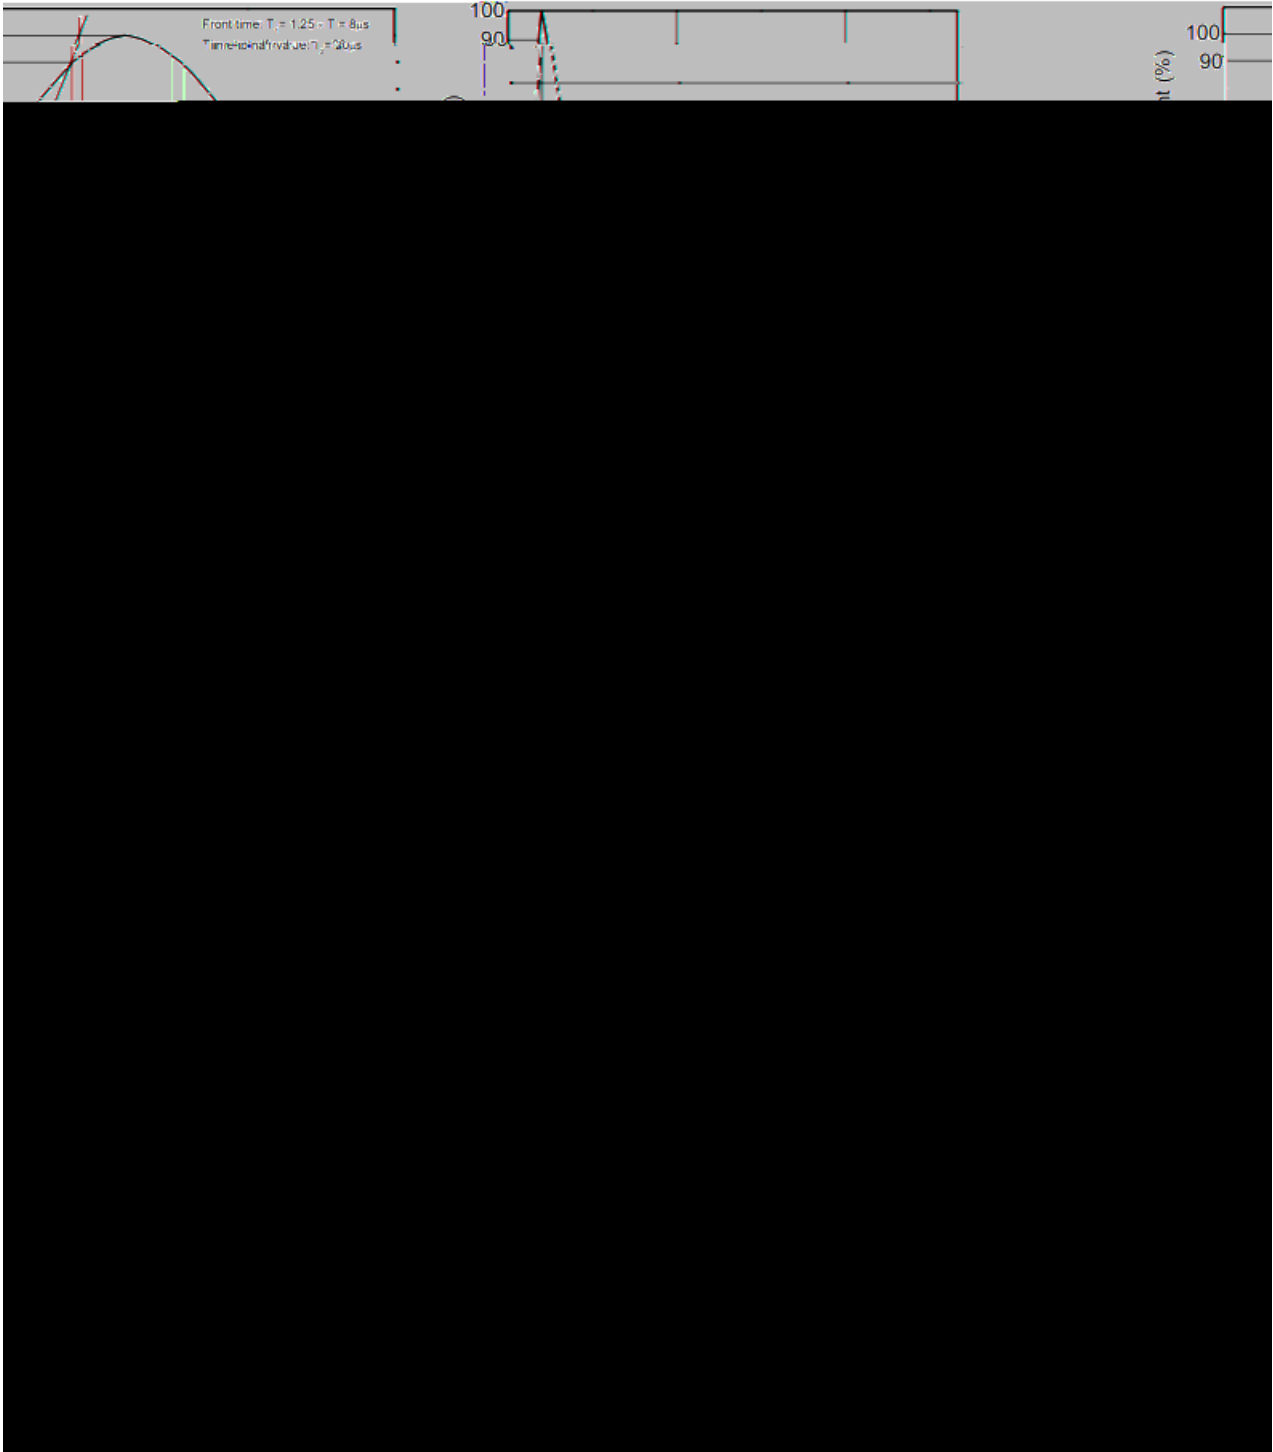

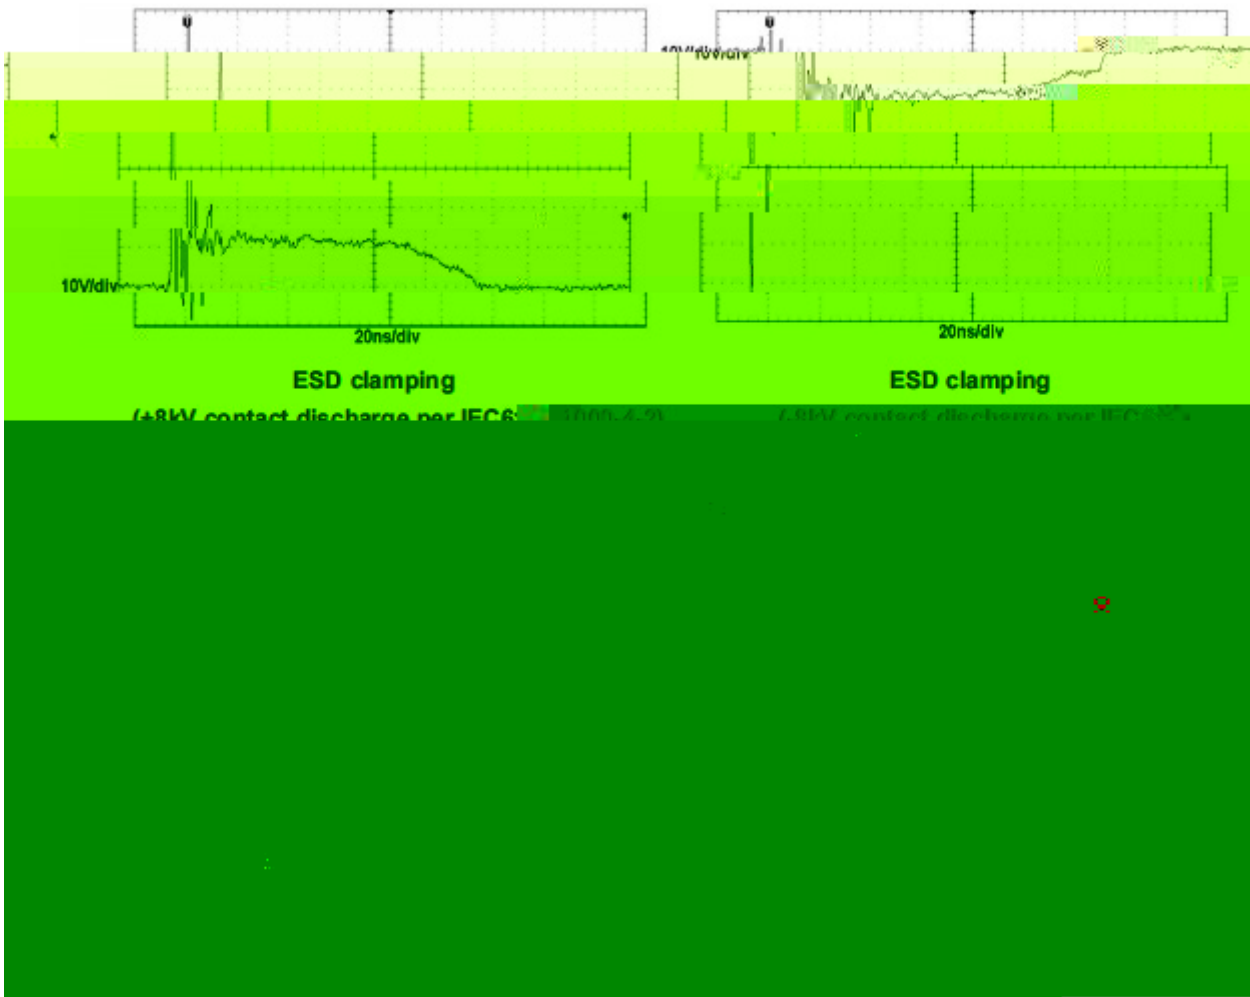

DFN0603

Unit:mm



Rev.02 202102



A5

Note

A5

Product Type Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | | |
|---|-----------|--------|-------------|---|
| 1 | 150 ~ 180 | | 60 ~ 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 ~ 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |