

BRES7V0L1B2ZP



!"#\$%&'()*+,-./:;<=;>?@ABCD EFGHIJKLMNOPQRSTUVWXYZ[\]^_`{|}~ DATA SHEET
#

#

版	
---	--

BRES7V0L1B2ZP

!"#\$%&'()*+,-./:;<=;>?@ABCD EFGHIJKLMNOPQRSTUVWXYZ[\]^_`{|}~ DATA SHEET



# =?4?7 , 4#	# GY736#	# ?,&B#	# W& ,#
= ?A#=%2 #=60 4Q,-#X#U/()V2R#	=-^#	IU#	_#



Definitions of electrical characteristics

=?4?7 , 4#


BRES7V0L1B2ZP



#

/ Electrical Characteristic Curve(Ta=25)

#

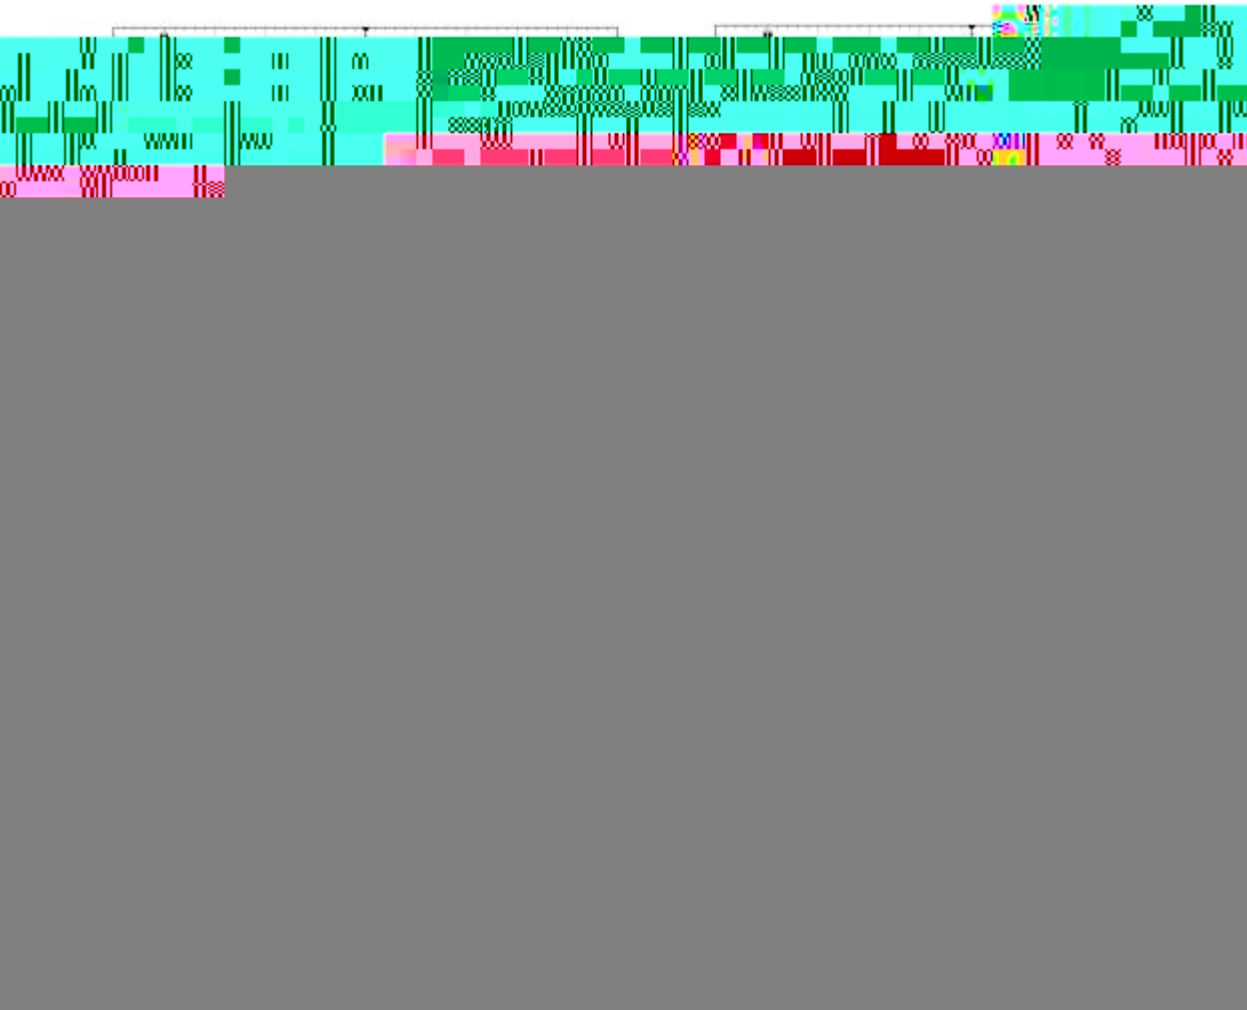


#



#

/ Package Dimensions

#

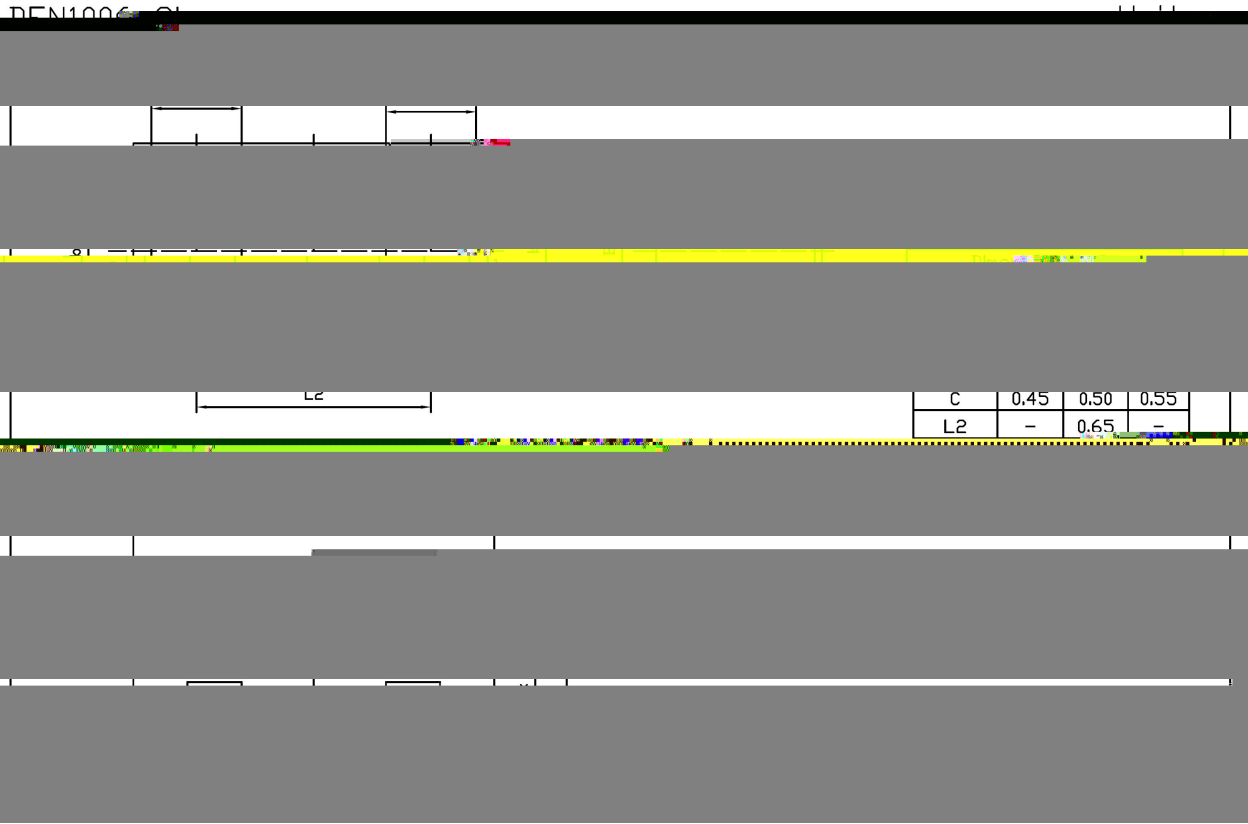

BRES7V0L1B2ZP



!"#\$%&'()*+,-./:;<=>?@ABCDEFGHIJKLMNPQRSTUVWXYZ[\]^_`{|}~ DATA SHEET

#





BRES7V0L1B2ZP

!"#\$%&'()*+,-./:;<=>?@ABCDEFGHIJKLMNPQRSTUVWXYZ[\]^_`{|}~ DATA SHEET

#

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

: 6, .#
 * *T) *U) ;) e) 2 5f# # # *!=4 + ? ,&B.*T) `\*U)°C#M 7 . ; ) `e) 2 5!#
 ((PT±T°C T±)!T2 5f# # (!= ?A#M 7 -!. (PT±T°C#8%4? ,&6&.T±)!T2 5!#
 S (*)°C/2 5!# # # # S! O66%&B#G- E.#(`*)°C/2 5!#
 #

/ Resistance to Soldering Heat Test Conditions

 (;)±T°C# # *)±*#2 5!# # # M 7 -!. (;)HT°C# # M 7 .*)H*#2 5#
 #