BRG20N120D

DATA SHEET

/ Descriptions

WR06S ṂṂĿ ʌ ʎ ᴥ Ⅱ ờ ɥ ᒉ

/ Features

Ḩ Ⅱ ͽ U * □ ẙ ⩗ ͌Ω̹ Ḩت ⁼ ᴙ ں UrKV ғ ᵝ

/ Applications

ڴ ψ ᴴ ψ إ ᴴ ڿ j ڙ Ă ͽ ◊

/ Equivalent Circuit



/ Pinning



χ χ χ

/ h_{FE} Classifications & Marking

♁ ᴍ ˥ ب ˝

v ˝Ω̧	˦ ᴺ	˝Ω̧ Ӫ	D Ʝ

v ˝Ω̧	˦ ᴺ	╜ ؛ᛡ Ţ	ῳ ṇ Ӫ	Ɛ ʒ Ӫ	ῳ ᙆ Ӫ	D Ʝ

V ῞Ω̨	Ɏ ᴺ	╜ ⁏ᛏ Ţ	ῳ ṇ Ӫ	Ɛ ʓ Ӫ	ῳ ᶻ Ӫ	ᴅ Ӈ

/ Marking Instructions

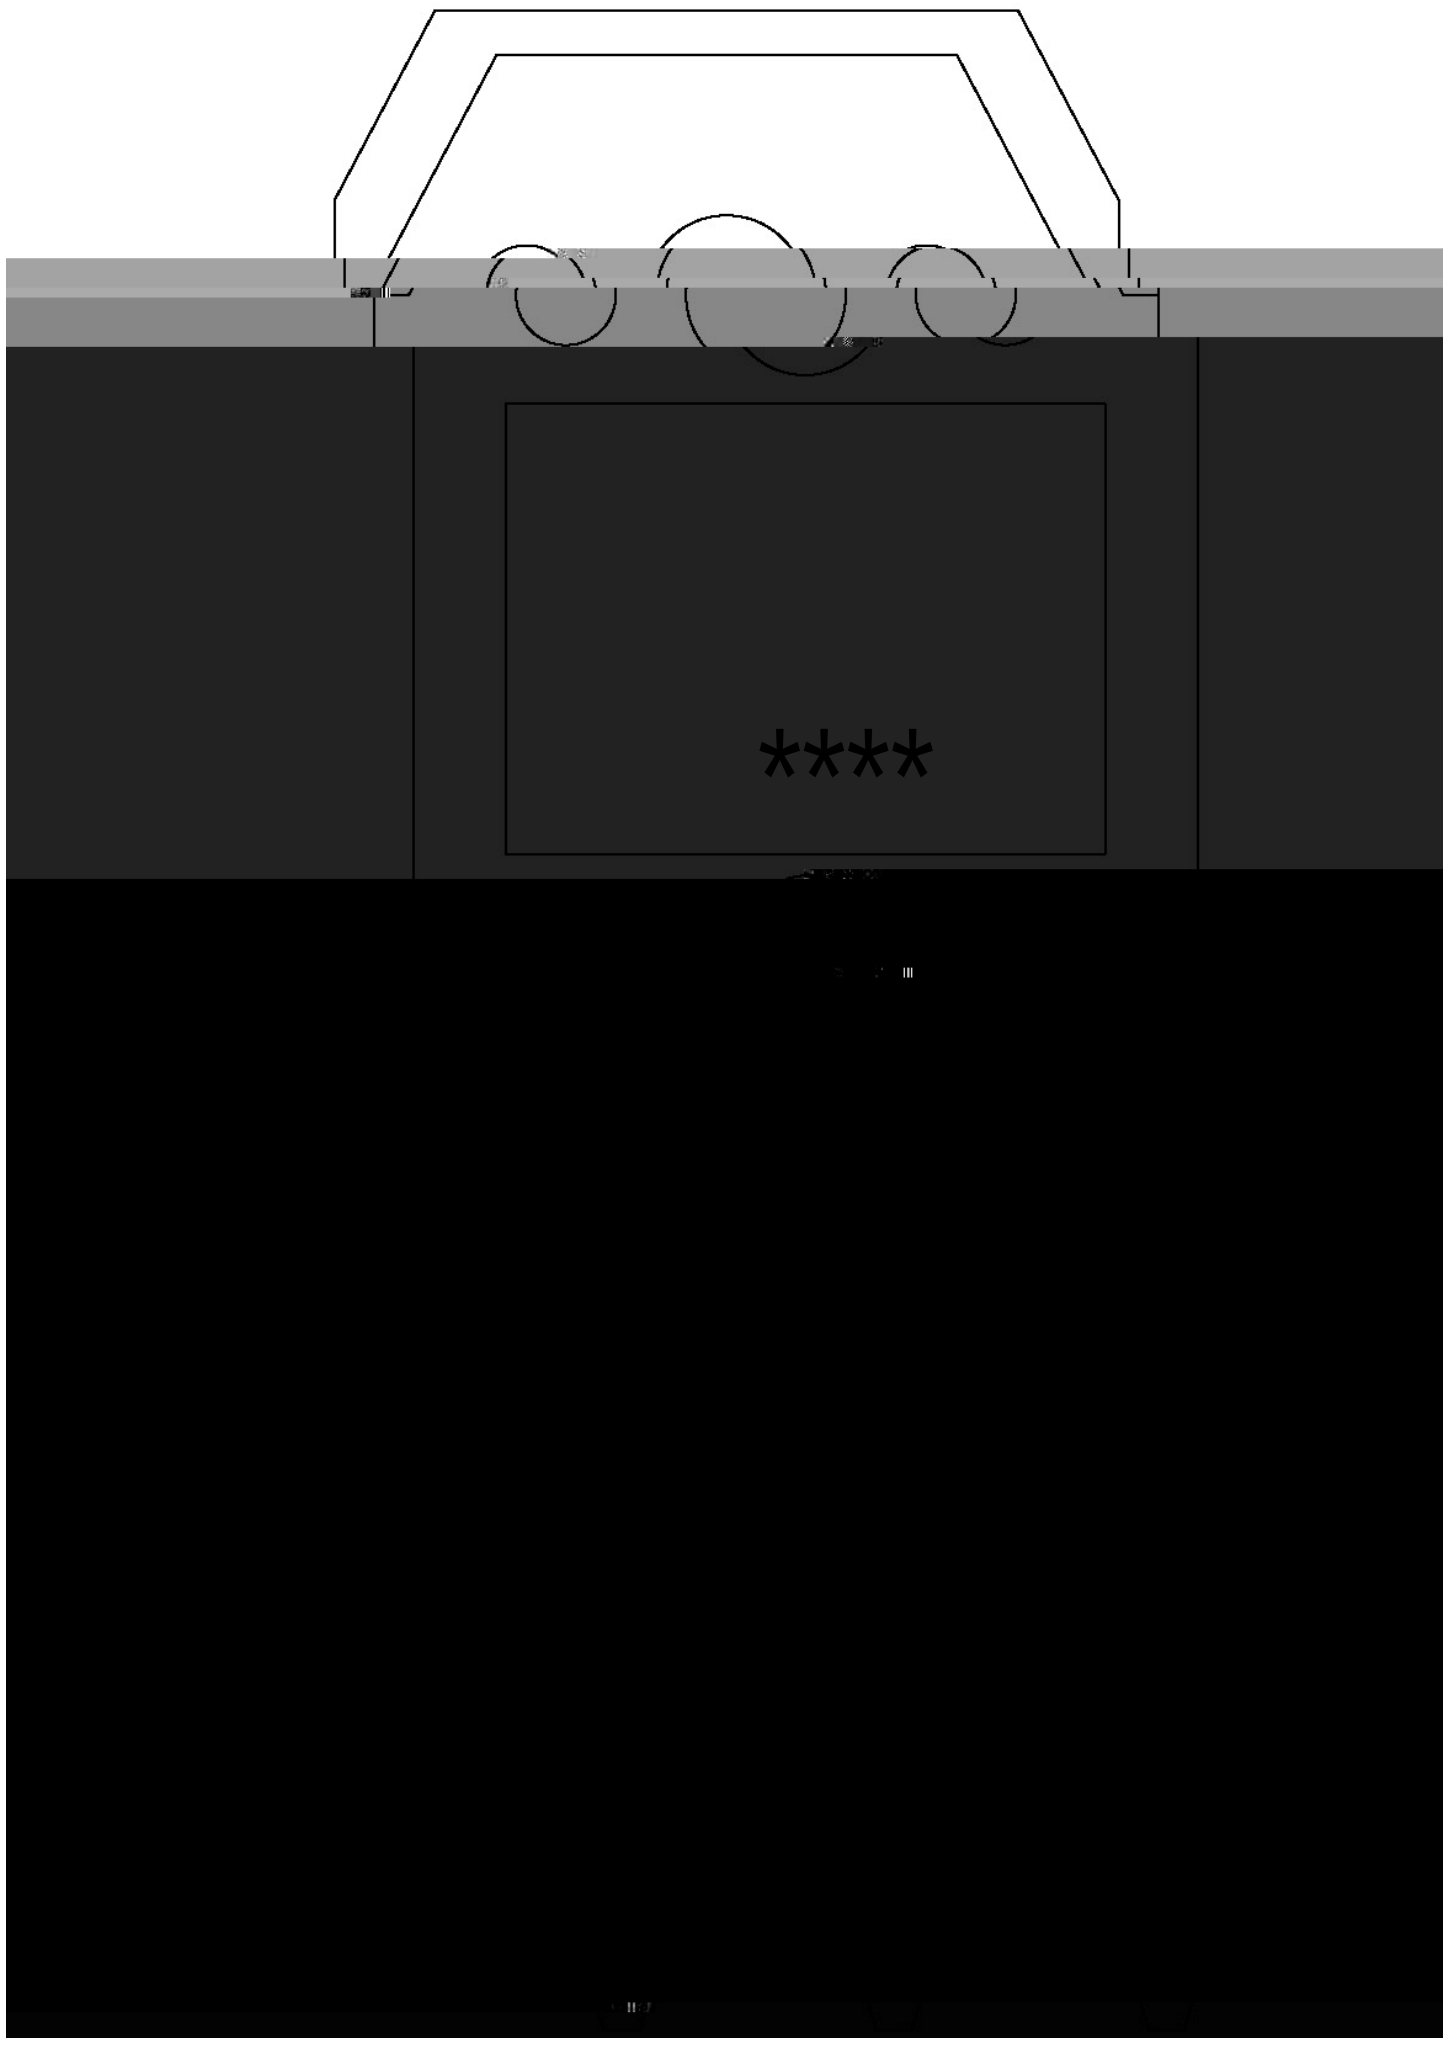

ب ˝ χ

EU꞉ ዡ ३ ᴻ Ⴊ

J53Q453G χ ዡ ғ ᵝ ʒ ᴺ

---- χ ዡ · ғ ῆ ᴺ Ⴊ ˡ ɞ · ғ ῆ ᴺ ᴪ ק

( ) / Temperature Profile for Dip Soldering(Pb-Free)

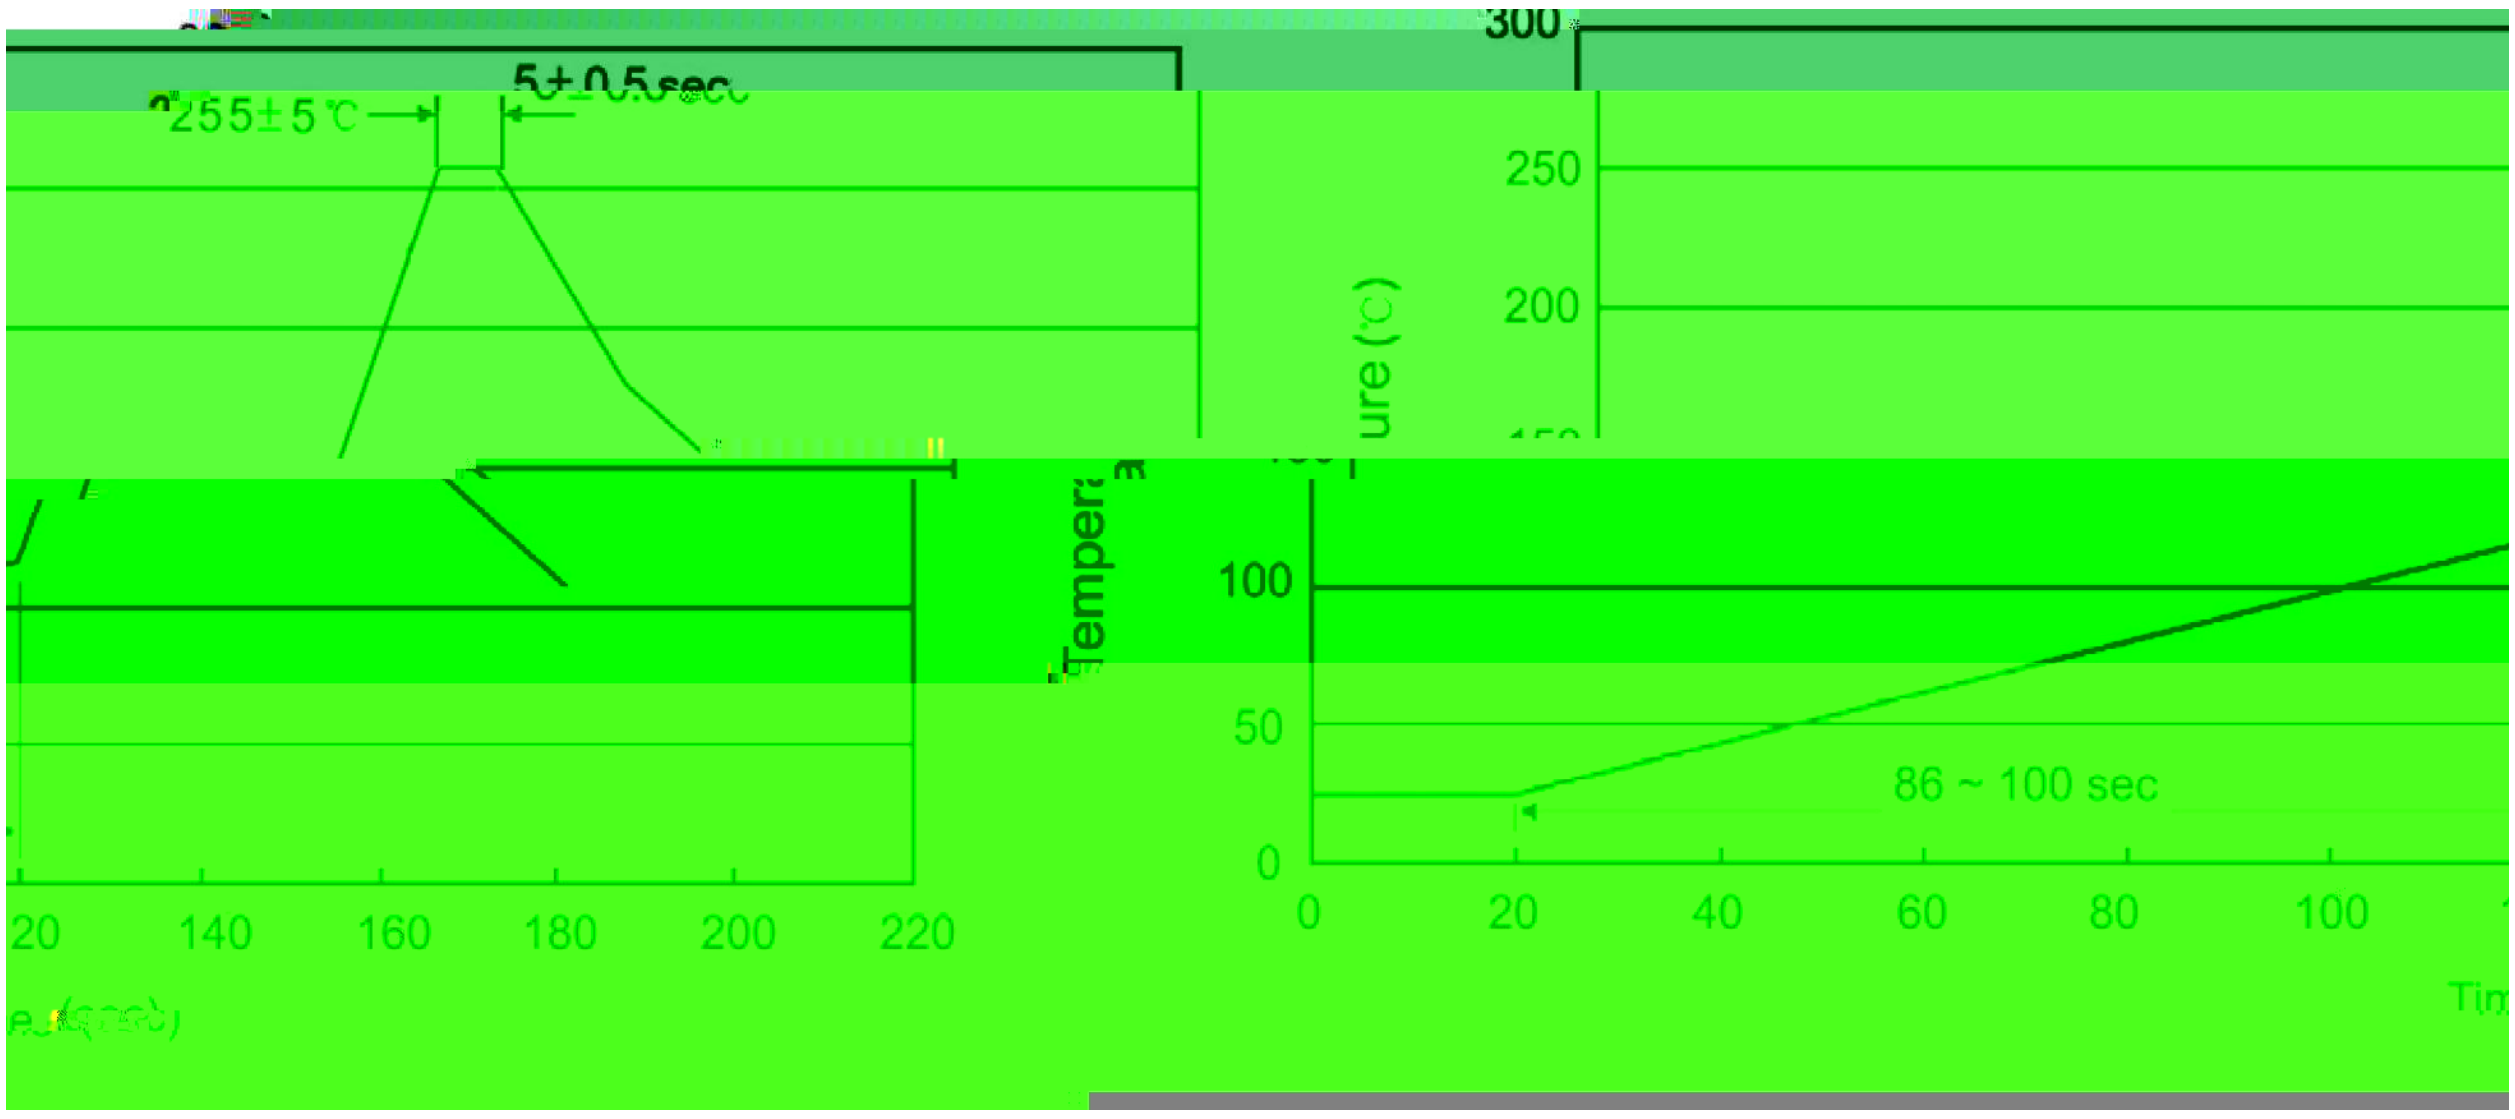

ب ˝ χ

ɩ́ ♬ □ ŷ̊ Ḱ ɫ ı ̀H ڗ Ḱ ɫ

Ś Ӫ □ ŷ̊ ° ɫ ı ̀H ڗ ̒Y ʎ ㇶ ° ° ɫ °

ì ̇ Ꭹ ̡ ɔ ھ ŷ̊ ㇶ Ḱ ɫ ɫ

/ Resistance to Soldering Heat Test Conditions

□ ŷ̊ χ ° ɫ ̀H ڗ χ °

/ Packaging SPEC.

̮̬ ꞁ ɣ ꞓ

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-3P	30	15	450	5	2250	497.5×46×8	555×164×50	575×290×180

/ Notices